




Lighting-Power-Control



PRIMO Q 30E 180 M ST

RDF.TM.PQ.3ESTM800W

Suspended Multiple Sided Internally Illuminated
Metal Hanging 30m Exit Sign

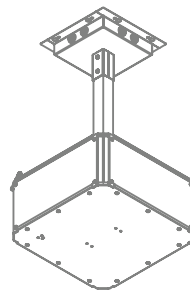

Metal ceiling bracket accessory
also available in 2 heights.

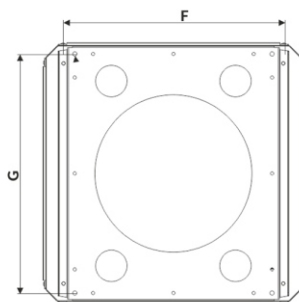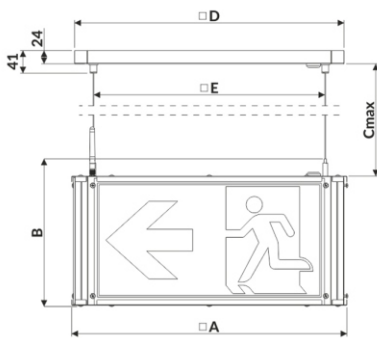

PARAMETERS

Warranty	3 years battery 2 years
IP	IP20
IK	IK05
Version	standard (key switch test)
Power supply	210 to 250 V AC
Temperature range	+5 to 40 °C
Material	metal and PC
Colour	white, RAL9003
Duration time	3 hours
Operating mode	M (maintained)
Active power	3.01 W
Insulation class	1
Luminance	>150 cd/m ²
Viewing distance	30m
Battery	3.2V 1.5Ah LiFePO ₄ /C

PRIMO Q	A	B	Cmax	D	E	F	G	H**
30	399	217	5000	388	320	277	356	275
40	499	267	5000	488	420	377	456	325

FEATURES

- Suitable for low and high ceilings (adjustable suspension cable up to 5m length)
- 30m viewing distance (40m also available)
- Also available in Auto-test, DATA2 addressable, DALI and central battery variants
- All PRIMO products available in white, black, polished chrome and satin chrome
- Metal ceiling mounting bracket (no cables version) available: code RDF.TM.Q30.CBracketXX
- State arrow directions for each side when ordering (blank sides white or black)

