




Lighting-Power-Control

ONTEC G E1P 301 M DALI BLACK

Part Code: RDF-OG.EPDDAM300B

Ceiling and Wall Mount Dual-Sided DALI Exit Sign with Laser Etched Light Blade for high visibility. Optional Recessing Kit.

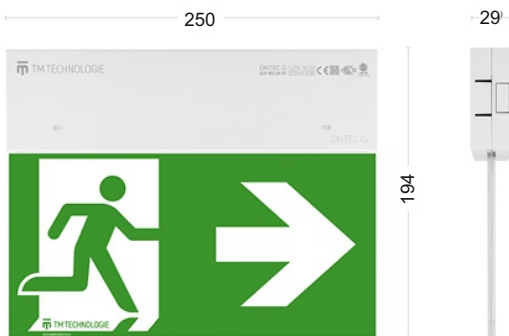

PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN 62471, EN 1838
Warranty	5 Years Battery 2 years
IP	IP20
IK	IK05
Version	DALI dimming and monitoring
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 35 °C
Material	PC (metal version is PRIMO G)
Colour	black (also in white and other colours)
Duration time	3 hour
Operating mode	M (maintained / non-maintained)
Maximum light power	1.8 W
Active power	6.7 W
Insulation class	2
Luminance	>300 cd/m ²
Viewing Distance	25 m
Battery	LiFePO ₄ /C 6.4V 1.5Ah

FEATURES

- Laser etched light blade provides very high backing light uniformity and therefore sign visibility
- Standard, auto-test and DATA2 addressable versions available for all ONTEC G variants
- Also available as a 24V, 50V, 110V and 220V AC/DC slave fitting for central battery systems
- Recessing kit available, see RDF website for details

