




Lighting-Power-Control

# ITECH M2 302 M DATA2

Part Code: RDF-TM-IT.M2.DDM360W

Surface-Mount 170mm Round IP65 Downlight with Addressable DATA2



## PARAMETERS

Standards	EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN 62471, EN 1838
Warranty	5 years battery 2 years
IP	IP65
IK	IK06
Version	DATA2 – addressable central test
Power supply	210 to 250 V AC 50 to 60 Hz
Temperature range	+10 to 40 °C
Material	PC
Colour	white (also in black and other colours)
Duration time	3 hour
Operating mode	M (maintained / non-maintained)
Maximum light power	2.0 W
Active power	6.4 W
Insulation class	2
Luminous flux	270 lm
Battery	LiFePO <sub>4</sub> /C 6.4V 1.5Ah

## FEATURES


- ITECH versions also available including wireless, standard (no-test), auto-test (self-test), DALI and central battery
- Multiple options including higher light output, corridor lens, and cold version for low temperature use
- Removable collar allows for recessing, contact us for recess kit fixings.



# ITECH M2 302 M AT

Part Code: RDF-TM-IT.M2.DDM360W

Surface-Mount 170mm Round IP65 Downlight with Addressable DATA2

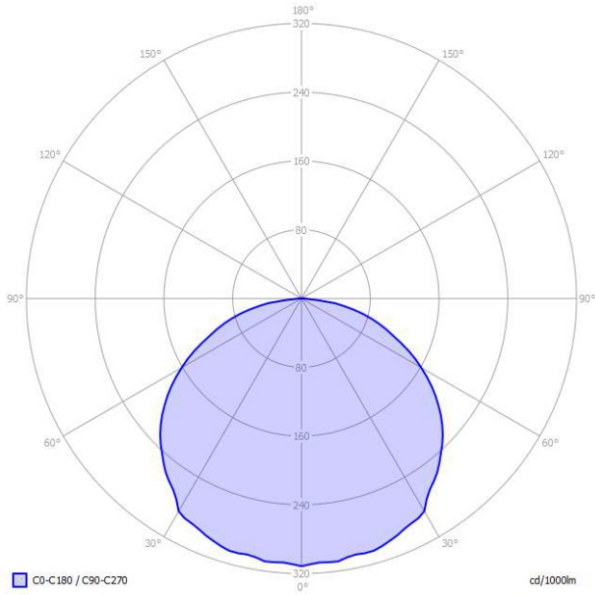

## PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2.5	4.0	9.3
3.0	4.2	10.5
4.0	4.5	12.0
5.0	4.7	13.5
6.0	4.9	14.4
7.0	4.8	15.0
8.0	4.8	15.7
9.0	4.7	16.0
10.0	4.5	16.2

