




Lighting-Power-Control

RINO M1 301 M AT

Part Code: RDF-RN.M1.AT076

Recessed 120mm Round Downlight with Auto-Test

DISCONTINUED, Replaced by ONTEC C

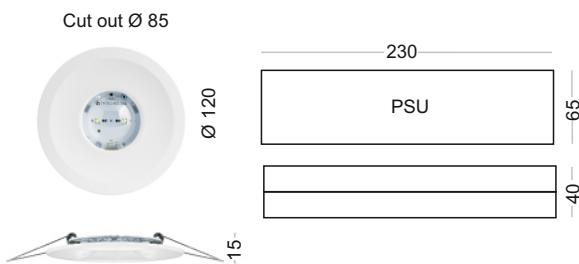

PARAMETERS

| | |
|---------------------|---|
| Standards | EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 55015, EN 61000-3-2, EN 62031, EN 62471, EN 1838 |
| Warranty | 5 years battery 2 years |
| IP | IP44/20 |
| IK | IK08 |
| Version | AT – automatic test (self-test) |
| Power supply | 210 to 250 V AC 50 to 60 Hz |
| Temperature range | +10 to 40 °C |
| Material | PC + Metal |
| Colour | white (also in black and other colours) |
| Duration time | 3 hour |
| Operating mode | M (maintained / non-maintained) |
| Maximum light power | 3.2 W |
| Active power | 4.0 W |
| Insulation class | 2 |
| Luminous flux | 146 lm |
| Battery | Ni-Cd HT 3.6V 1.5Ah |

FEATURES

- Rino versions also available including standard (no-test), addressable and DALI
- Multiple options including higher light output and corridor lens available, contact us for details




DISCONTINUED, Replaced by ONTEC C

RINO M1 301 M AT

Part Code: RDF-R.M1.AT006

Recessed 120mm Round Downlight with Auto-Test

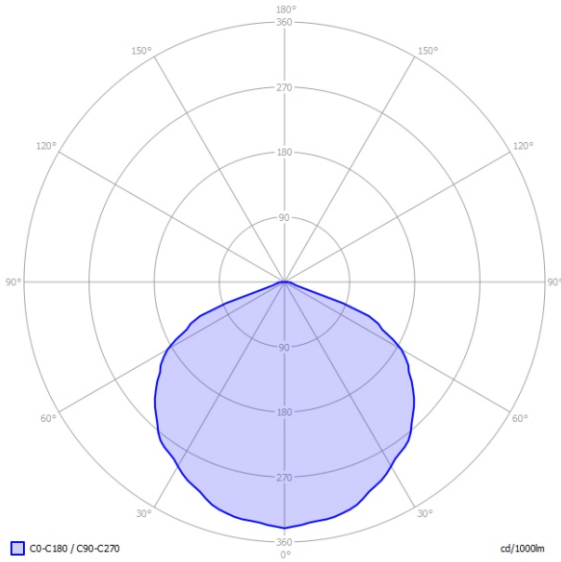

PHOTOMETRY [m]

| Ceiling height | Distance wall - fitting | Distance fitting - fitting |
|----------------|-------------------------|----------------------------|
| 2.5 | 3.2 | 7.0 |
| 3.0 | 3.5 | 8.0 |
| 4.0 | 3.9 | 9.5 |
| 5.0 | 3.9 | 11.2 |
| 6.0 | 3.7 | 12.2 |
| 7.0 | 3.4 | 12.6 |
| 8.0 | 3.3 | 12.4 |
| 9.0 | 3.0 | 12.0 |
| 10.0 | 2.8 | 11.2 |

Ref: TM-R.M1.AT006, TM-RN.M1.AT076,
TM-RN.M1.ST075

