


2.3" PENDANT LED


ARCHITECTURAL LED LUMINAIRE DROP CEILING

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

▶ POWER FEED

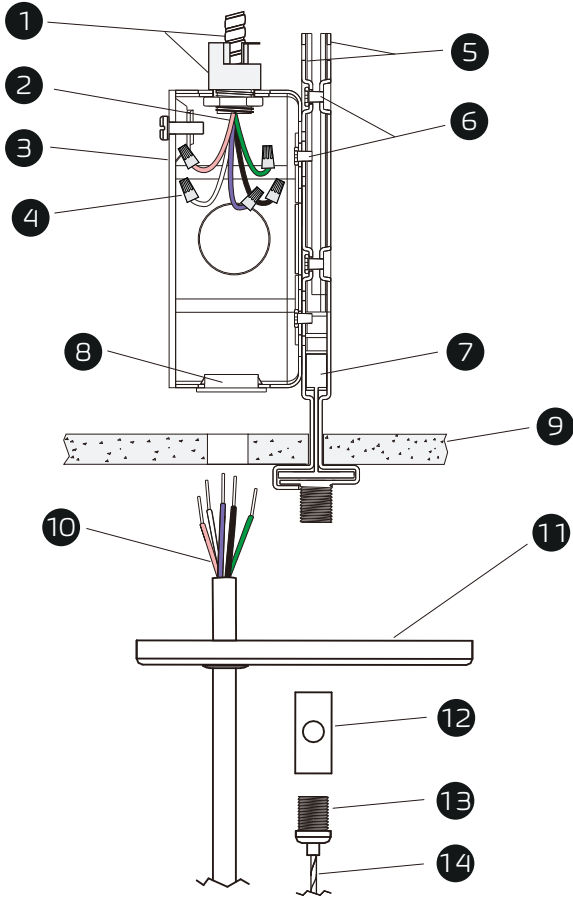


▶ NON POWER SUSPENSION

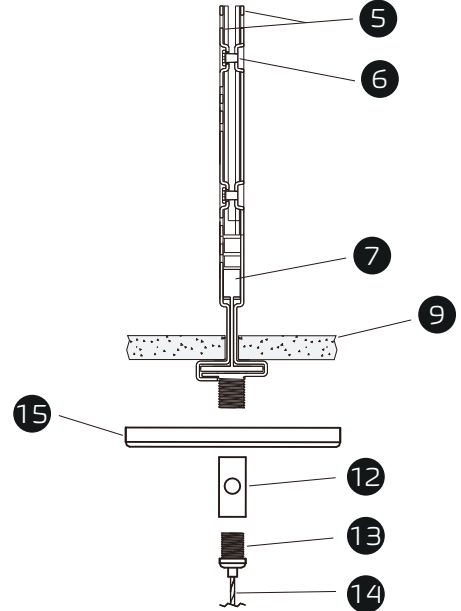


▶ PARTS LIST


- 1 Armored Cable & Connector (By Others)
- 2 Power Cord (By Others)
- 3 4" Octagon Junction Box
- 4 Wire Nut
- 5 Assembled T-grid Clips
- 6 Screw 6#*4
- 7 T-grid (By Others)
- 8 Plastic Grommet
- 9 Ceiling Tile (By Others)
- 10 Power Cord
- 11 4" Canopy Power Feed
- 12 Cable Holder
- 13 Strain Relief Thread Nut
- 14 Aircraft Cable
- 15 2" Canopy




3 4" Octagon Junction Box




4 Wire Nut




5 Assembled T-grid Clips




6 Screw 6#*4




8 Plastic Grommet




10 Power Cord




11 4" Canopy Power Feed




12 Cable Holder



13 Strain Relief Thread Nut



14 Aircraft Cable




15 2" Canopy

2.3" PENDANT LED


ARCHITECTURAL LED LUMINAIRE DRY CEILING

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

▶ POWER FEED

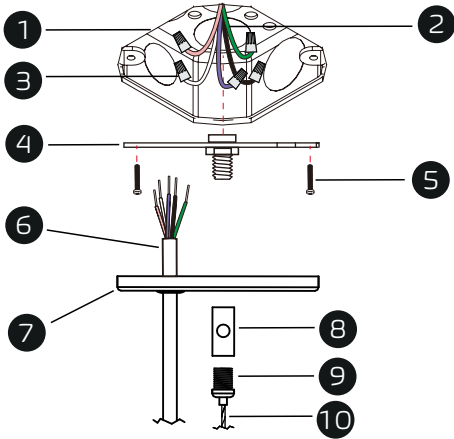


▶ NON POWER SUSPENSION

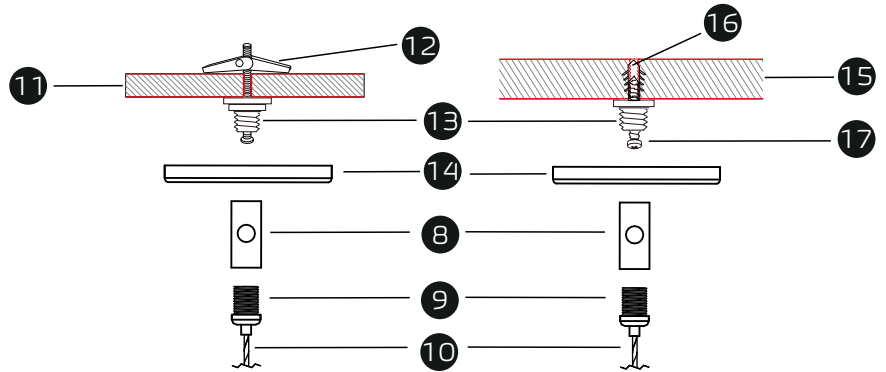


▶ PARTS LIST


- 1 4" Octagon Junction Box (By Others)
- 2 Power Cord (By Others)
- 3 Wire Nut
- 4 Junction Box Crossbar
- 5 Screw PM4*22
- 6 Power Cord
- 7 4" Power Canopy Kit
- 8 Cable Holder
- 9 Strain Relief Thread Nut
- 10 Aircraft Cable
- 11 Drywall Ceiling (By Others)
- 12 Butterfly Drywall Anchor
- 13 Crimp Stud
- 14 2" Canopy
- 15 Solid Ceiling (By Others)
- 16 Anchor
- 17 Screw PA4*30




Wire Nut




Junction Box Crossbar




Screw PM4*22




Power Cord




4" Canopy Power Feed




Cable Holder




Strain Relief Thread Nut




Aircraft Cable



Butterfly Drywall Anchor




Crimp Stud



2" Canopy



Anchor



Screw PA4*30

2.3" PENDANT LED

ARCHITECTURAL LED LUMINAIRE INDEPENDENT INSTALLATION


⚠️ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

IMPORTANT

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.
8. The maximum connection of each input line is 40FT(1200CM) in 120AC, 80FT (2400CM) in 230AC, 100FT(3000CM) in 277AC.

SHOCK HAZARD

⚡ May result in serious injury or death. Turn power OFF at circuit breaker prior to installation or servicing.



PRE-INSTALLATION

Assemble Power Cord

1. Take off the end cap, insert the cord holder into the power code location as shown.
2. Take off LED modular, thread the power code into the cord holder as shown.
3. Wiring Must connect connectors with corresponding colors as shown.
4. Fix the power code with holder nut, remount LED modular and end cap.

INDEPENDENT INSTALLATION

1 Hang Luminaire

Mounting Points:
 1.92' for 2FT fixture
 2.92' for 3FT fixture
 3.92' for 4FT fixture
 7.88' for 8FT fixture

Screw both bottom parts of aircraft cables clockwise and secure then on the top of housing making sure they hang the lights.


2 Complete

Cable Tie

Use the cable tie to keep the electric wire going up along with the wire rope.

Note: Adjust the height of luminaire. Luminaire can be raised by pulling cable through the gripper and can be lowered by depressing the top cylinder on the gripper which pulls the luminaire down.

WIRING

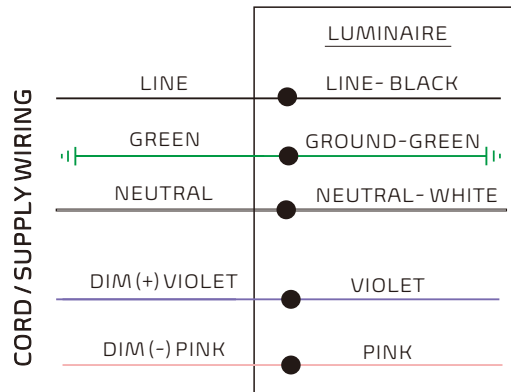


Please isolate two dimming wires by P2 terminal individually if no need dimming;
MUST connect wires with corresponding colors as shown.

2.3" PENDANT LED

ARCHITECTURAL LED LUMINAIRE MULTIPLE LUMINAIRES CONNECTION

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

JOINER OPTIONS

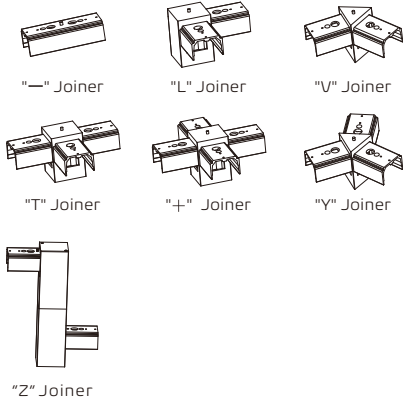

Note: It needs 2 inputs if using joiner "T", "+" and "Y".


ACCESSORY






Note: Silicone seal is used to seal seams that may appear at both ends of luminaires when multiple connections.

BEFORE CONNECTING



Disassemble Luminaires

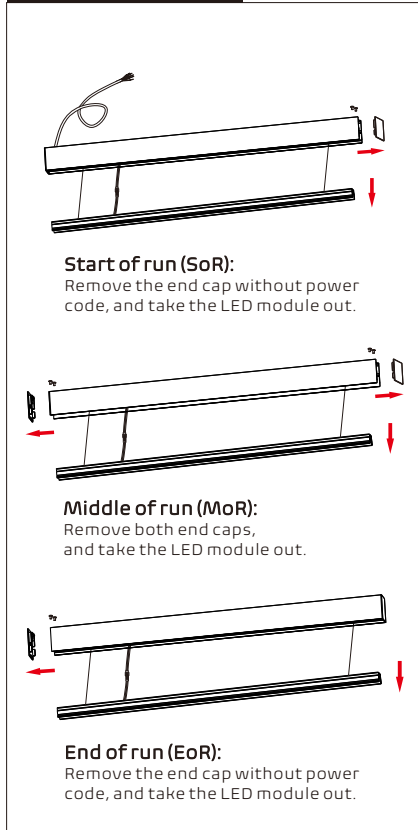

LINE CONNECTION

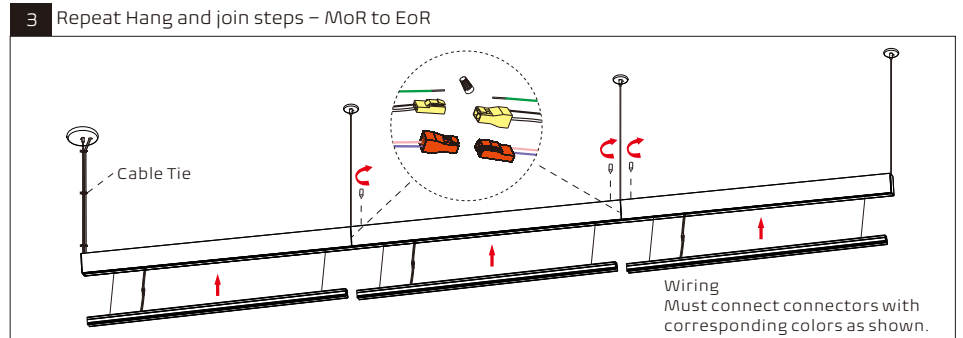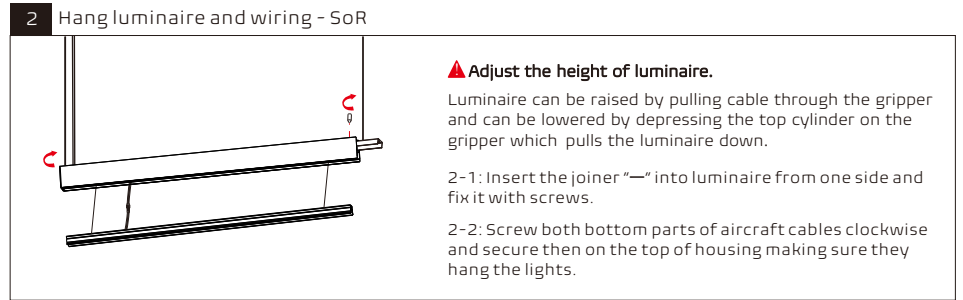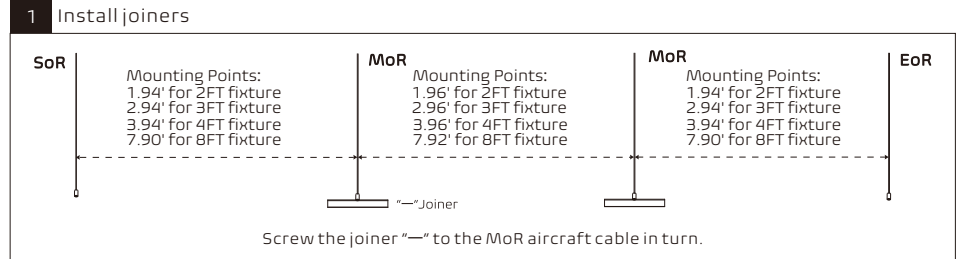

3-1: Zip tight power cord & aircraft suspension cable with the cable tie.
 3-2: Connect the quick connectors properly.
 3-3: Insert all the LED Modules into the housing from SoR to EoR in turn.

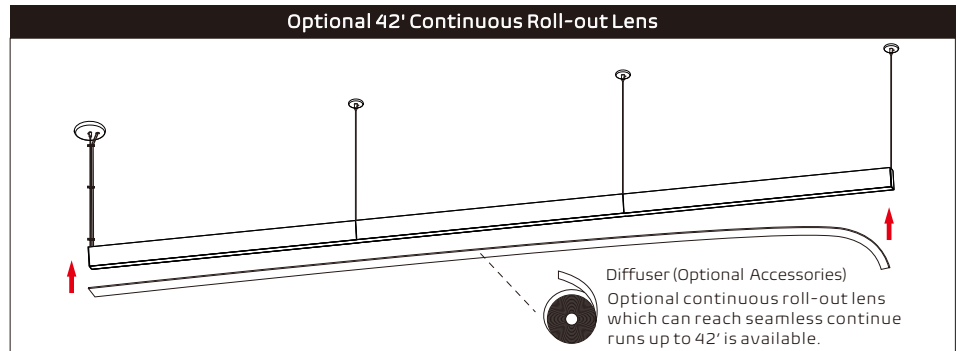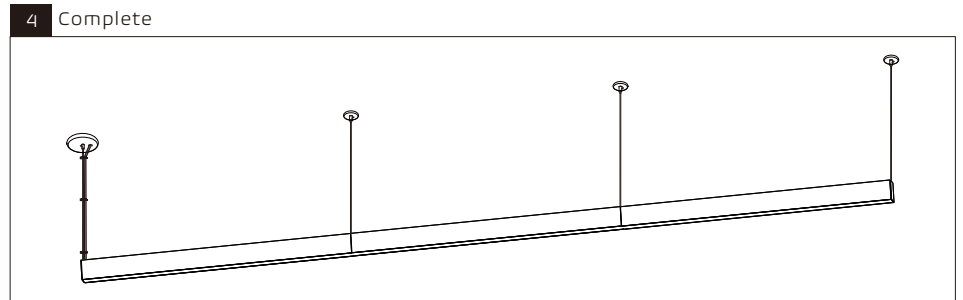

2.3" PENDANT LED


ARCHITECTURAL LED LUMINAIRE MULTIPLE LUMINAIRES CONNECTION

⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


L SHAPE CONNECTION

- ▲ For "T", "+", "Y" shape or other geometric shapes, all subject to the "L" shape installation
- ▲ It needs 2 inputs if using joiner "T", "+" and "Y".

1 Install joiners

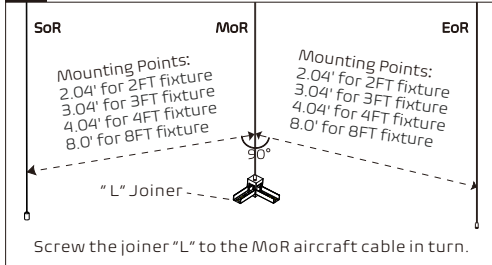


2 Hang luminaires and join

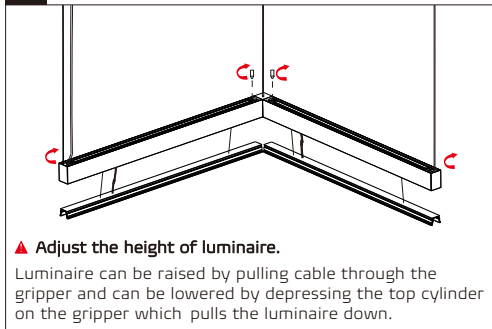

2-1: Insert the joiner "L" into luminaire from one side and fix it with screws.

2-2: Screw both bottom parts of aircraft cables clockwise and secure then on the top of housing making sure they hang the lights.

3 Connect

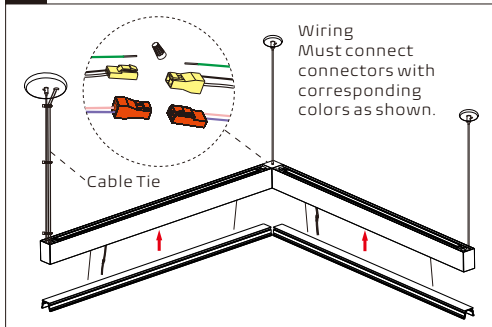


3-1: Zip tight power cord & aircraft suspension cable with the cable tie.

3-2: Connect the quick connectors properly.


3-3: Insert all the LED Modules into the housing from SoR to EoR in turn.

4 Complete

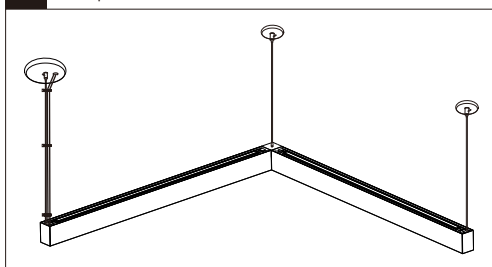


Z SHAPE CONNECTION


1 Connect the Z joiner

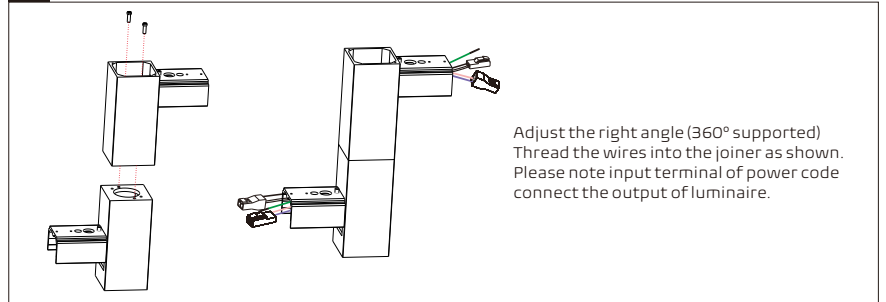

2 Hang luminaire and wiring - SoR

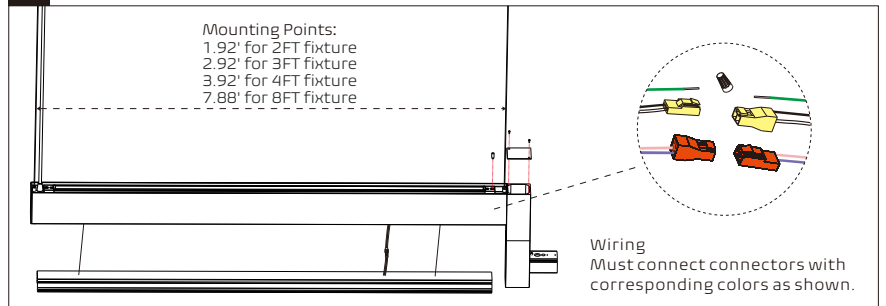

3 Repeat Hang and join steps - MoR to EoR

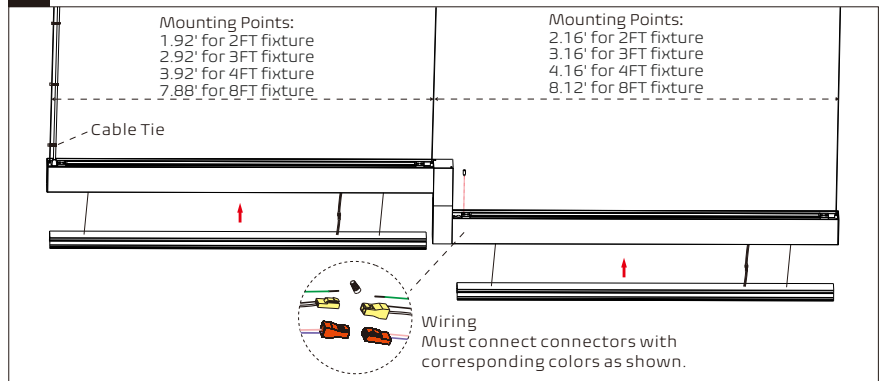

4 Complete

