



App available for download for iOS and Android.





Specifications:

Voltage: 10-30vDC

Channels IN: 4

Channels OUT: 4 - 10 Amps Per CH

Max load: 40 Amps across all CH

LAN: 10/100 Base T

IP Rating: IP65, Completely Sealed

Housing: UV Resistant Composite Plastic

Key Features:

- On-board lighting control through a compatible MFD or connected smart device (app available for Android and Apple).
- Create lighting scenes, custom button functions and control color selection and dimming.
- Create virtual circuits on a single channel with no additional wire runs.
- Completely sealed compact control module works with standard 2-wire system.
- · Compatibly with Pico S8 and C4 Expansion Modules.
- · 3 Year warranty proudly designed and manufactured in the USA.

PLI Enabled:

PLI (Power Line Instruction) is Lumitec's proprietary technology that provides advanced functionally to multi-mode lights. Any Lumitec product that is PLI enabled and connected to a Poco Digital Lighting Control module will allow functions like, color change, color selection, dimming, and advanced features such as preset custom color modes and virtual circuits. Non PLI lights will have limited function.



Power Line Instruction

Requires PLI enabled lights to access full lighting control features. Look for the PLI icon on compatible product packaging.

Poco 3 Digital Lighting Control

Poco 3 Digital Lighting Control delivers powerful, low cost on-board lighting control through a compatible MFD or connected smart device through a completely sealed, easy to install control module. Poco 3 offers sophisticated lighting control previously found only on high end yachts. When installed with Lumitee's PLI-enabled lights even more functionality is unleashed. Create lighting scenes, custom button functions and control color selection and dimming. Add a Pico S8 or C4 Expansion Module to expand functionality even further and connect third party RGB accessories or assign Poco virtual commands to physical switches.

Product Details:

SKU	FINISH	CHANNELS	VOLTAGE
101699	White	Four - 10 amps per ch	10-30vDC

Features:







er Line ruction



2-Wire










Dimensions:

Poco 3 - Digital Lighting Control Module

 Width:
 5.5in (13.97cm)

 Height:
 3.5in (8.89cm)

 Depth:
 1.24in (3.14cm)

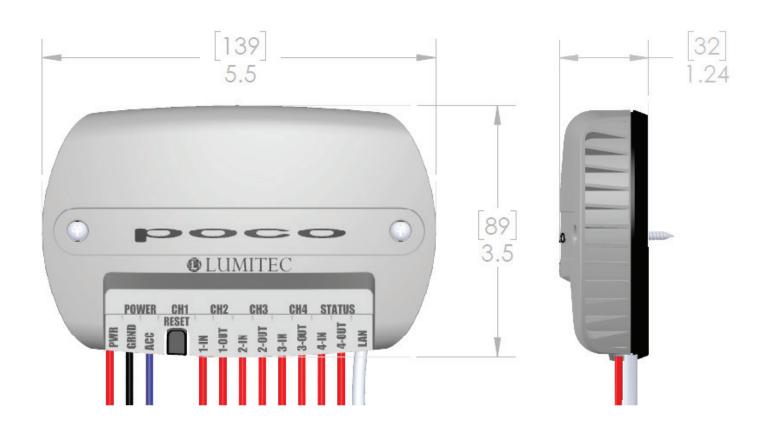

MFD Compatibility	
MANUFACTURE	MODEL
Garmin	GPSAMAP 7-12X3xsv, GPSMAP 8X10-24
Simrad	NSO EVO3, NSO EVO2, NSS EVO3, Go
B&G	Zeus3 Glass Helm, Zeus3, Vulcan,
Lowrance	HDS Live, HDS Carbon
Raymarine	Axiom, Axiom Pro or Axiom XL