



- NOTES:
1. CONCRETE STRENGTH = MIN. 4500 PSI
 2. #3 REBAR(BOTTOM) #4 REBAR(LID) 1' ON CENTER
 3. "POLYLOK" PIPE SEALS CAST IN TANK
 4. MASTIC SEALANT IN TANK JOINT
 5. TANKS CAN BE MODIFIED UPON REQUEST
 6. DROP IN BAFFLES MADE TO SPECIFICATIONS

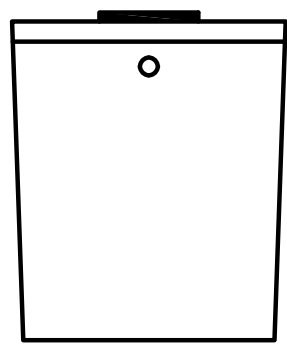

FRONT VIEW
 APPROX. WEIGHT:
 TOP = 3,000 lb
 BOTTOM = 5,426 lb
 TOTAL = 8,426 lb

SIDE VIEW
 GAL. PER IN = 23.8
 ACTUAL GAL. TO OUTLET = 1,142
 FULL CAPACITY = 1,428

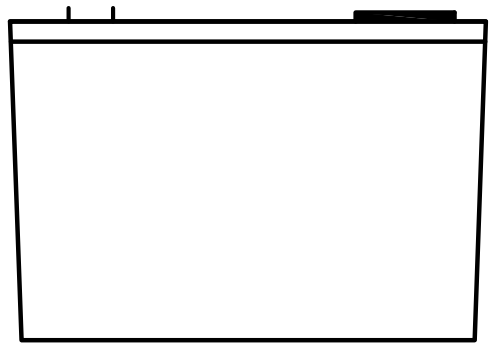

CTJAMISON.COM
 PH: 540-483-5944

1,000 Gal. Advantex Pump Chamber

Date	Feb 2016		
------	----------	--	--