



- NOTES:
1. CONCRETE STRENGTH = MIN. 4500 PSI
 2. #4 REBAR AT 1' O.C.
 3. "POLYLOK" PIPE SEALS CAST IN TANK
 4. MASTIC SEALANT IN TANK JOINT
 5. TANKS CAN BE MODIFIED UPON REQUEST
 6. POURED IN BAFFLES MADE TO SPECIFICATIONS

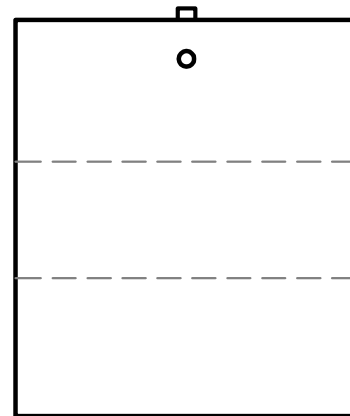

APPROX. WEIGHT:
 TOP = 12,900 lb
 BAFFLE = 5,600 lb
 BOTTOM = 12,900 lb
 TOTAL = 31,400 lb

GAL. PER IN = 53.35
 ACTUAL GAL. TO OUTLET = 4,214
 FULL CAPACITY = 4,801

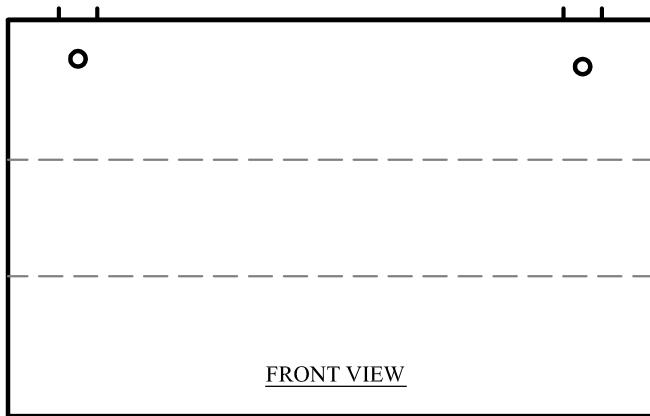

CTJAMISON.COM
 PH: 540-483-5944

4,000 Gal. Multi Seam Tank

Date
 Feb 2016

Scale
 Not To Scale