


# LONG RANGE POWER



***POWER. ANYWHERE.***



- **MOBILE – USE INDOORS OR OUTDOORS**
- **240VAC/12KW PEAK OUTPUT**
- **4KW OF SOLAR CHARGING**
- **15KWH OF BATTERY STORAGE**
- **CHARGE FROM SOLAR, GENERATOR OR A 12VDC ALTERNATOR**

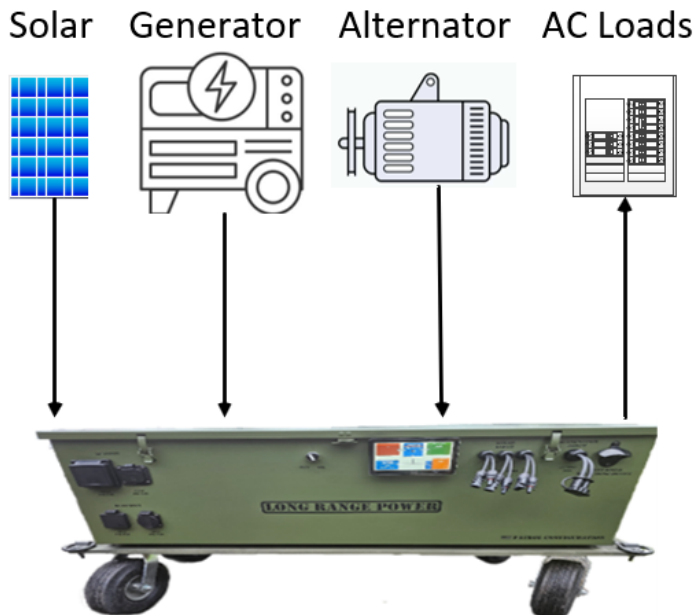

**LONG RANGE POWER'S HYBRID GENERATOR MAKES OFFGRID POWER EASY FOR ANYONE.**

**DO YOU WANT A GENERATOR THAT DOES NOT HAVE TO BURN FUEL BUT CAN IF IT NEEDS TO?**

**RUN YOUR ESSENTIAL AC LOADS FROM THE SUN OR A GENERATOR OR EVEN YOUR VEHICLE'S 12V BATTERY.**

**MEANT FOR RUGGED LONG RUNNING POWER ANYWHERE**

## PATROL CONFIGURATION SPECIFICATIONS

<b>MODEL</b>	<b>P240</b>
<b>NOMINAL AC OUTPUT VOLTAGE</b>	<b>120/240VAC (SPLIT PHASE)</b>
<b>NOMINAL AC INPUT VOLTAGE</b>	<b>120/240VAC (SPLIT PHASE)</b>
<b>CONTINUOUS RATED AC POWER</b>	<b>6KW</b>
<b>PEAK RATED AC POWER</b>	<b>12KW</b>
<b>NAMEPLATE BATTERY CAPACITY</b>	<b>15KWH LFP</b>
<b>MAXIMUM RATED SOLAR OUTPUT POWER</b>	<b>4KW</b>
<b>MAXIMUM RATED SOLAR INPUT VOLTAGE</b>	<b>250VDC</b>
<b>NOMINAL ALTERNATOR CHARGE VOLTAGE</b>	<b>12VDC</b>
<b>MAXIMUM ALTERNATOR CHARGING AMPS</b>	<b>30ADC</b>
<b>LOCAL INTERFACE</b>	<b>5" TOUCHSCREEN</b>
<b>COMMUNICATIONS</b>	<b>BLUETOOTH, WIFI, ETHERNET</b>
<b>AC INPUT CONNECTIONS</b>	<b>L14-30P, 5-15P</b>
<b>AC OUTPUT CONNECTIONS</b>	<b>L14-30R, 5-20R</b>
<b>SOLAR CONNECTIONS</b>	<b>MC4</b>
<b>ALTERNATOR CONNECTIONS</b>	<b>30AMP ANDERSON CONNECTOR</b>
<b>ENVIRONMENTAL RATING</b>	<b>NEMA3R</b>
<b>DIMENSIONS (ENCLOSURE)</b>	<b>(HXWXD – IN): 17.5 X 51.25 X 26.0</b>
<b>WEIGHT</b>	<b>~475LBS</b>
<b>OPTIONS</b>	<b>WHEELED BASE</b>