




STEVENS

MB-8

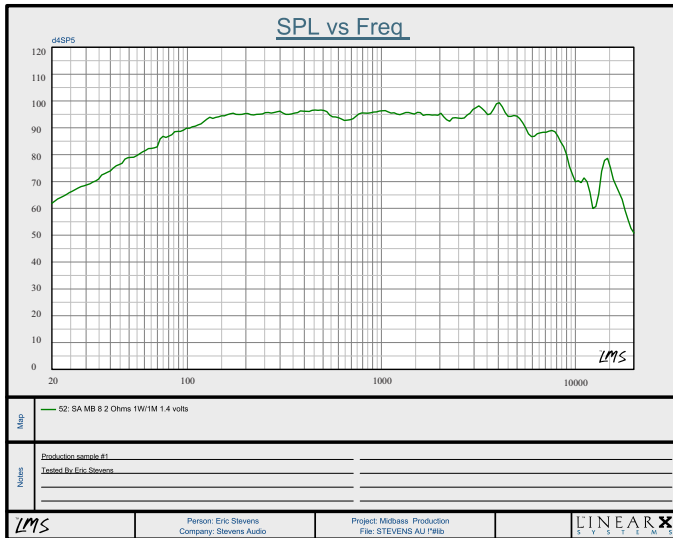

MB-8 T/S Parameters

Nom. Imp	2 ohms
Revc	1.7ohms
10Khz Le	.229
Fo	56Hz
Bl	5.9 tm
Qms	8.6
Qes	.27
Qts	.27
Sd	220 cm ²
VAS	31.6
Mmd	15.7g
2.83v SPL	101.67
VCid	50.8mm
p-p Xmax	11mm

Nom. Imp	4 ohms
Revc	3.3ohms
10Khz Le	.358
Fo	57Hz
Bl	7.6 tm
Qms	6.9
Qes	.32
Qts	.30
Sd	220 cm ²
VAS	30.9
Mmd	15.2 g
2.83v SPL	98.3
VCid	50.8mm
p-p Xmax	11mm

Product details and specifications

- Frequency response 60 Hz to 4Khz +/- 3dB
- Power recommendation: 50 to 450 watts per channel amplifier with minimal clipping and proper high-pass crossover.
- Sensitivity @ 4 ohm is 98dB @ 2.83 volts/1M or 95dB @ 1W/1M
- Mounting depth 3.5"
- Available in 2 ohm and 4 ohm versions

Midbass features:

- FEA optimized symmetrical field motor structure for low distortion
- Composite pulp cone water proof front and rear with damped nomex surround
- Conex spider for long life
- Voice coil overhang 8mm p-p or 4mm one way. Xmax 5.5mm+
- Die Cast aluminum basket for strength and heat dissipation.



www.facebook.com/stevensaudio