




LED3

Upad IV 2.6mm Indoor

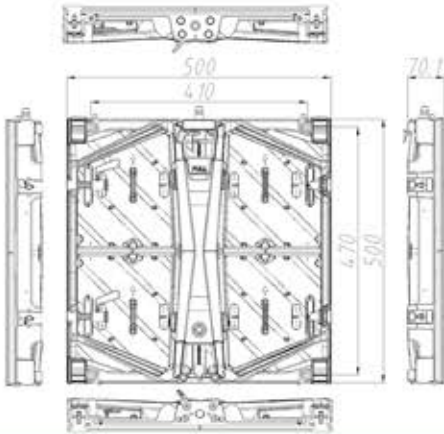

Parameter	Value	Parameter	Value
Pixel Pitch	2.6mm	Horizontal Viewing Angle	160
LED Type	3-in-1 Black SMD	Vertical Viewing Angle	160
Brightness	1200 cd/m ²	Contrast Ratio	6,000:1
Pixel Density	147,456 pixels/m ²	Input Power <Max>	160 W/panel
Pixels Per Panel	192x192 pixels	Input Power <Typical>	55 W/panel
Module Size	250mmx250mm	Input Voltage	100-240VAC
Panel Size	500mmx500mmx70.1mm(D)	Processing Depth	16 bit
Weight	6.3kg/panel	Scan Method	1/16
Maintenance	Front & Rear	Refresh Rate	3840@60Hz
Ingress Protection	IP30	Video Frame Rate	50/60Hz
Curve	Convex -5~+10 (Concave Optional)	Input Power Frequency	50-60Hz
Aspect Ratio	1:1	LED Life Time	100,000 Hours
Panel Area	0.25 m ²	Operating Temp/Humidity	14°F(-10°C)~+131°F(55°C) 10~80%RH
Rec. Viewing Distance	2.6mm	Storage Temp/Humidity	-4°F(-20°C)~+131°F(55°C) 10~80%RH
Environment	Indoor	Power Status	Diagnostic LEDs
Material	Die-Cast Magnesium	Standard Mounting Config	Hanging, Stacking
Calibration	Support Brightness & Chroma	Certification	TUV-CE/UL/CB/ FCC/IC/RoHS
Brightness Control	Manual/Automatic		
Color Temperature	2,000K - 9,300K Adjustable		

Please Note:

- Specifications are for reference based on normal temperature conditions (78F).
- Power consumption tolerance is ±15%, according to the installation site environment.
- The deviation of cabinet weight is about ±5% due to different measurements
- Specifications are for reference only and are subject to change without notice.