

Series: Amaya Technical Data

Glazed Porcelain Wood Inspiration



8 x 48 in / 19.8 x 120.1 cm Amaya Walnut Matte Pressed



8 x 48 in / 19.8 x 120.1 cm Amaya Walnut Matte Pressed

Technical Information

	WATER ABSORPTION	ANSI / ISO - (%)	< 0.5
	ABRASION RESISTANCE	ANSI / ISO	CLASS 4
	SCRATCH HARDNESS	ANSI / ISO - (Mohs)	7
	BREAKING STRENGTH	ANSI - (lbf) ISO - (N)	≥ 300 ≥ 1300
	SHADE VARIATION		V4
	SLIP RESISTANCE	ANSI - DCOF (WET) ISO - R VALUE	MATTE ≥ 0.55 MATTE R9
	CHEMICAL RESISTANCE	ANSI / ISO	CLASS A
	STAIN RESISTANCE	ANSI ISO	CLASS A CLASS 5
	FROST RESISTANCE	ANSI / ISO	PASS

Test values are based on ANSI / ISO standards according to: ANSI A137.1 - Porcelain tile P1 Class, ISO 13006 - G - Bia Group, En 14411 - G - Bia Group. Variances in test values can occur in different production lots.

Usage Recommendations

MATTE GLAZED PORCELAIN

APPLICATION		WALL	FLOOR
INTERIOR	RESIDENTIAL	•	•
	COMMERCIAL	•	•
	HEAVY COMMERCIAL	•	
EXTERIOR	RESIDENTIAL / COMMERCIAL	•	

* These recommendations are not defined by ANSI/ISO standards.

Amaya, Glazed Porcelain.

Natural weathered wood reinterpreted in porcelain. A collection of elegant shades and warm tones.

Highly contrasting earth tones with a great decorative value, offered in five color variations. This collection is offered in a variety of sizes including a classic long and wide plank style.






Product & Packaging Information			ASH ITEM CODE	BLEND ITEM CODE	NATURAL ITEM CODE	TOBACCO ITEM CODE	WALNUT ITEM CODE	LBS BOX	KGS BOX	PCS BOX	SQFT BOX	M ₂ *	BXS SKID	SQFT SKID	M ₂
ACTUAL DIMENSIONS	THICKNESS	MATTE	MATTE	MATTE	MATTE	MATTE	MATTE								
8 x 48 in / 19.8 x 120.1 cm AMAYA PRESSED GLAZED PORCELAIN TILE	198 x 1201 mm	10 mm	4500-0002-0	4500-0005-0	4500-0008-0	4500-0011-0	4500-0014-0	59.81	27.13	5	12.81	1.2	33	422.73	39.6
6 x 36 in / 14.8 x 90.2 cm AMAYA PRESSED GLAZED PORCELAIN TILE	148 x 902 mm	9 mm	4500-0001-0	4500-0004-0	4500-0007-0	4500-0010-0	4500-0013-0	46.81	21.23	8	12	1.08	39	468	42.12
6 x 24 in / 14.8 x 60.1 cm AMAYA PRESSED GLAZED PORCELAIN TILE	148 x 601 mm	9 mm	4500-0000-0	4500-0003-0	4500-0006-0	4500-0009-0	4500-0012-0	54.19	24.58	14	14	1.26	40	560	50.4

Stocked in 4 colors

Series: Amaya Technical Data

Tile Collection performance based on industry standards

Technical Information

	WATER ABSORPTION	ANSI / ISO - (%)	< 0.5%
	ABRASION RESISTANCE	ANSI / ISO	CLASS 4
	SCRATCH HARDNESS	ANSI / ISO - (Mohs)	7
	BREAKING STRENGTH	ANSI - (lbf) ISO - (N)	≥300 ≥1300
	SHADE VARIATION		V4
	SLIP RESISTANCE	ANSI - DCOF (WET) ISO - R VALUE	MATTE ≥0.55 (ID, IW, IW+, EW , O/G) MATTE R9
	CHEMICAL RESISTANCE	ANSI / ISO	CLASS A
	STAIN RESISTANCE	ANSI ISO	CLASS A / CLASS 5
	FROST RESISTANCE	ANSI / ISO	PASS

Test values are based on ANSI / ISO standards according to: ANSI A137.1 - Porcelain tile P1 Class, ISO 13006 - G - Bia Group, En 14411 - G - Bia Group. Variances in test values can occur in different production lots.




8 x 48 in/19.8 x 120.1 cm Amaya Walnut Matte Pressed Glazed Porcelain Tile

Series: Amaya Product Data

Colors at a Glance

Highly contrasting earth tones with a great decorative value, offered in 5 colors.

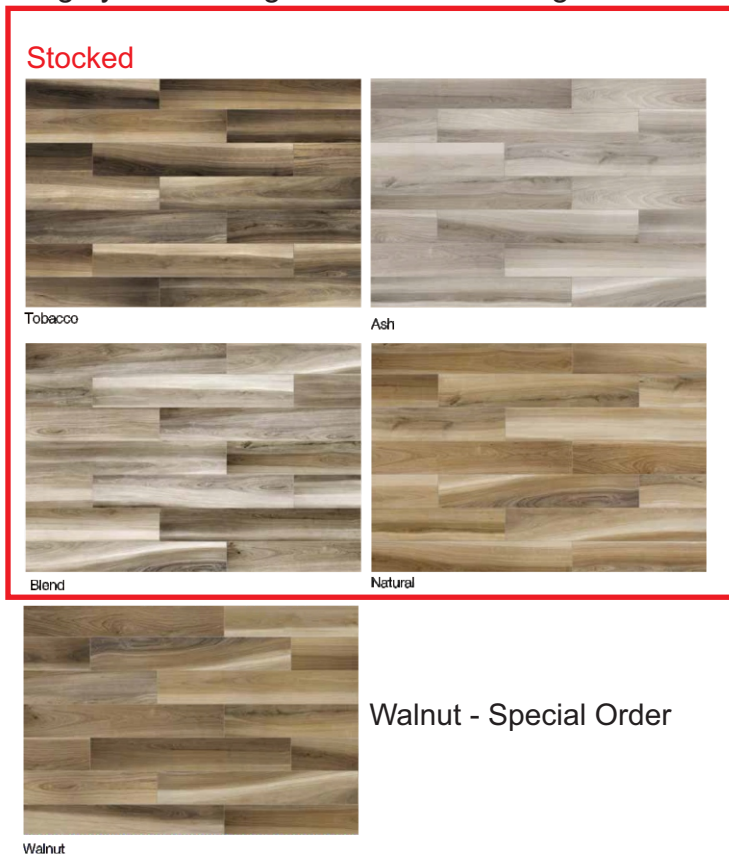

Formats and finishes at a glance

This collection is offered in a variety of sizes including a classic long and wide plank style.

Special Order

8 x 48 in / 19.8 x 120.1 cm Pressed
Matte

Special Order

6 x 36 in / 14.8 x 90.2 cm Pressed
Matte

Stocked

6 x 24 in / 14.8 x 60.1 cm Pressed
Matte

Usage recommendations

Anatolia's recommendations for suitable applications.

Usage Recommendations*

MATTE GLAZED PORCELAIN

APPLICATION		WALL	FLOOR
INTERIOR	RESIDENTIAL	•	ID, IW, IW+, EW, O/G
	COMMERCIAL	•	ID, IW, IW+, EW, O/G
	HEAVY COMMERCIAL	•	
EXTERIOR	RESIDENTIAL / COMMERCIAL	•	ID, IW, IW+, EW, O/G

These recommendations are not defined by ANSI/ISO standards.

DCOF Classifications per ANSI A326.3: (ID): Interior, Dry (IW): Interior, Wet (IW+): Interior, Wet Plus (EW): Exterior, Wet (O/G): Oils/Greases

Factors other than the noted DCOF result must also be taken into consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface texture, effect of structure on the DCOF measurement, number of grout joints, traction-enhancing features, and intended use in addition to the other criteria noted in standard ANSI A326.3