


Series: Muskoka Planks

Stocked



4500-0446-0
 6" x 36" Ash

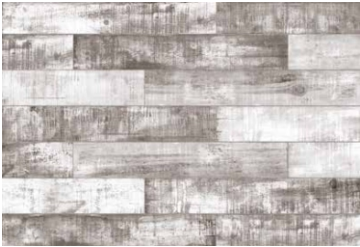

4500-0449-0
 6" x 36" Smoke



4500-0448-0
 6" x 36" Saddle



4500-0447-0
 6" x 36" Charred



Color Shown: Saddle

Stocked-Single Plank Visual



Ash 4500-0446-0
 6 x 36 in
 Pressed Matte



Smoke 4500-0449-0
 6 x 36 in
 Pressed Matte



Saddle 4500-0448-0
 6 x 36 in
 Pressed Matte












Charred 4500-0447-0
 6 x 36 in
 Pressed Matte

Series: Muskoka Planks

Technical information

Tile collection performance based on industry standards.

Technical Information

| | | | |
|---|---------------------|------------------------------------|--|
|  | WATER ABSORPTION | ANSI / ISO - (%) | < 0.5% |
|  | ABRASION RESISTANCE | ANSI / ISO | CLASS 4 |
|  | SCRATCH HARDNESS | ANSI / ISO - (Mohs) | 7 |
|  | BREAKING STRENGTH | ANSI - (lbf) ISO - (N) | ≥300 ≥1300 |
|  | SHADE VARIATION | | V3 |
|  | SLIP RESISTANCE | ANSI - DCOF (WET) ISO - R VALUE | MATTE ≥0.55 (ID, IW, IW+, EW , O/G) MATTE R 11 |
|  | CHEMICAL RESISTANCE | ANSI / ISO | CLASS A |
|  | STAIN RESISTANCE | ANSI ISO | CLASS A CLASS 5 |
|  | FROST RESISTANCE | ANSI / ISO | PASS |

Test values are based on ANSI / ISO standards according to: ANSI A137.1 - Porcelain tile P1 Class, ISO 13006 - G - Bia Group, En 14411 - G - Bia Group. Variances in test values can occur in different production lots.

Usage recommendations

Our recommendations for suitable applications.

Usage Recommendations*

MATTE GLAZED PORCELAIN

| APPLICATION | | WALL | FLOOR |
|-------------|--------------------------|------|-----------------------|
| INTERIOR | RESIDENTIAL | • | ID, IW, IW+, EW , O/G |
| | COMMERCIAL | • | ID, IW, IW+, EW , O/G |
| | HEAVY COMMERCIAL | • | |
| EXTERIOR | RESIDENTIAL / COMMERCIAL | • | ID, IW, IW+, EW , O/G |

These recommendations are not defined by ANSI/ISO standards.

DCOF Classifications per ANSI A326.3: (ID): Interior, Dry (IW): Interior, Wet (IW+): Interior, Wet Plus (EW): Exterior, Wet (O/G): Oils/Greases

Factors other than the noted DCOF result must also be taken into consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface texture, effect of structure on the DCOF measurement, number of grout joints, traction-enhancing features, and intended use in addition to the other criteria noted in standard ANSI A326.3



Office
 1450 N. Wood Dale
 Wood Dale, IL 60191

630.594.4795

Series: Stocked Muskoka Planks

Usage recommendation

Our recommendations for suitable applications.

| <i>Usage Recommendations*</i> | | GLOSSY GLAZED CERAMIC | | MATTE GLAZED CERAMIC | |
|-------------------------------|--------------------------|-----------------------|-------|----------------------|-------|
| APPLICATION | | WALL | FLOOR | WALL | FLOOR |
| INTERIOR | RESIDENTIAL | • | | • | |
| | COMMERCIAL | • | | • | |
| | HEAVY COMMERCIAL | | | | |
| EXTERIOR | RESIDENTIAL / COMMERCIAL | | | | |

* These recommendations are not defined by ANSI/ISO standards.

Packaging information

Key logistical details including item codes and product specifications.

| <i>Muskoka Product & Packaging Information</i> | | | | | | | | | | | | | | |
|--|-------------------|-----------|---------------|-------------------|------------------|-----------------|---------|---------|---------|----------|------|----------|-----------|----|
| | ACTUAL DIMENSIONS | THICKNESS | ASH ITEM CODE | CHARRED ITEM CODE | SADDLE ITEM CODE | SMOKE ITEM CODE | LBS BOX | KGS BOX | PCS BOX | SOFT BOX | | BXS SKID | SOFT SKID | |
| 6 x 36 in / 15 x 90 cm MATTE PRESSED GLAZED PORCELAIN TILE | 150 x 900 mm | 9.4 mm | 4500-0446-0 | 4500-0447-0 | 4500-0448-0 | 4500-0449-0 | 46.63 | 21.15 | 7 | 10.23 | 0.95 | 60 | 613.8 | 57 |



Office
1450 N. Wood Dale
Wood Dale, IL 60191

630.594.4795

Series: Stocked Muskoka Planks



6 x 36 in / 15 x 90 cm Muskoka Charred Matte Pressed Glazed Porcelain Tile