



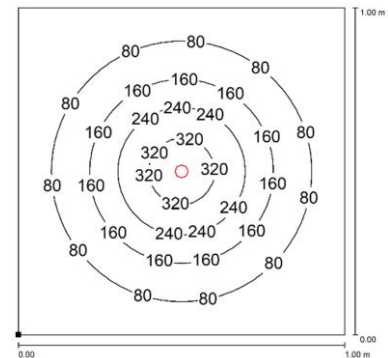

**PRODUCT FEATURES**

<b>Power usage</b>	3 W
<b>Power supply</b>	24 Vdc with LED Driver
<b>Light source</b>	LED
<b>Electrical connection</b>	Cable 1.5m (5ft)
<b>Color temperature</b>	5000K, CRI 80
<b>Luminous flux</b>	160 lm
<b>Efficiency</b>	53 lm/W
<b>Light beam angle</b>	25°
<b>Housing</b>	Anodized aluminum
<b>Front protection</b>	Tempered glass
<b>Protection index</b>	IP65
<b>Impact resistance</b>	IK06
<b>Operating temperature</b>	-20°C to + 45°C (-04°F to +113°F)
<b>Weight</b>	1,20 kg (2,65 lb)
<b>Agency approvals</b>	CE, RoHS
<b>Mounting</b>	CLAMPO4, B02, SCREW

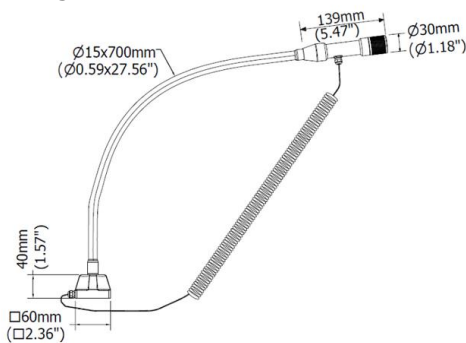

**NOTE:** Installation Height: 1m