

The HD-Series



| | | HD 7/122 TS | | HD 10/122 TS | |
|--|----------------|--------------------|-----|-------------------|-----|
| Technical specifications | | | | | |
| Operating pressure adjustable | bar / MPa | 30-120 / 3-12 | | 30-120 / 3-12 | |
| Max. admissible overpressure | bar / MPa | 135 / 13.5 | | 135 / 13.5 | |
| Connected load | V / ~ / Hz / A | 230 / 1 / 50 / 7.5 | | 230 / 1 / 50 / 11 | |
| Motor speed | Rpm | 1400 | | 2800 | |
| Water output | l/min l/h | 7 | 420 | 10 | 600 |
| Power intake / Power output | kW kW | 1.6 | 1.0 | 2.5 | 1.8 |
| Power supply cable | m | 5 | | 5 | |
| Dimensions L x W x H | mm | 440 / 200 / 330 | | 440 / 200 / 330 | |
| Weight | kg | 22 | | 23 | |
| Cleaning Agent Intake | | - | | - | |
| Equipment | | | | | |
| Hose drum | | - | | - | |
| Steel braided high-pressure hose | m | 10 | | 10 | |
| Trigger gun with safety catch | Model | M2000 | | M2000 | |
| Dirtkiller lance | Nozzle size | ● 028 | | ● 042 | |
| Stainless steel lance with flat jet nozzle | Nozzle size | ● M20028 | | ● M20042 | |
| Ord.no. | | 417321 | | 417331 | |

Practical carrying handle
Portable and space-saving compact design


Total-stop system
Auto-shutdown feature improves seal life-span and reduces power consumption

Pressure regulation
Fully adjustable control allows operating pressures to be set to suit any task

4-pole electrical motor (1.400 Rpm)
Heavy duty induction motors offer quiet operating sound levels and provide maximum life expectancy (HD 7/122 TS)



Figures: HD 7/122 TS

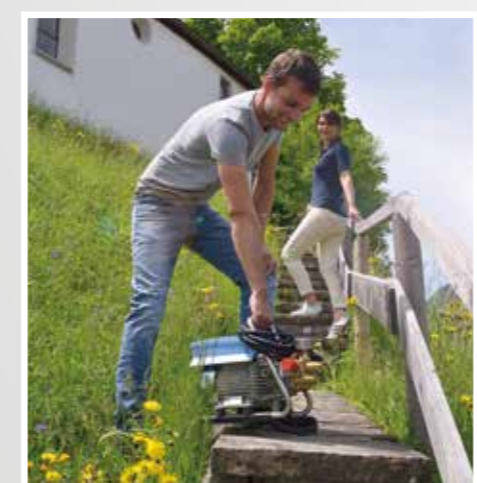

EVEN BETTER NOW!

THE TOTAL-STOP SYSTEM

Closing the safety trigger gun switches off the motor of the high-pressure cleaner immediately. The non-TS versions are still available.

- Relief of the high-pressure pump
- Energy saving
- Increase of the service life

For detailed technical information, see page 74

The HD-Series




Practical carrying handle
Portable and space-saving compact design


4-pole electrical motor (1.400 Rpm)
Heavy duty induction motors offer quiet operating sound levels and provide maximum life expectancy

Pressure regulation
Fully adjustable control allows operating pressures to be set to suit any task

Cleaning Agent Intake
Injector system for dispensing of cleaning agents

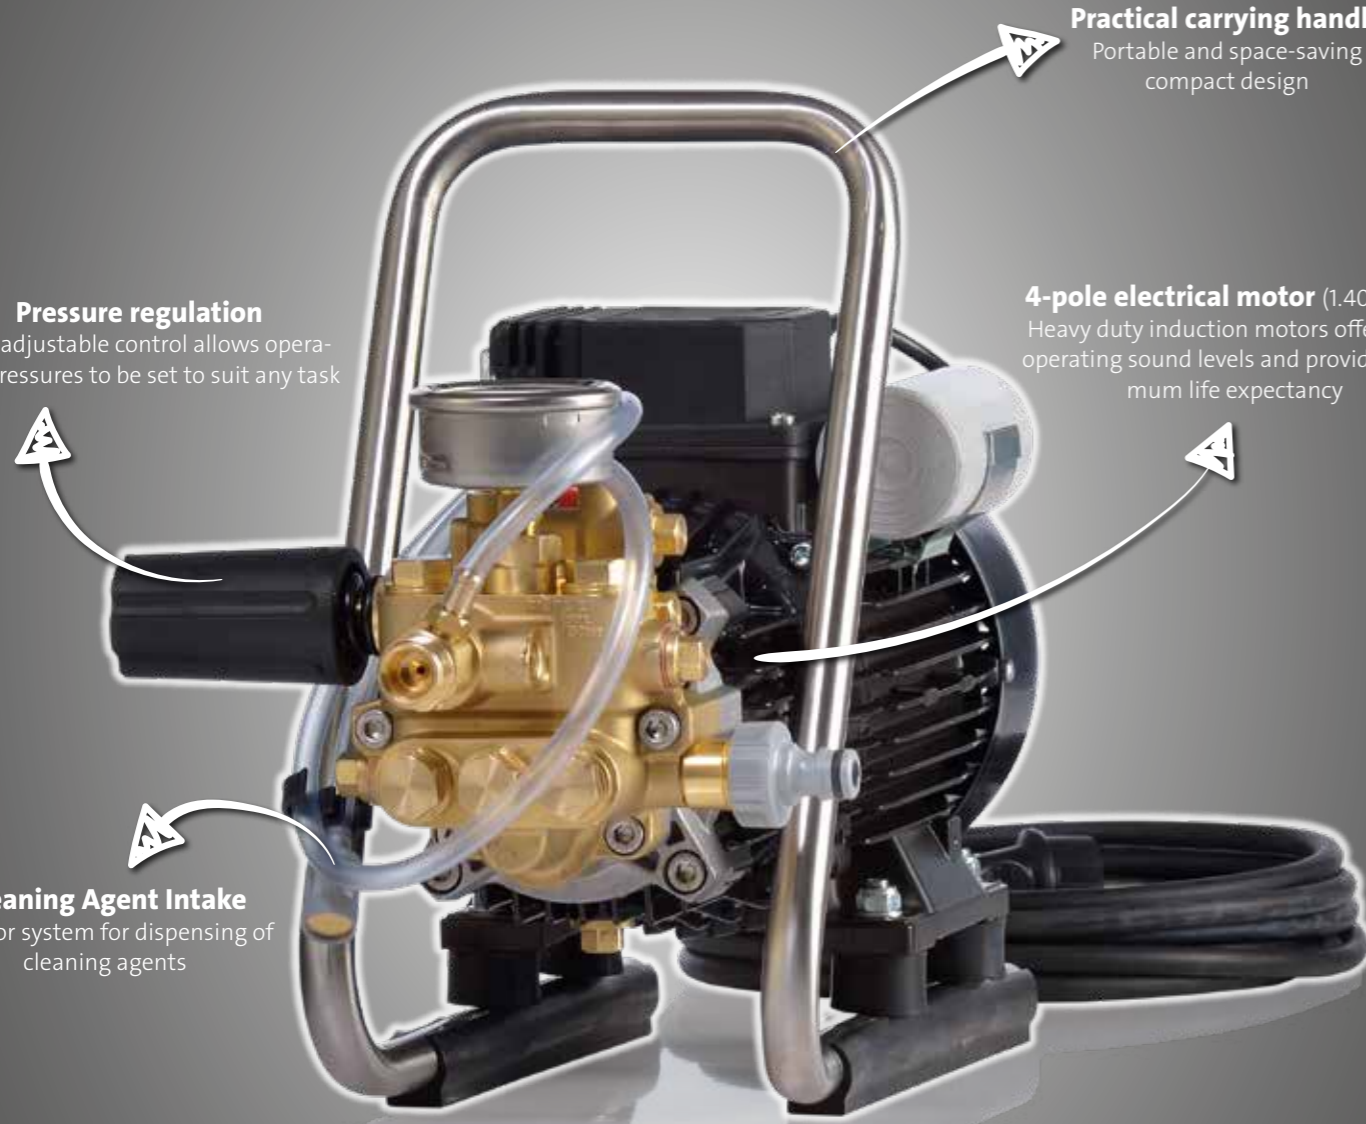

Figures: HD 9/80

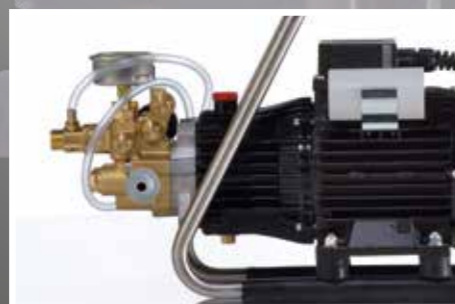

| | | HD 9/80 | | HD 12/130 | |
|--|----------------|--------------------|-----|---------------------|-----|
| Technical specifications | | | | | |
| Operating pressure adjustable | bar / MPa | 30-80 / 3-8 | | 30-130 / 3-13 | |
| Max. admissible overpressure | bar / MPa | 90 / 9 | | 145 / 14.5 | |
| Connected load | V / ~ / Hz / A | 230 / 1 / 50 / 7.5 | | 230 / 1 / 50 / 13.5 | |
| Motor speed | Rpm | 1400 | | 1400 | |
| Water output | l/min l/h | 9 | 540 | 11 | 660 |
| Power intake / Power output | kW kW | 1.6 | 1.0 | 2.9 | 2.2 |
| Power supply cable | m | 5 | | 5 | |
| Dimensions L x W x H | mm | 470 / 230 / 320 | | 500 / 240 / 320 | |
| Weight | kg | 24 | | 30 | |
| Cleaning Agent Intake | | ● | | ● | |
| Equipment | | | | | |
| Hose drum | | - | | - | |
| Steel braided high-pressure hose | m | 10 | | 10 | |
| Trigger gun with safety catch | Model | M2000 | | M2000 | |
| Stainless steel lance with regulating nozzle | Nozzle size | - | | ● M20042 | |
| Vario-Jet lance | Nozzle size | ● 042 | | - | |
| Ord.no. | | 41171 | | 41168 | |



For detailed technical information, see page 74