


Project:	Catalog# : LCCP02A	Approved by:
Location:	Type:	Date:



LED CANOPY LIGHT

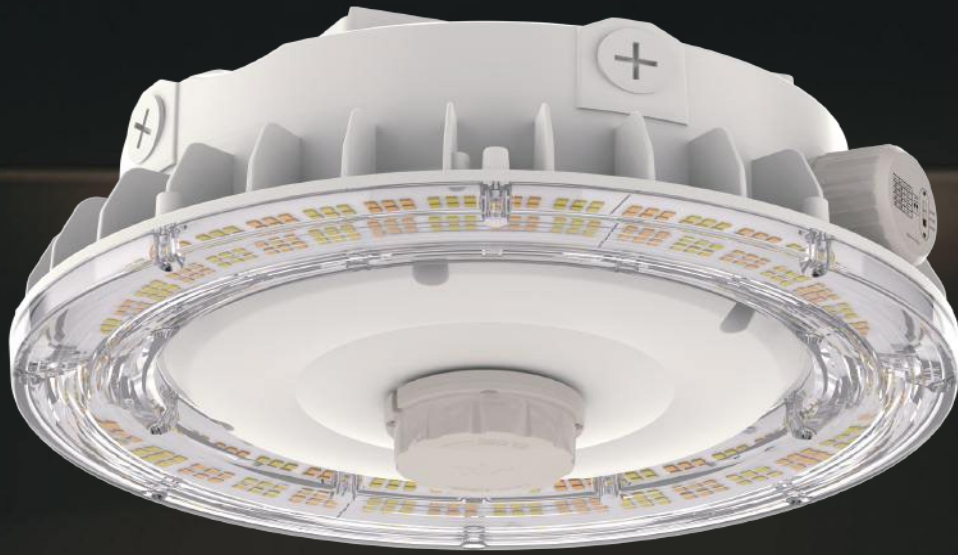

Project:	Catalog# : LCCP02A	Approved by:
Location:	Type:	Date:

1. ETL, DLCs.1 Premium listed
2. 120-277Vac/120-347Vac optional
3. High efficacy up to 135LM/W
4. CCT and wattage tunable available
5. Microwave motion, photocell sensor/
Emergency battery backup optional
6. Unique design, strong extruded lamp body
7. Lifespan: >50,000Hrs
8. 5 years warranty



MODEL	WATT	VOLTAGE	5000K EFFICACY	5000K LUMENS	REPLACE HID	AVAILABLE CCT
LCCP02A-40-50K-LV-D-V40	40W	120-277V	135LPW	5,400Lm	100-150W	3000K/4000K/5000K
LCCP02A-40MW-50KMC-MV-D-V40	45W/35W 30W/25W Tunable	120-347V	135LPW	6,075Lm / 4,725Lm 4,050Lm / 3,375Lm	100-150W	3000K/4000K 5000K Tunable
LCCP02A-75-50K-LV-D-V40	75W	120-277V	135LPW	10,125Lm	250-320W	3000K/4000K/5000K
LCCP02A-75MW-50KMC-LV-D-V40	75W/60W 50W/40W Tunable	120-277V	135LPW	10,125Lm / 8,100Lm 6,750Lm / 5,400Lm	100-320W	3000K/4000K 5000K Tunable
LCCP02A-75MW-50KMC-MV-D-V40	75W/65W 55W/45W Tunable	120-347V	135LPW	10,125Lm / 8,775Lm 7,425Lm / 6,075Lm	100-320W	3000K/4000K 5000K Tunable

Electrical Data

Input Voltage	120-277Vac /120-347V
Power Factor	0.92
Power Frequency	50/60Hz
Power Efficiency	>93%
Total Harmonic Distortion	<15%
Dimming	0-10V
Driver	Kerham
Surge Protection	L-N:4KV, L/N-PE: 6KV

Optical Data

Efficiency	135 LM/W
LED	3030
CCT	2700-6500K
CRI	>70
Beam Angle	135°
Additional function	CCT & Wattage Tunable; SW EMBB; Pluggable Microwave Motion Sensor

Project:	Catalog# : LCCP02A	Approved by:
Location:	Type:	Date:

High Quality Die-casting Aluminum Shell

Lens
Clear and Milky lens



Sensor
Multiple Pluggable Microwave
Motion Sensor Optional (Zhaaa, AUX)


Power Cord



SW Emergency
Battery Back Up



Mounting Plate
Suitable for J-BOX mounting, and easy
for installation, also support pendant
mounting, wires coming out from
the back for easier wire connections.

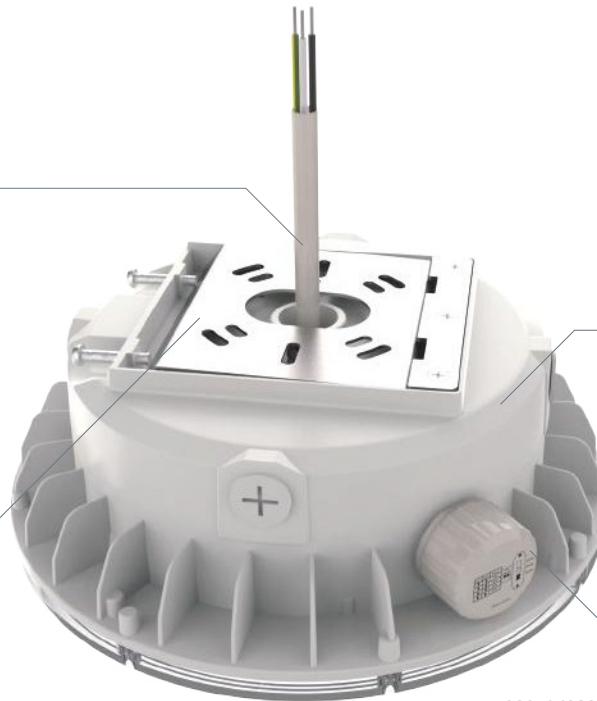


Wattage & CCT Tunable Controller





(NO WIRING NEEDED)



PHOTOMETRICS DIAGRAMS

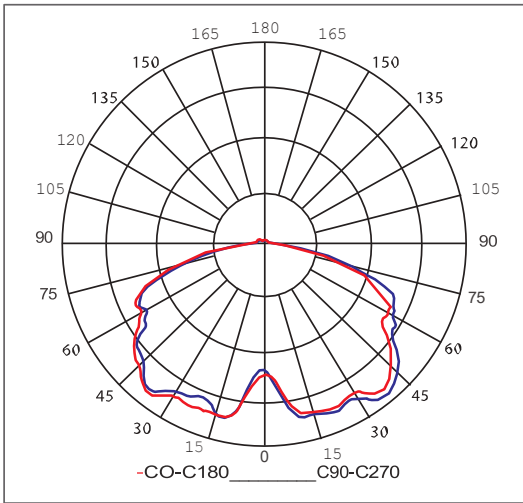

DIMENSIONS INCH (mm)

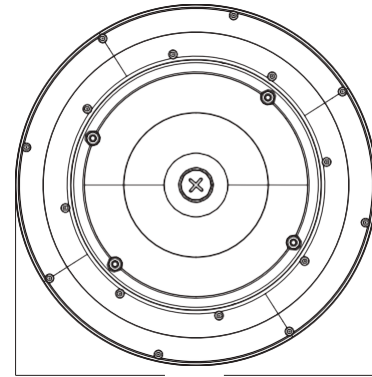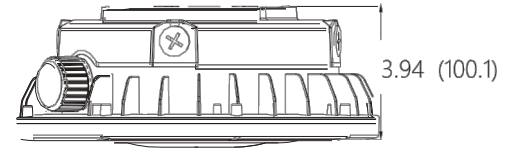

10.24 (260)

PARKING INFORMATION

MODEL	INNER BOX INCH (MM) L*W*H	MASTER CARTON (mm & INCH) L*W*H	PCS/ CTN	NET WEIGHT (Kgs & Lbs)	GROSS WEIGHT (Kgs & Lbs)	20 GP PCS	40HQ PCS	45HQ PCS
LCCP02A-40	/	280*280*160 10.02*10.02*5.31	1	9.8 / 21.61	11 / 24.25	2,646	6,425	8,125
LCCP02A-60	/	280*280*160 10.02*10.02*5.31	1	9.8 / 21.61	11 / 24.25	2,646	6,425	8,125
LCCP02A-75	/	280*280*160 10.02*10.02*5.31	1	9.8 / 21.61	11 / 24.25	2,646	6,425	8,125

MOTION SENSOR INSTALLATION STEPS



1. Loosen the two screws and take out the plate.



2. Install the plate on the ceiling.



2. Hanging the fixture on one of the installation screws.



4. Make the wires connection and tighten the screws.



5. Slide the fixture on the plate.



6. Tighten the two screws to lock the fixture on the plate.