


BWS Waterproof Platform Scale

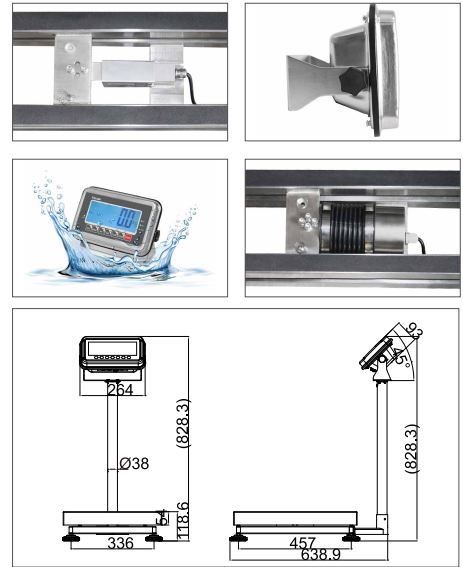

Features

Platform: weighing plate stainless steel, stainless steel base, silicone-coated aluminum load cell (IP65) or stainless steel load cell (IP67)

Pole version or wall mount bracket version selectable, when with pole, display angle can be adjusted

Capacity from 30kg to 300kg, external resolution up to 1/6,000

Full function: unit change, accumulation, animal weighing, Gross/Net shift.

Technical Data

Display: LCD display, digit height 52 mm, with white color LED backlight.

Power: AC adapter (100~240VAC/12V500mA), rechargeable battery (lead acid 6V/4Ah), operation time 70 hours (without backlight)

Operation temperature: -10 °C/40 °C

Accessories

- RS-232 cable for PC
- RS-232 cable for printer
- Mini printer
- Label printer
- Bluetooth 5.0 data transfer to PC or tablets,
- Analogue output (4~20mA)
- 3 color light tower

Standard



Factory Option



Model	Weighing Capacity [Max]kg	Readability [d]g	Verification value [e]g	Platform material	Pan size(mm)	Pole height(mm)
BWS-3236-15K	15	2	-	SST	320x360	230
BWS-3236-30K	30	5	-	SST	320x360	230
BWS-3236-60K	60	10	-	SST	320x360	230
BWS-4050-30K	30	5	-	SST	400x500	660
BWS-4050-60K	60	10	-	SST	400x500	660
BWS-4050-150K	150	20	-	SST	400x500	660
BWS-6060-60K	60	10	-	SST	600x600	660
BWS-6060-150K	150	20	-	SST	600x600	660
BWS-6060-300K	300	50	-	SST	600x600	660
BWS-3236-15K-M	15	5	5	SST	320x360	230
BWS-3236-30K-M	30	10	10	SST	320x360	230
BWS-3236-60K-M	60	20	20	SST	320x360	230
BWS-4050-30K-M	30	10	10	SST	400x500	660
BWS-4050-60K-M	60	20	20	SST	400x500	660
BWS-4050-150K-M	150	50	50	SST	400x500	660
BWS-6060-60K-M	60	20	20	SST	600x600	660
BWS-6060-150K-M	150	50	50	SST	600x600	660
BWS-6060-300K-M	300	100	100	SST	600x600	660