

## Product Description

This 120/240VAC Module allows the user to turn On/Off AC loads up to 30A with an applicable SCS controller. Base unit comes as the hardwire option; available prewired with either a 120VAC 15A 15-5 or 240VAC 30A L14-30 cordset. Cord grip cable diameter range: 0.35"-0.63"

## Terminal Layout

There are 8 screw terminals in the SAC-302, with maximum capacity of 30A.

### L1/L2 IN: "Hot / Live" Conductor From Power Source

- Connect the hot/live wire from the power source to these terminals. For 120V use (L1 IN) only and for 240V use (L1 & L2 IN).

### L1/L2 OUT: "Hot / Live" Conductor To Load


- Connect the hot/live wire to the load to these terminals. For 120V Use (L1 OUT) only and for 240V use (L1 & L2 OUT).

### N/N: Neutral Conductor

- Connect one neutral (N) wire per terminal for source and load.

### G/G: Ground Conductor

- Connect one ground (G) wire per terminal for source and load.

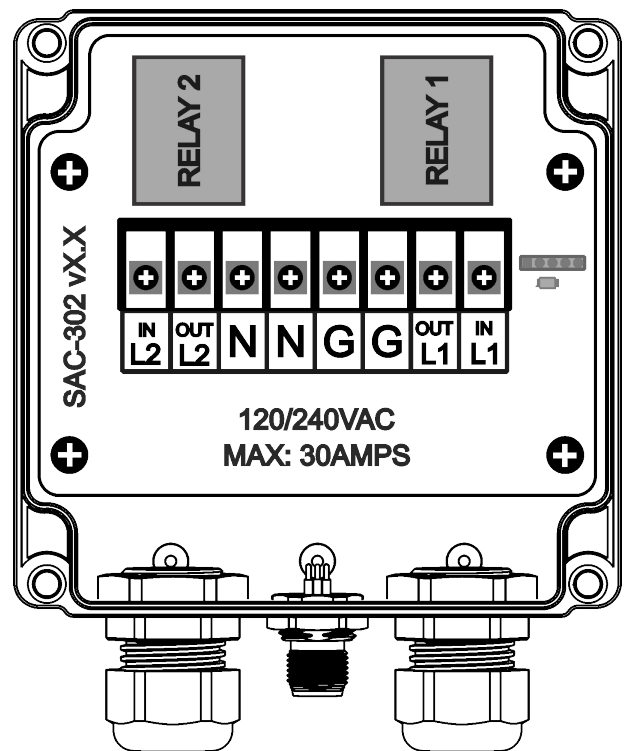

**WARNING: Use industry standards and best practices when connecting to module. Make sure all power is disconnected from entire system before performing any work on system.**

## **Module Selections:**

- 120/240VAC Hard Wire - **SAC-302HW**
- 120VAC 15A Prewired with 5-15 Ends 10' Cable - **SAC-302SA-10**
- 120VAC 15A Prewired with 5-15 Ends 25' Cable - **SAC-302SA-25**
- 240VAC 30A Prewired with L14-30 Ends 10' Cable - **SAC-302LN-10**
- 240VAC 30A Prewired with L14-30 Ends 25' Cable - **SAC-302LN-25**

**Simplified Control Solutions, LLC  
Indianapolis, IN 46218**

**Visit our website at: [www.SimConSol.com](http://www.SimConSol.com)  
Email our technical support at: [Support@SimConSol.com](mailto:Support@SimConSol.com)**