

## Label Printing Scale

# CL3000 series




▶ CL3000-P (Pole Model)


The all new CL3000 Label Printing Scale.

Ideal for use in any type market, from grocery stores, butcher shops, and large supermarkets. Crisp, easy to read displays set the CL3000 Label Printing Scale ahead of the competition.

Fully compatible with the CAS CL Series Label Printing Scales.



Scrolling Message Bar



Optional Linerless Label Printing



Firmware Update via USB Flash Drive



CL Series Compatible



# CL3000 series

## Overview

### CL3000-B (Bench Model)

Rear Display (CL3000-B)

#### Keyboard

72 PLU keys  
35 function keys for CL3000-B



### Pole Display (CL3000-P)

#### Display

Scrolling message bar  
Languages : English, Korean,  
Chinese, and Arabic (optional)  
Numerical digits : 5/6/7/8

#### Printer

100 mm/sec speed  
Label width 58 mm, length maximum 80 mm  
Linerless label printable (optional)



### CL3000-P (Pole Model)

#### Aluminum Body

Durable aluminum body secures stable weighing performance.


#### Keyboard

72 PLU keys  
36 function keys for CL3000-P



## Interface

- 1) USB Port for barcode scanner, keyboard, PC
- 2) LAN for weighing network system
- 3) RJ11 for cash drawer
- 4) RS-232C for external printer, PC
- 5) Wireless LAN for Wi-Fi (optional)

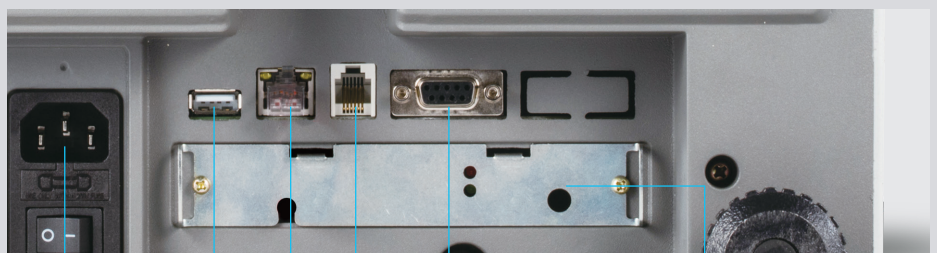

Power

USB Host

LAN

RJ11

RS-232C

Wireless LAN

## More than Just a Display

The CL3000 display supports a scrolling message bar which is suitable for displaying long text messages. The scrolling message can be used for displaying item names or promotional messages.

- Features four different languages, English, Korean, Chinese, Arabic.
- Wider viewing angles to deliver bright, crisp text.



## Pole Display



## Firmware Update & Interface

Firmware updates can be easily installed by connecting RS-232C or USB flash drive.

The most common interface ports are available: USB port, LAN, RJ11, RS-232 and wireless LAN (optional).



## PLU and Programmable Function Keys


72 PLU Keys and 35 (B model) / 36 (P model) Function Keys are available. For convenience, the CL3000 Label Printing Scale can store up to 10,000 PLUs and 1,000 Ingredients (512byte). Quickly transfer PLU data via Wi-Fi or RS-232C for scale to computer or computer to scale.



## Optional Linerless Label Printing

The CL3000 Label Printing Scale provides an option for operators to print with linerless labels which are thermal transfer labels that do not have a liner or backing sheet.

- Easy to change label rolls
- Prints at a quick 100 mm/sec speed.
- Label Width: 58 mm
- Label Length: max 80 mm
- 40 available label templates : 30 standard, 10 custom

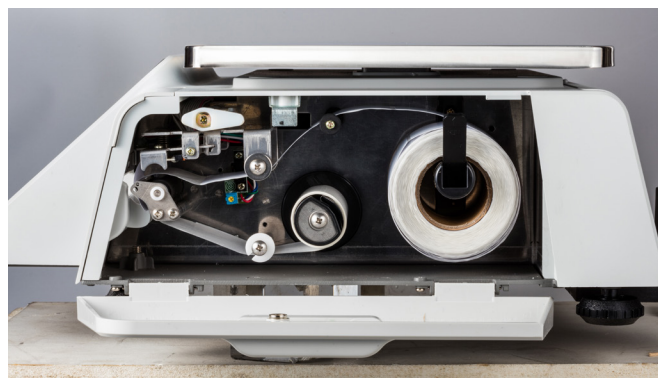

## Feature

- Scrolling message bar
- Aluminum Body Construction
- Detachable Pole Display (CL3000-P)
- Durable printer mechanism
- Firmware update via RS-232C or USB port
- Interface: USB port, LAN, RJ11, RS-232C, optional wireless
- Compatible with CL series

## Option

- Linerless Labels
- Wireless LAN
- CL-Works Pro (PC Management Software)



## Application

- Supermarkets, Grocery Stores, Butcher Shops

## Specification

| MODEL               | CL3000   |           |           |                    |                   |                  |
|---------------------|--|-----------|-----------|--------------------|-------------------|------------------|
| Max. Capacity       | 3/6 kg   | 6/15 kg   | 15/30 kg  | 6/15 lb            | 15/30 lb          | 30/60 lb         |
| Interval            | 1/2 g  | 2/5 g     | 5/10 g    | 0.002/<br>0.005 lb | 0.005/<br>0.01 lb | 0.01/<br>0.02 lb |
| Max. Tare           | -2.999 kg  | -5.998 kg | -9.995 kg | -5.998 lb          | -9.995 lb         | -29.99 lb        |
| A/D Conversion Rate | Approx. 8 times/sec.   |           |           |                    |                   |                  |
| Measurement Type    | Load Cell  |           |           |                    |                   |                  |
| Platter Size        | 380 x 250 mm   |           |           |                    |                   |                  |
| Key                 | B-Type : 72 PLU key, 35 function key / P-Type : 72 PLU key, 36 function key, 144 PLU                           |           |           |                    |                   |                  |
| Display             | LCD (Preset Tare : 5 digit, Weight : 6 digit, Unit Price : 7 digit, Total Price : 8 digit, PLU name: 12 digit) |           |           |                    |                   |                  |
| Printer             | Speed 100 mm/sec   |           |           |                    |                   |                  |
| Printing Resolution | 202 dpi  |           |           |                    |                   |                  |
| Label Size          | Width : 40 mm ~ 58 mm / Length : 30 mm ~ 80 mm   |           |           |                    |                   |                  |
| Barcode Type        | UPC, EAN13, I2OF5, CODE128   |           |           |                    |                   |                  |
| Printer Type        | Direct thermal print   |           |           |                    |                   |                  |
| Operating Temp.     | -10°C ~ 40°C (14°F ~ 104°F)  |           |           |                    |                   |                  |
| Power               | AC 100 ~ 240V 50/60Hz 1.5A   |           |           |                    |                   |                  |

## Dimension

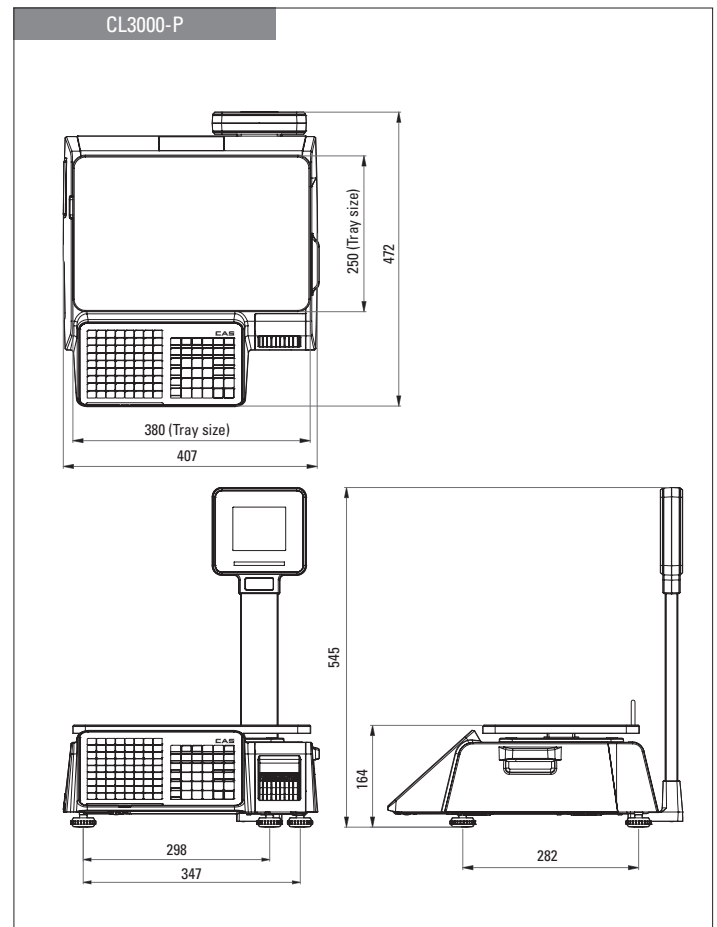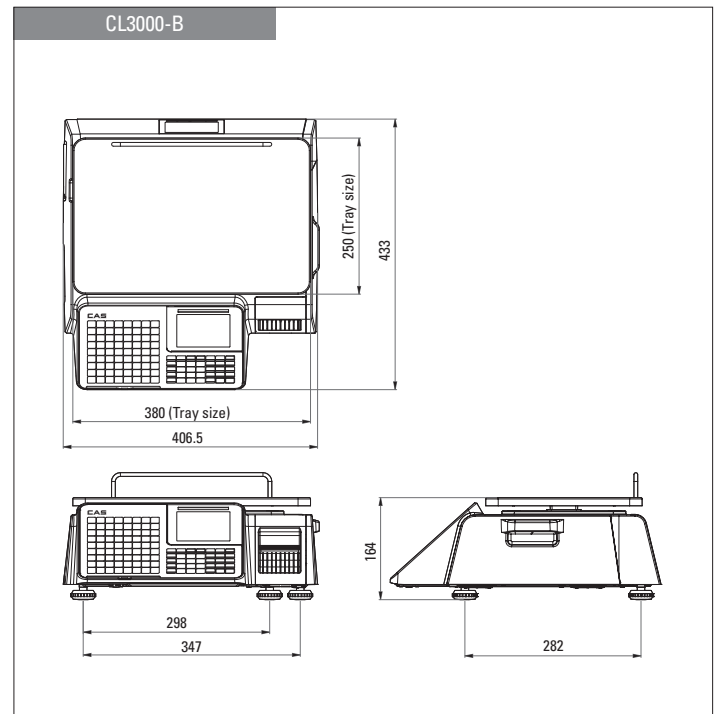

Ver. 2.2 12019102



CAS Global homepage

CAS BLDG., 1315, YANGJAE-DAERO  
GANGDONG-GU, SEOUL, KOREA  
TEL\_82 2 2225 3500 / FAX\_82 2 475 4668

[www.globalcas.com](http://www.globalcas.com)



Specifications are subject to change without notice improvement.

# CAS