


EHB Precision Balance

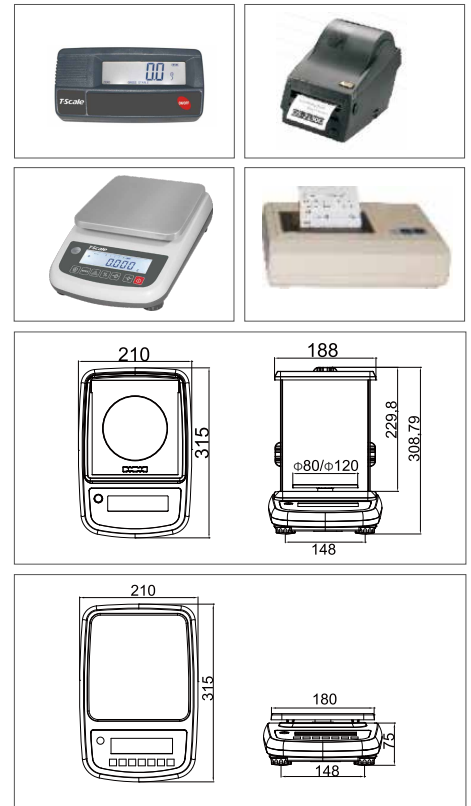

Features

Capacity display: A bar lights up to show how much of the weighing capacity is still available
Draft shield standard on models capacity below 1500g

Function include: simply counting, percentage weighing, weighing unit change, accumulation

Rich interface: standard RS-232 interface, connect to PC or printer, optional Bluetooth and USB interface

When connect with additional remote display kit (for customer), can be "direct sale to public"

Technical Data

Display: LCD display, digit height 16.5 mm, with white color LED backlight

Capacities: 150g~6000g

Pan size: $\Phi 80/\Phi 120/180 \times 190$ mm

Keyboard: 7keys(Membrane keyboard)

Housing: ABS plastic

Operate temp: 15°C~30°C


Gross weight: 3.5kg(With windshield), 2kg(Without windshield)

Power: AC adapter (100~240VAC/12V500mA), rechargeable battery (lead acid 6V/1.2Ah), operation time: 30 hours

Accessories

- Below weighing
- Bluetooth 5.0
- USB interface
- RS-232 cable for PC
- RS-232 cable for printer
- Mini printer
- Label printer
- Remote display kit

Standard



Factory Option



Model	Weighing Capacity [Max]g	Readability [d]g	Verification value [e]g	Minimal load [Min]g	Weighing plate mm
EHB-300	300	0.005	-	0.25	$\Phi 120$
EHB-600	600	0.01	-	0.5	$\Phi 120$
EHB-1500	1500	0.02	-	1	180x190
EHB-3000	3000	0.05	-	2.5	180x190
EHB-6000	6000	0.1	-	5	180x190
EHB-300-M	300	0.005	0.05	1	$\Phi 120$
EHB-600-M	600	0.01	0.1	0.5	$\Phi 120$
EHB-1200-M	1200	0.02	0.2	1	$\Phi 120$
EHB-3000-M	3000	0.05	0.5	2.5	180x190
EHB-6000-M	6000	0.1	1	5	180x190
EHB+-150	150	0.001	-	0.05	$\Phi 80$
EHB+-1500	1500	0.01	-	0.5	$\Phi 120$