



# DISTRIBUTION TRANSFORMERS

OIL IMMERSED up to 6.3 MVA

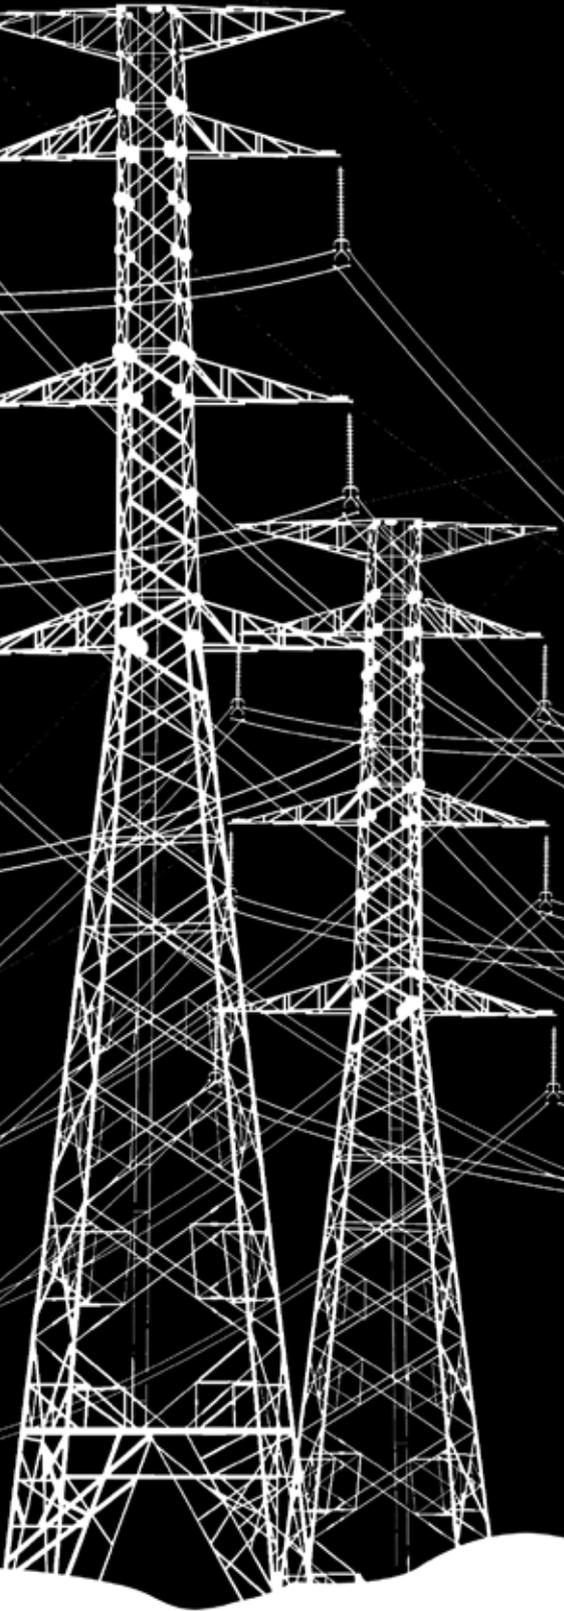

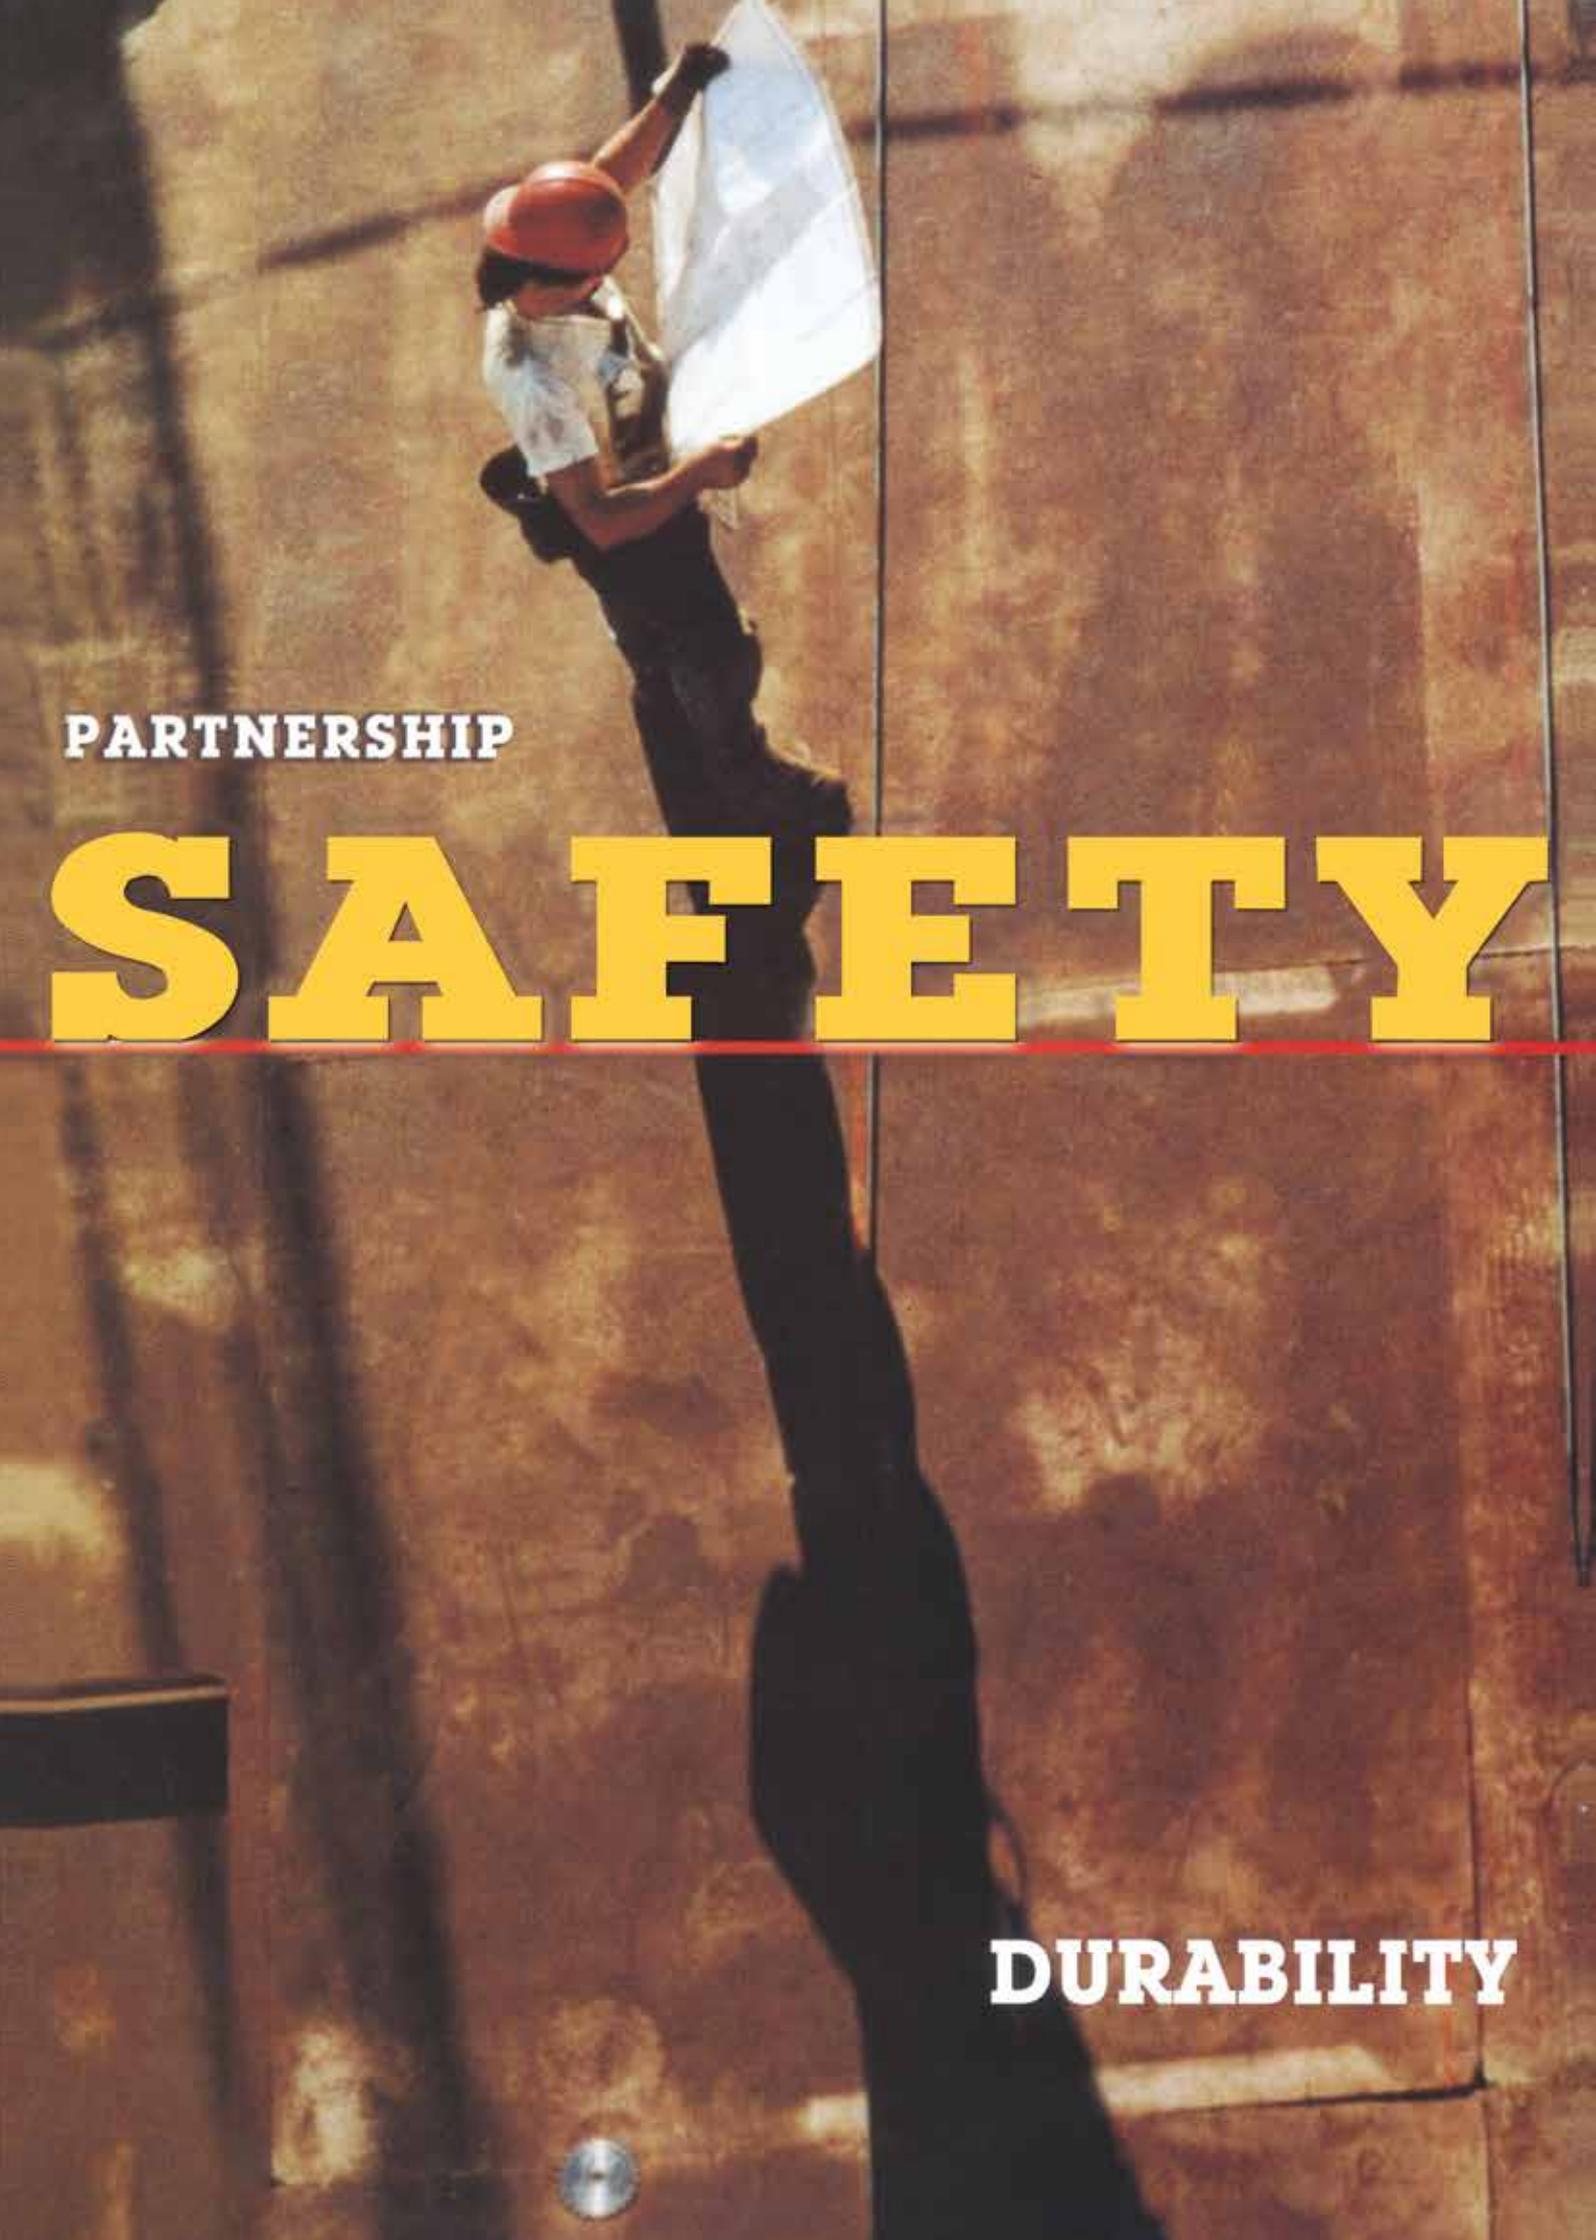

**PARTNERSHIP**

# **SAFETY**

**DURABILITY**

# Contents

<b>1 - General Information</b>	<b>4</b>
<b>2 - Applications</b>	<b>10</b>
<b>3 - Product Portfolio</b>	<b>11</b>
<b>4 - Product Breakdown</b>	<b>12</b>
<b>5 - Transformer Classifications</b>	<b>13</b>
A - Standard Losses Transformers	14
B - High Efficiency Transformers	18
C - Utility Transformers (SEC)	19
1 - Pad Mounted Transformers	19
2 - Pole Mounted Transformers	21
3 - Unit Substations	23
D- Special Transformers	25
1 - PV Transformers	25
2- LV/LV Transformers	26
3 - MV/MV Transformers	27
4 - Dual Voltage Transformers	28
• On Low Voltage	29
• On Medium Voltage	29
5 - Oil Transformrers with On-Load Tap Change (OLTC)	30
6 - Transformers with Hybrid Insulation Winding	31
7 - Non-Mineral Oil Transformers (KNAN)	32
<b>6 - Accessories</b>	<b>33</b>
• Standard Accessories	34
1. Bushing	34
2. Cable Box	38
3. Oil Level Indicator	38
4. Thermometer	38
5. Pressure Relief Valve	38
6. Earthing Terminal on Tank	39
7. Drain Valve	39
8. Tap Changer	39
9. Lifting Lugs	39
• Optional Accessories	40
1. DMCR	40
2. Oil Conservator	40
3. Buchholz Relay	40
4. Air Breather	40
5. Roller	40
6. Winding Temperature Indicator	40
<b>7 - Package and Unit Substations</b>	<b>41</b>
• Design and Structure	41
– Ring Main Unit	42
– Transformer	44
– Low Voltage Panel	45
• Technical Features	46
<b>8 - Service</b>	<b>47</b>
<b>9 - Testing</b>	<b>48</b>
<b>10 - Inquiry Form</b>	<b>49</b>

# 1 – General Information

## A – Standards

The IEC and BS Standards for transformers and their parts are the most widely applied standards in most countries where local electric authorities have either adopted one of these standards or created one that suits the needs, laws and regulations of their country.

The following list of main Standards refers to the most common electrical applications.

The Standards may have been amended, but the relevant amendments are not mentioned here.

### IEC 60076 Power Transformers

#### IEC 60076-1 General

#### IEC 60076-2 Temperature rise for liquid-immersed transformers

#### IEC 60076-3 Insulation levels, dielectric tests and external clearances in air

#### IEC 60076-5 Ability to withstand short circuit

#### IEC 60076-14 Liquid-immersed power transformers using high-temperature insulation materials

#### IEC 60296 Unused mineral insulating oils for transformers and switchgear

#### IEC 60137 Insulated bushings for alternating voltages above 1000 V

#### IEC 60529 Classification of degree of protection provided by enclosures

#### IEC 60354 Loading Guide for Oil-Immersed Transformers


#### IEC 60551 Measurement of transformer and reactor Sound Level

## B – Cooling Code and Insulation Liquid

No transformer is truly an ‘ideal transformer’ as each will incur some losses which gets converted into heat. If this heat is not dissipated properly, the excess temperature in the transformer has the potential to cause serious problems like insulation failure. The transformer requires a cooling system to prevent this from occurring.

- For Oil Immersed Transformers
- ONAN: Oil Natural Air Natural (Liquid with flash point < 300 C)
- ONAF: Oil Natural Air Forced (Liquid with flash point < 300 C)
- KNAN: Oil Natural Air Natural (Liquid with flash point > 300 C)
- KNAF: Oil Natural Air Forced (Liquid with flash point > 300 C)

The ONAN transformers can be operated with normal rating and ONAF with an increased rating of approximately 25%.

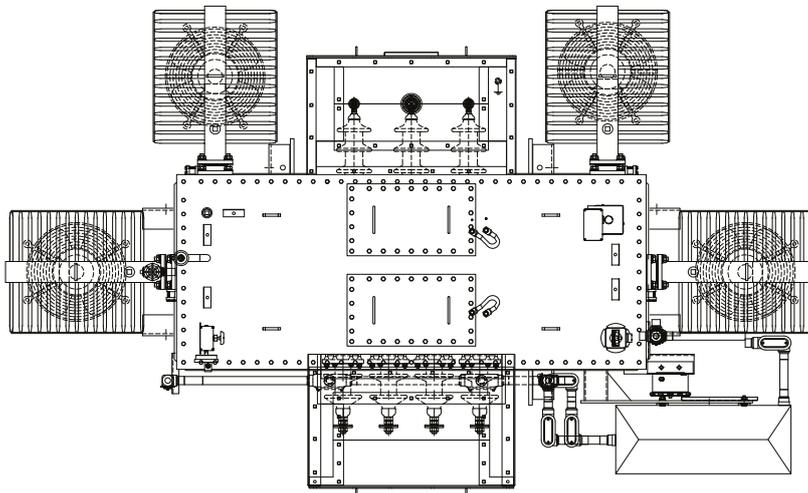

# 1 - General Information

## C - Technical Aspects

### Power Rating and Voltage Levels

A power rating is the rated voltage (multiplied by the phase-factor for three-phase transformers) and the rated line current at center tap when several taps are provided.



Rating is expressed in kVA or MVA.

The rated power of the three-phase transformer is defined by the formula:

$$P = V * I * 1.73$$

“V” is the rated line to line voltage

“I” is the rated line current of the transformer

“1.73” is the numerical value for the square root of 3.

Transformers are usually energized from a network which has a defined voltage level which is the primary (feed) voltage level. Transformers should transform the primary voltage to a new voltage, the secondary voltage level, that is required by the consumer.

Transformers can be designed to operate with two primary voltages (one at a time), therefore, if the network voltage must be changed in the future, the same unit will be used.

Transformers can be designed to generate two secondary voltages simultaneously, thus, outputting two levels for two applications.

The primary and secondary voltages define a Basic Insulation Level (BIL) of 75, 95, 110, 125, 170 and 200kV. The transformer is designed accordingly for electrical withstand of over-voltages.

# 1 – General Information

## Altitude

The transformers are suitable for operation at altitudes of up to 1000m above sea level. Site altitudes above 1000m require the use of special designs and should be mentioned in the order.



## Short Circuit Impedance

The short circuit impedance is the transformer's impedance, usually between 4% and 6% for distribution transformers and higher than 7% for power transformers. The short circuit impedance is the percentage of the primary rated voltage that must be applied at the transformer primary winding when the secondary winding is shorted in order to have the rated currents in the primary and secondary windings. If the short circuit impedance increases, it will result in an unnecessary voltage drop across the power transformer and will limit its ability to deliver power to the secondary-connected equipment transformers working in parallel should have identical short circuit impedance.

## Vector Group

The vector group is the International Electrotechnical Commission (IEC) method of categorizing the high voltage (HV) windings and low voltage (LV) winding configurations of three-phase transformers. The vector group designation indicates the windings configurations and the difference in phase angle between them.

The possible connections are as follows:

- D (d) delta connection
- Y (y) star connection
- Z (z) zigzag connection
- N (n) the neutral exists for connection outside the transformer

The vector group determines the phase displacement between the primary and the secondary winding, and each unit in the vector group refers to 30 degrees displacement. A vector group Dyn11 is delta on primary, star on secondary, with neutral brought out and 330-degree phase displacement.

# 1 - General Information

## Tank Types

The transformer tank is usually a non-rigid structure with corrugated panels, designed to withstand mechanical stresses, absorb oil expansion, and meet the thermal evacuation constraints.

For power rating above 3150kVA, the tank is usually designed with rigid structure, cooling radiators and conservator.



## Magnetic Circuits

The structure of magnetic circuit are:

- Three legs construction
- Step lap stacking

Made from a cold rolled, grain oriented silicon steel strips (CRGO), each strip (0.23, 0.27 or 0.30mm thick) is insulated on both sides by Carlite.



## Permissible Tolerances

Manufacturing tolerances are the deviations between the measured values and the guaranteed values.

Unless otherwise specified in the order, the tolerances are limited to the values specified in IEC 60076-1.

# 1 - General Information

## Frequency

Frequency is the number of occurrences of a repeating event per unit of time. It is also referred to as temporal frequency, which emphasizes the contrast to spatial frequency and angular frequency. The period is the duration of time of one cycle in a repeating event, so the period is the reciprocal of the frequency.

The frequency at which the transformer is designed to operate is 50Hz or 60Hz and is set in accordance with the network frequency.



## Ambient Temperature and Temperature Rise

The normal ambient temperature under which the transformer will operate is defined as the ambient temperature, where the temperature rise expresses the rise of the cooling medium and the winding temperatures when the transformer operates at full load. The maximum values are defined by applied standards.

## Winding Coils

An electromagnetic coil is an electrical conductor such as a wire in the shape of a coil, spiral or helix used in applications where electric currents interact with magnetic fields. Either an electric current is passed through the wire of the coil to generate a magnetic field, or conversely an external time-varying magnetic field through the interior of the coil generates an EMF (voltage) in the conductor.





Both the primary and secondary windings are made of copper or aluminum. The primary voltage is directly wound on the secondary voltage winding, with insulating barriers and cooling channels between the two windings. Secondary voltage coils are rectangular wires or foil conductors. Primary voltage coils are round enamel wires, or rectangular paper insulated wires for high power ratings, or paper insulated round wires.

Adequate channels for oil circulation are integrated in the windings to provide efficient cooling and to limit the hot spot temperature.

## 2 - Applications

The distribution transformer provides the final voltage transformation in the electric power distribution system, stepping down the networks medium voltage to low voltage, the level used by the consumer, and is considered one of the most important links in the distribution network.

Distribution transformers are used in the following applications:

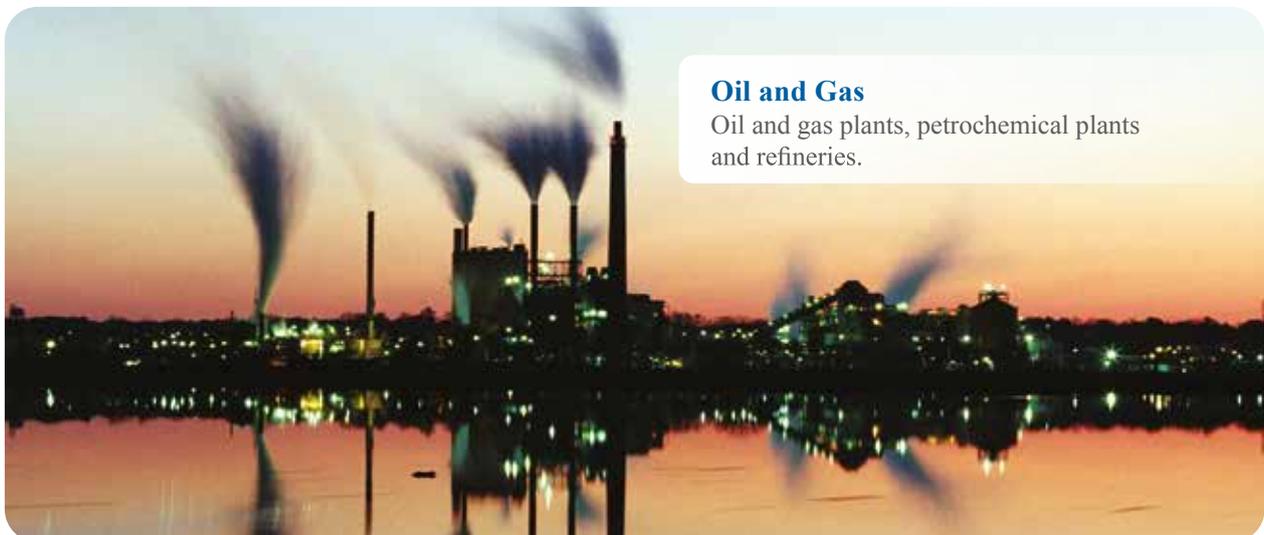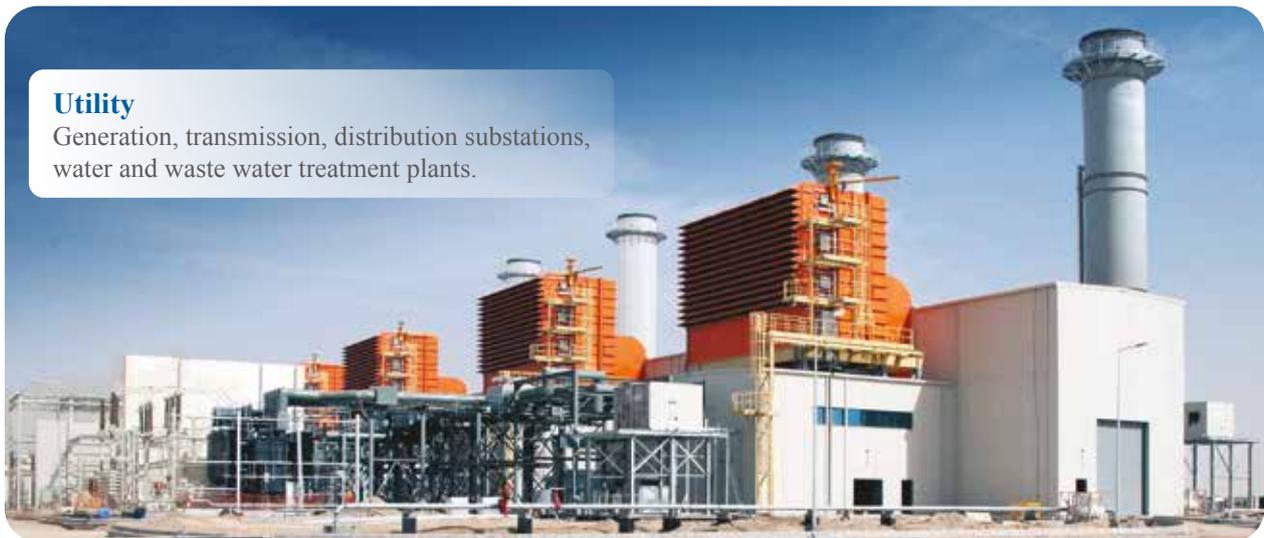

### 3 - Product Portfolio



PV Transformer



Standard Transformer



Package Substation



Pad Mounted Transformer



Pole Mounted Transformer




Unit Substation Transformer



Oil and Gas Power Transformer  
up to 6.3MVA

## 4 - Product Breakdown

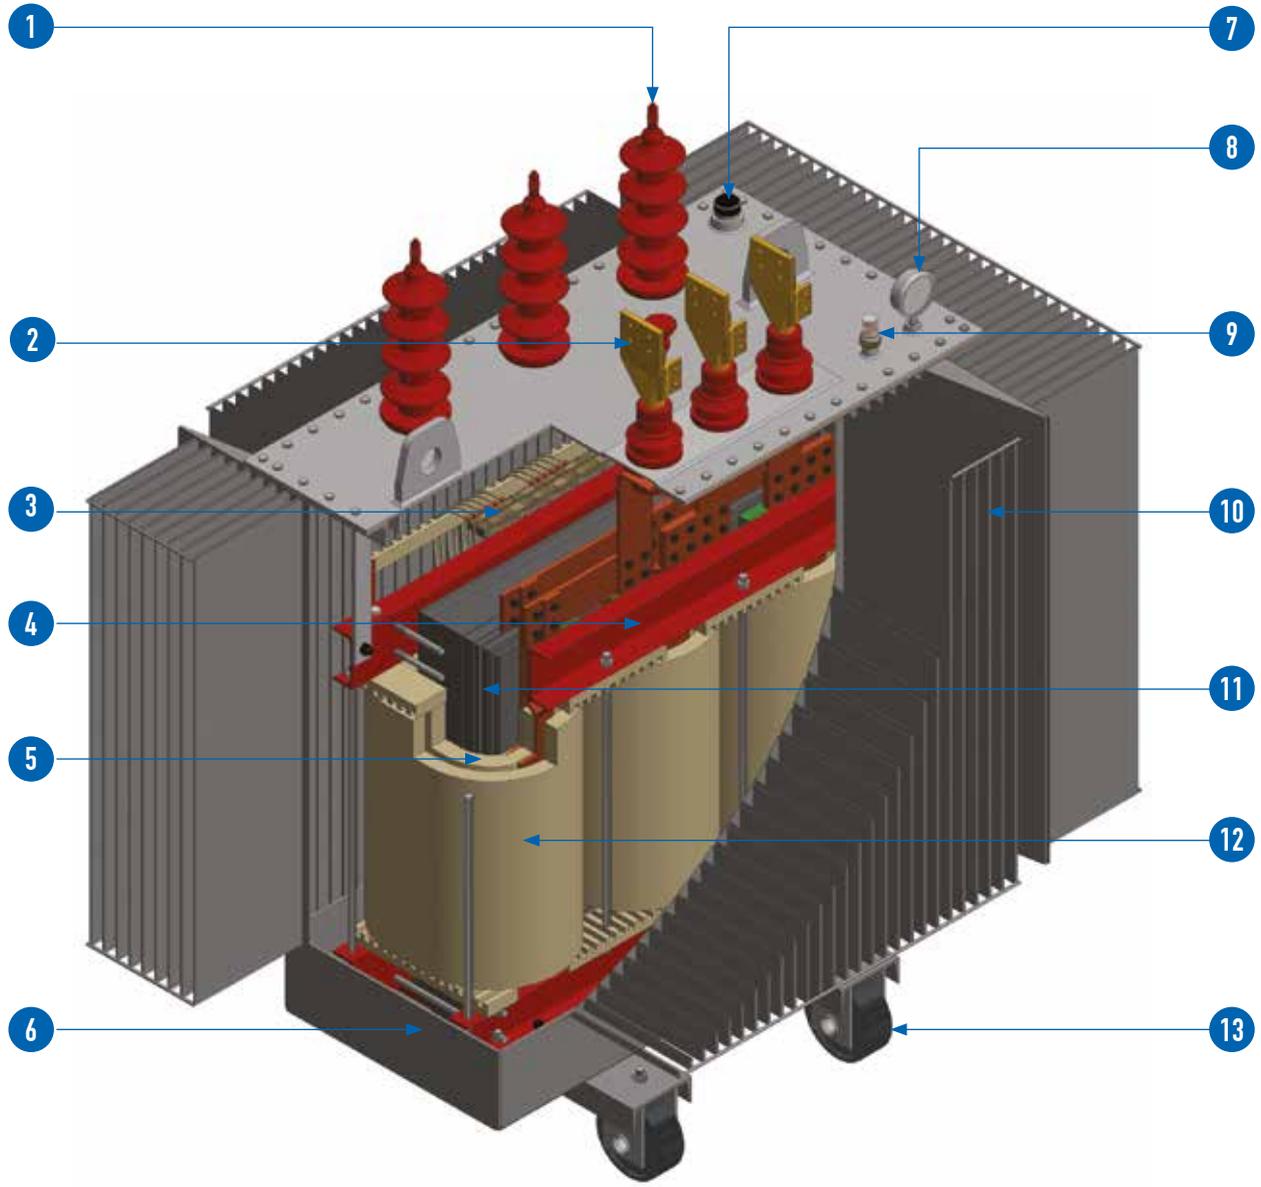

- 1 HV Bushing
- 2 LV Bushing
- 3 No Load Tap Changer
- 4 Core Clamps
- 5 LV Coil
- 6 Transformer Tank

- 7 Pressure Relief Valve
- 8 Top Oil Thermometer
- 9 Oil Level Indicator
- 10 Corrugated Fins
- 11 Core
- 12 HV Coil
- 13 Roller

## 5 – Transformer Classifications

A distribution transformer or service transformer is a transformer that provides the final voltage transformation in the electric power distribution system, stepping down the voltage used in the distribution lines to the level used by the customer.

Whether the transformers are used for infrastructure systems, industry or households, **alfanar** provides the right transformer for every need – from compact distribution transformers to limited power transformers with ratings up to 6300 A.

Transformers can be classified based on many factors like installation or losses which is the most important factor in the transformer.

In any electrical machine, ‘loss’ can be defined as the difference between input power and output power.



## A – Standard Losses Transformers



As per the International Standards and local Authorities requirements , with a Full capability to match IEC, SEC and BS 50708-2-1 Tier 1 , Tier 2 and Tier 3.

Under those values a standard losses transformer is made to fulfil the customer requirements with a competitive cost and high quality.

## Technical Data

<b>Transformer Type</b>	Three Phase, Oil Immersed Distribution Transformers (Indoor or Outdoor Installation)		
<b>Type of Breathing</b>	Hermetically Sealed /Radiator		
<b>Standard</b>	IEC60076		
<b>Rated Frequency</b>	60Hz		
<b>Connection and Vector Group*</b>	Dyn11		
<b>Ambient Temperature*</b>	Ambient=50	Oil=50	Winding=55
<b>Winding</b>	CU or ALU		
<b>Type of Cooling</b>	ONAN		
<b>HV Tapping*</b>	Off-circuit tap changer 5 positions $\pm 2 \times 2.5\%$		



\* Subject to change according to customer requirements.

### Standard Losses Transformer (Aluminium)

Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
100	13.8	0.4	300	2150	4	1050	650	1200	750
160	13.8	0.4	440	2600	4	1100	700	1200	850
200	13.8	0.4	480	2950	4	1200	750	1230	950
250	13.8	0.4	550	3650	4	1200	800	1250	1100
300	13.8	0.4	630	4200	4	1350	850	1300	1150
400	13.8	0.4	750	5000	4	1400	850	1350	1500
500	13.8	0.4	850	6000	5	1450	900	1350	1650
630	13.8	0.4	900	8000	5	1550	950	1400	2100
800	13.8	0.4	1250	9000	5	1600	1050	1550	2500
1000	13.8	0.4	1450	12000	6	1650	1100	1550	2800
1250	13.8	0.4	1700	13000	6	1850	1200	1600	3150
1500	13.8	0.4	1850	16500	6	2000	1350	1600	3700
1600	13.8	0.4	2050	18000	6	2100	1400	1700	4400
2000	13.8	0.4	2800	19500	6	2150	1450	1900	4900
2500	13.8	0.4	3000	25500	6	2250	1450	2150	6200
3150	13.8	0.4	3300	30000	7.5	2350	1800	2400	8000
300	33	0.4	630	4200	4	1450	950	1400	1400
500	33	0.4	850	6000	5	1500	1000	1500	1900
630	33	0.4	900	8000	5	1600	1050	1600	2200
1000	33	0.4	1450	12000	6	1800	1150	1700	3000
1250	33	0.4	1700	13000	6	1900	1300	1800	3800
1500	33	0.4	1850	16500	6	2050	1400	2000	4500
1600	33	0.4	2050	18000	6	2150	1450	2050	4700
2000	33	0.4	2800	19500	6	2200	1500	2200	5600
2500	33	0.4	3000	25500	7	2300	1800	2300	7100

Standard Losses Transformer (Copper)

Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
100	13.8	0.4	300	2150	4	1100	750	1150	750
160	13.8	0.4	440	2600	4	1100	700	1250	900
200	13.8	0.4	480	2950	4	1200	800	1200	1000
250	13.8	0.4	550	3650	4	1200	800	1250	1150
300	13.8	0.4	630	4200	4	1350	850	1250	1200
400	13.8	0.4	750	5000	4	1350	850	1300	1600
500	13.8	0.4	850	6000	5	1400	850	1300	1700
630	13.8	0.4	900	8000	5	1500	950	1350	2200
800	13.8	0.4	1250	9000	5	1600	1050	1550	2500
1000	13.8	0.4	1450	12000	6	1650	1100	1500	2900
1250	13.8	0.4	1700	13000	6	1800	1200	1550	3200
1500	13.8	0.4	1850	16500	6	1900	1300	1600	3750
1600	13.8	0.4	2050	18000	6	2000	1350	1700	4300
2000	13.8	0.4	2800	19500	6	2100	1400	1950	5100
2500	13.8	0.4	3000	25500	6	2200	1500	2050	6550
3150	13.8	0.4	3300	30000	7.5	2350	1800	2350	8100
300	33	0.4	630	4200	4	1400	900	1350	1450
500	33	0.4	850	6000	5	1450	950	1500	1900
630	33	0.4	900	8000	5	1550	1000	1550	2250
1000	33	0.4	1450	12000	6	1750	1150	1600	3100
1250	33	0.4	1700	13000	6	1900	1300	1800	4000
1500	33	0.4	1850	16500	6	2000	1350	1950	4500
1600	33	0.4	2050	18000	6	2100	1400	2000	4800
2000	33	0.4	2800	19500	6	2150	1500	2100	5700
2500	33	0.4	3000	25500	7	2250	1800	2200	7300

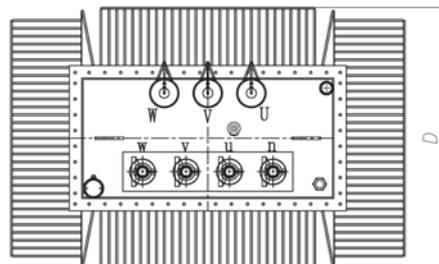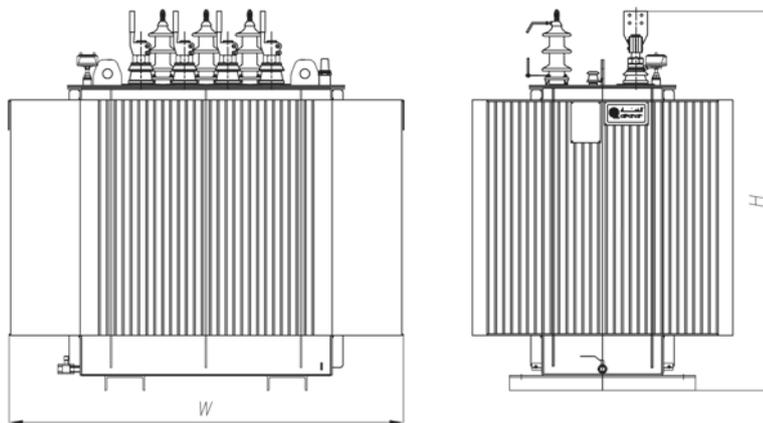

## B – High Efficiency Transformers



**alfanar** High Efficiency Transformers offer the best ratio between initial cost and operating cost for sensitive applications.

Lowering the energy consumption results in reduced operating costs and less harmful emissions for the customer's operations.

### Technical Data

<b>Transformer Type</b>	Three Phase, Oil Immersed Distribution Transformers with losses as per ECO design		
<b>Type of Breathing</b>	Hermetically Sealed /Radiator		
<b>Standard</b>	IEC60076, Losses refer to commission regulation (EU) No 548, Tier 2 ( 1 July 2021)		
<b>Rated Frequency</b>	60Hz		
<b>Connection and Vector Group*</b>	Dyn11		
<b>Ambient Temperature*</b>	Ambient=50	Oil=50	Winding=55
<b>Winding</b>	CU or ALU		
<b>Type of Cooling</b>	ONAN		
<b>HV Tapping*</b>	Off-circuit tap changer 5 positions $\pm 2 \times 2.5 \%$		

\* Subject to change according to customer requirements.

## C - Utility Transformers “SEC”



### 1- Pad Mounted Transformers

**alfanar** three-phase pad-mounted transformers are compact power centers that can be used for all types of applications.

With a proper design selection, they can be located near or inside buildings for greater flexibility and savings, and are designed to withstand environmental hazards.

The transformers are designed to meet or exceed applicable local and international standards such as IEC and BS standards.

All transformers are manufactured and are produced expressly to meet a customer’s exacting specifications.

#### Technical Data


<b>Transformer Type</b>	Three Phase, Oil Immersed Distribution Transformers Pad Mounted			
<b>Type of Breathing</b>	Hermetically Sealed			
<b>Standard</b>	51-SDMS-03 & 04 (ALU) or 51-SDMS-01 & 02 (CU)			
<b>Rated Frequency</b>	60Hz			
<b>Connection and Vector Group</b>	Dyn11			
<b>Ambient Temperature</b>	Ambient=55	Oil=45	Winding=50	
<b>Winding</b>	CU or ALU			
<b>Type of Cooling</b>	ONAN			
<b>HV Tapping</b>	Off-circuit tap changer 5 positions $\pm 2 \times 2.5\%$			

Pad Mounted Transformers SEC (Aluminum)

Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
300	13.8	0.4	520	3200	4	1500	1300	1400	1600
500	13.8	0.4	750	4700	5	1650	1300	1500	2000
1000	13.8	0.4	1100	9000	6	1800	1400	1700	3400
1500	13.8	0.4	1700	14000	6	2000	1600	2000	4300
300	33	0.4	520	3200	4	1600	1400	1500	1800
500	33	0.4	750	4700	5	1700	1400	1600	2400
1000	33	0.4	1100	9000	6	1950	1600	1800	3600
1500	33	0.4	1700	14000	6	2100	1700	2100	4800

Pad Mounted Transformers SEC (Copper)

Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
300	13.8	0.4	520	3200	4	1500	1250	1400	1650
500	13.8	0.4	750	4700	5	1600	1300	1500	2150
1000	13.8	0.4	1100	9000	6	1750	1450	1700	3600
1500	13.8	0.4	1700	14000	6	1950	1600	2000	4500
300	33	0.4	520	3200	4	1450	1400	1500	1850
500	33	0.4	750	4700	5	1650	1400	1600	2450
1000	33	0.4	1100	9000	6	1850	1500	1800	3700
1500	33	0.4	1700	14000	6	2000	1650	2100	5000

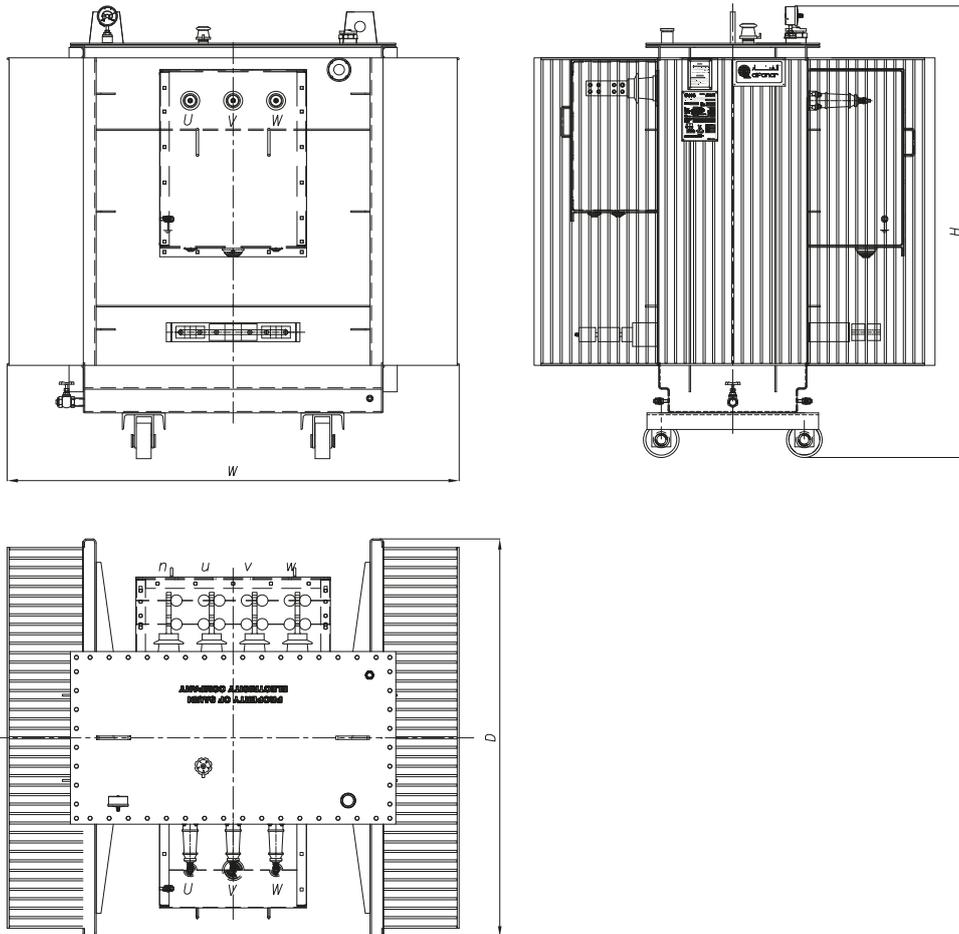

## C - Utility Transformers “SEC”



### 2 - Pole Mounted Transformers

Pole mounted transformers are electric utility distribution transformers that are mounted on an electrical service pole (wood or concrete) and are usually at the level of the overhead cables.

These transformers typically service urban and rural residential and commercial loads. Other uses include light industrial and commercial lighting applications.

#### Technical Data


<b>Transformer Type</b>	Three Phase, Oil Immersed Distribution Transformers Pole Mounted		
<b>Type of Breathing</b>	Hermetically Sealed		
<b>Standard</b>	51-SDMS-03 & 04 (ALU) or 51-SDMS-01 & 02 (CU)		
<b>Rated Frequency</b>	60Hz		
<b>Connection and Vector Group</b>	Dyn11		
<b>Ambient Temperature</b>	Ambient=55	Oil=45	Winding=50
<b>Winding</b>	CU or ALU		
<b>Type of Cooling</b>	ONAN		
<b>HV Tapping</b>	Off-circuit tap changer 5 positions $\pm 2 \times 2.5\%$		

Pole Mounted Transformers SEC (Aluminium)

Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
100	13.8	0.4	250	1500	4	1350	900	1600	650
200	13.8	0.4	380	2200	4	1450	1100	1700	900
300	13.8	0.4	520	3200	4	1450	1100	1700	1250
100	33	0.4	250	1500	4	1350	900	1600	950
200	33	0.4	380	2200	4	1450	1100	1700	1150
300	33	0.4	520	3200	4	1450	1100	1700	1400

Pole Mounted Transformers SEC (Copper)

Rated Power kVA	HV(kV)	LV(kV)	No Load Loss W	Load Loss W	Impedance%	Width mm	Depth mm	Height mm	Weight Kg
100	13.8	0.4	250	1500	4	1350	900	1450	650
200	13.8	0.4	380	2200	4	1450	1100	1700	900
300	13.8	0.4	520	3200	4	1450	1100	1700	1400
100	33	0.4	250	1500	4	1350	900	1450	950
200	33	0.4	380	2200	4	1450	1100	1700	1150
300	33	0.4	520	3200	4	1450	1100	1700	1600

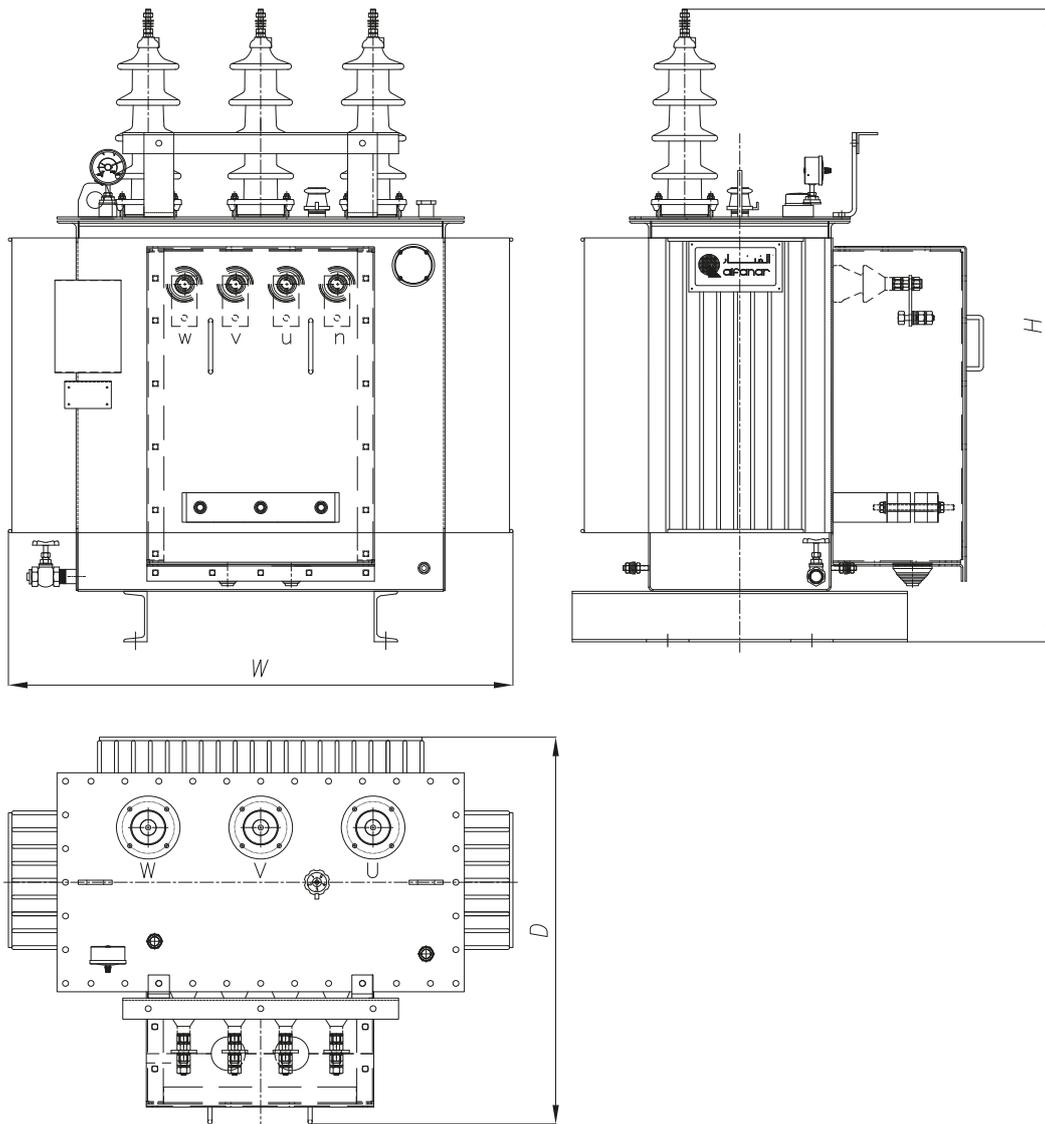

## C - Utility Transformers “SEC”



### 3 - Unit Substations

The unit substation transformer is designed for commercial and industrial applications to convert distribution voltages to utilization voltages. They are constructed to interconnect easily with both primary and secondary switchgear.

Unit substations follow the system concept of locating transformers as close as practical to areas of load concentration at utilization voltages to minimize the lengths of secondary distribution cables and buses.

Unit Substations are a compact solution for multiple functions, and can be used in either indoor or outdoor applications.




General		
Related Specification	56-SDMS-07, 56-SDMS-09 56-SDMS-01, 56-SDMS-03	USS With aluminum transformer & aluminum busbars LVDP USS With copper transformer & copper busbars LVDP
Ambient Temperature		Up to 55 C
Outdoor color		RAL 7035 or RAL 7033
Location of Operation		Outdoor
Degree of Protection		Up to IP 54
Electrical Characteristics		
Nominal Unit S/S Rating	kVA	300, 500, 1000, 1500, 2000 kVA
MV Rating	kV	13.8 kV, 33 kV, 34.5-33kV (dual)
LV Rating	V	400V, 230V, 400-230V (dual)
Rated Frequency	Hz	60
Transformer		
Rated Transformer	kVA	Up to 2000
Vector Group		Dyn11
Low Voltage Board		
Main Incomer	A	Up to 4000 A
Metering Devices		Digital
Busbar		Tin Plated Aluminum / Copper Busbar
LV Panel Distribution Units		Branch MCCB/ Main Breaker / Both

Max Dimensions (Aluminium)

Rated Power kVA	HV(kV)	Width mm	Depth mm	Height mm	Weight Kg
500	13.8	1500	1800	2200	2700
1000	13.8	1500	2200	2200	3600
1500	13.8	1800	2400	2200	5200
2000	13.8	2000	2500	2400	7300
500	33	1500	2000	2200	3100
1000	33	1700	2300	2200	4100
1500	33	1900	2400	2200	5700
2000	33	2200	2600	2400	7900

Max Dimensions (Copper)

Rated Power kVA	HV(kV)	Width mm	Depth mm	Height mm	Weight Kg
500	13.8	1500	1800	2200	2800
1000	13.8	1500	2000	2200	4100
1500	13.8	1800	2400	2200	5700
2000	13.8	2000	2500	2400	7400

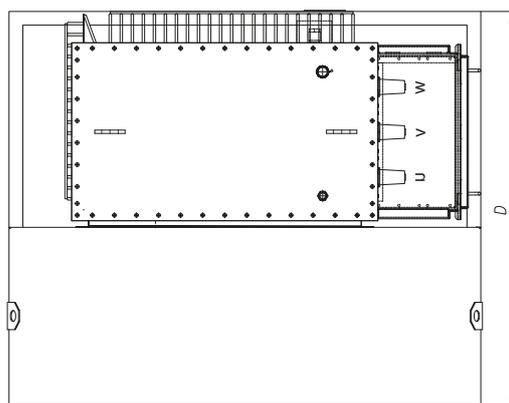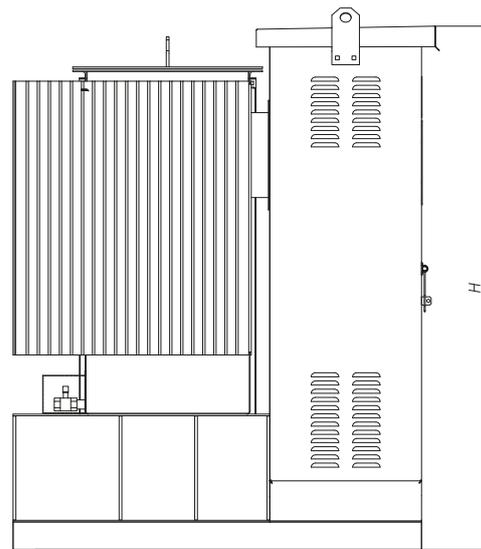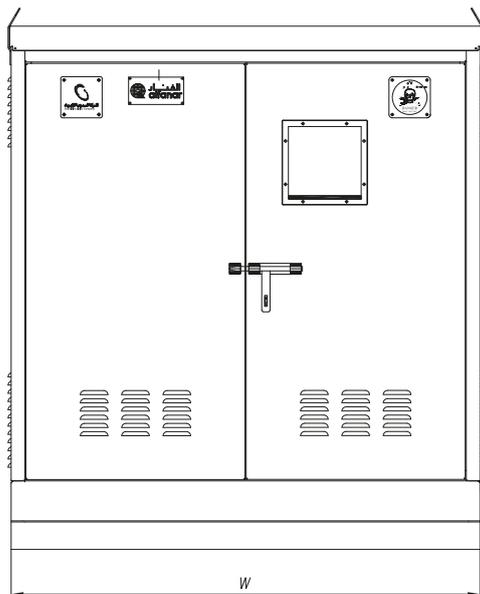

## D – Special Transformers



### 1. PV Transformers

PV transformers are the ideal solution for photo voltaic systems. The Technology used along with the appropriate sizing of the core, the framework, and the high quality materials used result in the most suitable product in terms of quality, reliability, efficiency and cost effectiveness.

#### Technical Data

<b>Transformer Type</b>	Three Phase, Photo Voltic Oil Immersed Distribution Transformers		
<b>Type of Breathing</b>	Hermetically Sealed /Radiator		
<b>Standard</b>	IEC60076		
<b>Rated Frequency</b>	60Hz		
<b>Connection and Vector Group*</b>	Dy11y11		
<b>Ambient Temperature*</b>	Ambient=50	Oil=50	Winding=55
<b>Winding</b>	CU or ALU		
<b>Type of Cooling</b>	ONAN		
<b>HV Tapping*</b>	Off-circuit tap changer 5 positions $\pm 2 \times 2.5\%$		

\* Subject to change according to customer requirements

# D – Special Transformers

## 2 – LV/LV Transformers

LV/LV transformers are generally in the range of hundreds of kVA and are frequently used for:

- Changing the low voltage level of:
  - Auxiliary supplies to control and indication circuits
  - Lighting circuits (230 V created when the primary system is 400 V 3-phase 3-wires)
- Changing the method of earthing for certain loads having a relatively high capacitive current to earth (computer equipment) or resistive leakage current (electric ovens, industrial-heating processes, mass-cooking installations, etc.).



Common Data	Three Phase, Oil Immersed Distribution Transformers (Indoor or Outdoor Installation)		
Standard	-		IEC60076
Rated Frequency		Hz	60 or 50
Connection and Vector Group*		-	Dyn11
Max. Temperature Rise*	Top Oil	°C	50
	Average Winding	°C	55
Type of Cooling		-	ONAN
Rated Primary Voltage	As per customer's request	kV	Up to 1 KV
Rated Secondary Voltage	As per customer's request	kV	Up to 1 KV
Winding	Copper or Aluminum Conductors		
Losses		-	As per Standards

\* Subject to change according to customer requirements

# D – Special Transformers

## 3 – MV/MV Transformers

MV/MV transformers are manufactured according to customer request in order to meet the technical features of the plant where they will be installed. **alfanar** provides technical engineering support from the preliminary studies of the transformer to assist the customer in the specification selection.



Common Data	Three Phase, Oil Immersed Distribution Transformers (Indoor or Outdoor Installation)		
Standard	-		IEC60076
Rated Frequency		Hz	60 or 50
Connection and Vector Group*		-	Dyn11
Max. Temperature Rise*	Top Oil	°C	50
	Average Winding	°C	55
Type of Cooling		-	ONAN
Rated Primary Voltage	As per customer's request	kV	Up to 36 kV
Rated Secondary Voltage	As per customer's request	kV	Up to 36 kV
HV Tapping	Off-circuit tap changer 5 positions	%	± 2x2.5
Winding		-	Copper or Aluminum Conductors
Primary Insulation Level			LI 75 / AC 28 / Um 12
			LI 95 / AC 38 / Um 17.5
			LI 125 / AC 50 / Um 24
			LI 170 / AC 70 / Um 36
Losses		-	As per Standards

\* Subject to change according to customer requirements

## D – Special Transformers

### 4 – Dual Voltage Transformers



A dual voltage transformer can be defined as a transformer capable of providing two types of voltages, i.e. if the two separate windings are connected in series, they will provide the sum of voltages supplied to the two coils and if the two windings are connected in parallel, then the net voltage will be decreased. These voltages can be switched within the transformer according to the type of output required by using a dual voltage switch.

Using a transformer which has reconnectable windings greatly reduces costs and saves time as many power applications require a number of voltage levels for different machines, in this case using different types of transformers is not a viable solution.

## • On Low Voltage

<b>Common Data</b>	Three phase, Oil Immersed Distribution Transformers (Indoor or Outdoor Installation)		
<b>Standard</b>	-	IEC60076	
<b>Rated Frequency</b>	Hz	60 or 50	
<b>Connection and Vector Group</b>	-	Dyn11	
<b>Max. Temperature Rise</b>	Top Oil	°C	50
	Average Winding	°C	55
<b>Type of Cooling</b>	-	ONAN	
<b>Rated Primary Voltage</b>	As per customer's request	kV	Up to 36 kV
<b>Rated Secondary Voltage</b>	As per customer's request	V	500-400 or 480-400 or 400-231, etc*
<b>HV Tapping</b>	Off-circuit tap changer 5 positions	%	± 2x2.5
<b>Winding</b>	-	Copper or Aluminum Conductors	
<b>Primary Insulation Level</b>	LI 75 / AC 28 / Um 12		
	LI 95 / AC 38 / Um 17.5		
	LI 125 / AC 50 / Um 24		
	LI 170 / AC 70 / Um 36		
<b>Losses</b>	-	As per Standards	

\* Subject to change according to customer requirements


## • On Medium Voltage

<b>Common Data</b>	Three phase, Oil Immersed Distribution Transformers (Indoor or Outdoor Installation)		
<b>Standard</b>	-	IEC60076	
<b>Rated Frequency</b>	Hz	60 or 50	
<b>Connection and Vector Group*</b>	-	Dyn11	
<b>Max. Temperature Rise*</b>	Top Oil	°C	50
	Average Winding	°C	55
<b>Type of Cooling</b>	-	ONAN	
<b>Rated Primary Voltage</b>	As per customer's request	kV	22/11 or 13.8-11 or 11-6.6 , etc
<b>Rated Secondary Voltage</b>	As per customer's request	kV	Up to 1 kV
<b>HV Tapping</b>	Off-circuit tap changer 5 positions	%	± 2x2.5
<b>Winding</b>	-	Copper or Aluminum Conductors	
<b>Primary Insulation Level</b>	LI 75 / AC 28 / Um 12		
	LI 95 / AC 38 / Um 17.5		
	LI 125 / AC 50 / Um 24		
	LI 170 / AC 70 / Um 36		
<b>Losses</b>	-	As per Standards	

\* Subject to change according to customer requirements

# D – Special Transformer

## 5- Oil Transformers with On-Load Tap Change (OLTC)

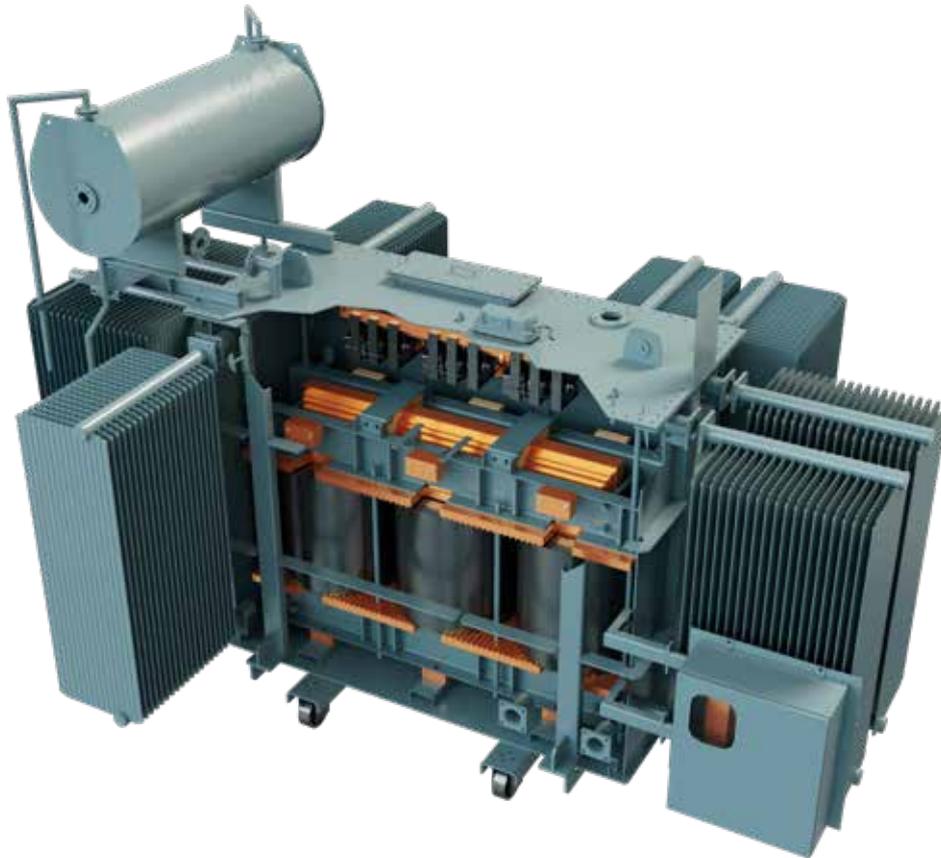

Onload Tap Changer: On-load tap changer (OLTC), also known as On-circuit tap changer (OCTC), is a tap changer in applications where a supply interruption during a tap change is unacceptable, the transformer is often fitted with a more expensive and complex on load tap changing mechanism.

### Technical Data

<b>Transformer Type</b>	Three Phase, Oil Immersed Distribution Transformers with On-Load Tap Change (OLTC)		
<b>Type of Breathing</b>	Hermetically Sealed /Radiator		
<b>Standard</b>	IEC60076		
<b>Rated Frequency</b>	60Hz		
<b>Connection and Vector Group*</b>	Dyn11		
<b>Ambient Temperature*</b>	Ambient=50	Oil=50	Winding=55
<b>Winding</b>	CU or ALU		
<b>Type of Cooling</b>	ONAN		
<b>HV Tapping*</b>	On load-circuit tap changer 17 positions $\pm 8 \times 1.25\%$		

\* Subject to change according to customer requirements

# D – Special Transformers

## 6- Non-Mineral Oil Transformers (KNAN)



The designation of cooling types of oil distribution transformers depends on the fire point of the oil being used in the transformer. Mineral oils are symbolized with “O” with minimum flash point 135°C as per IEC 60296- Ed. 4, 2012.

Non-mineral oils such as silicone oil, Synthetic Ester (which is also known in the market by the brand “Midel”) and Natural Ester (vegetable oils) are designated with “K” since their fire point is above 300°C.

Each letter in KNAN transformer cooling stands for:

K - indicates a beyond 300-degree Celsius fire point

N - denotes Natural

A - is equal to Air

N - Natural

- 100% fire safety record
- High fire point >300°C
- Classified as K-class
- Renowned resistance to ignition
- Midel doesn't contribute to the fire
- Self-extinguishing (Fire extinguished in 7.5 Seconds)
- No risk of pool fires

### alfanar High Temperature Transformers

The high temperature oil transformer is characterized by its high dielectric strength, high flash point, wide service temperature range, low vapor pressure, good heat capacity values, low pour point, low viscosity change at extremely high and low temperatures, and inertness to virtually all substrates.



#### Features

- High dielectric strength fluid
- High fire point > 300°minimal flammability and high temperature stability
- Low viscosity change, low volatility
- High thermal oxidation resistance
- Chemically inert
- Low toxicity
- Compatible with most existing transformer insulation systems
- Longer service life than conventional transformer oils

## D – Special Transformers

### 7- Transformer with hybrid insulation winding



There are three types of hybrid windings transformers.

The first type is a semi hybrid insulation windings transformer, mixed hybrid insulation windings transformer and a full hybrid insulation windings transformer.

Three hybrid winding types share the use of conventional barrier insulation and the use of high-temperature insulation on the windings.


# 6 - Accessories

## Standard Accessories

### 1. Bushing

Transformer bushings connect the network cables to the primary and secondary windings through a metallic cover while electrically isolating them.


The bushing's rating is chosen depending on the voltage, current and applications.

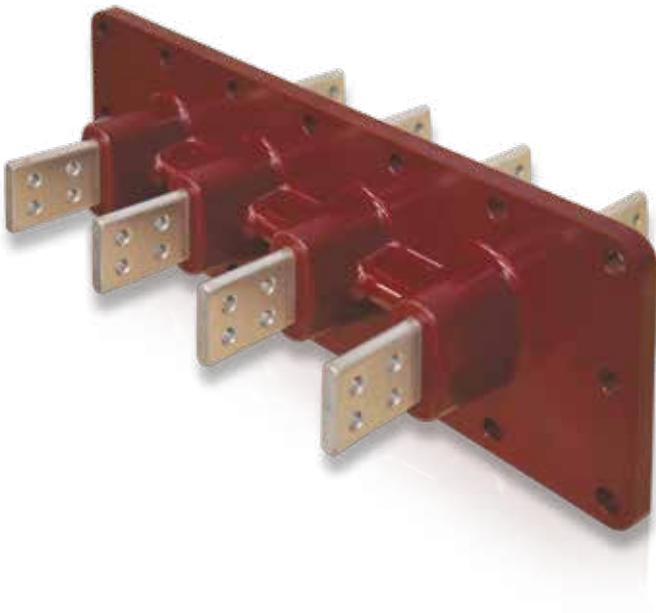


## Standard Accessories

### a. LV Bushing


Description	Max	Max
	Voltage (kV)	Current (A)
DT 1/250	1	250
DT 1/630	1	630
DT 1/1000	1	1000
DT 1 / 2000	1	2000
DT 1/3150	1	3150
DT 3/250	3	250

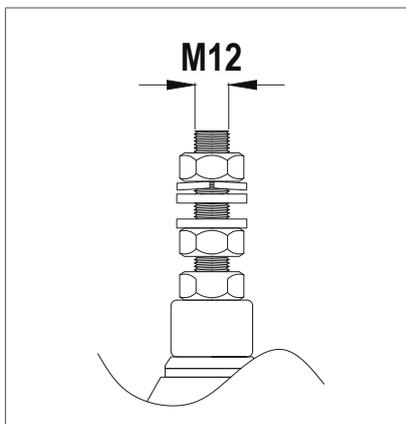


DT 1/250	Max Voltage (kV)	Max Current (A)
	1	250

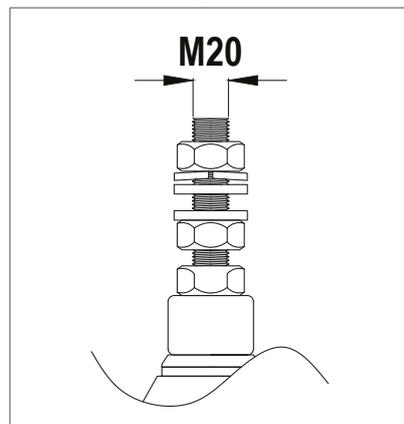


DT 1/630	Max Voltage (kV)	Max Current (A)
	1	630

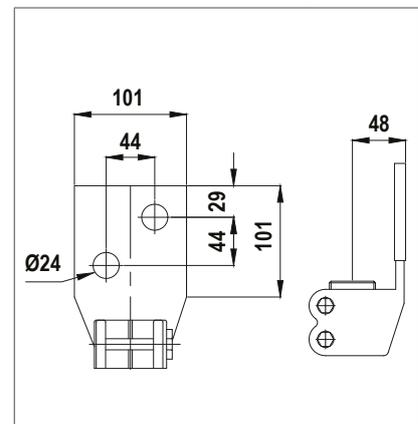


DT 1/1000	Max Voltage (kV)	Max Current (A)
	1	1000

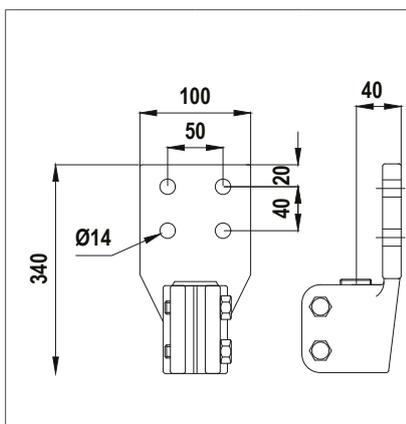

DT 1 / 2000	Max Voltage (kV)	Max Current (A)
	1	2000

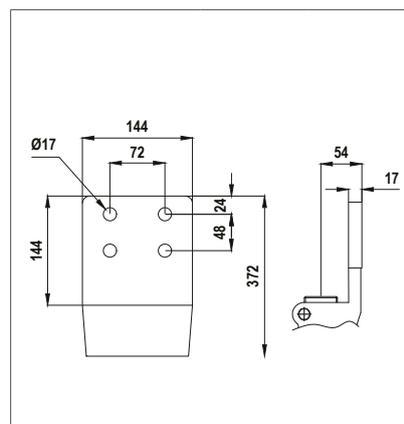

DT 1/3150	Max Voltage (kV)	Max Current (A)
	1	3150

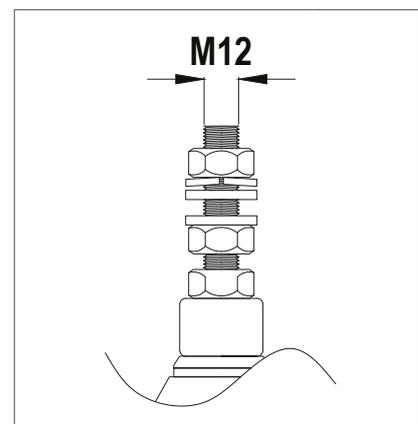


DT 3/250	Max Voltage (kV)	Max Current (A)
	3	250


Bushing St.1 Suitable for Low Voltage Side


## Standard Accessories


### a. LV Bushing


Description	Max	Max
	Voltage (kV)	Current (A)
DT 3/630	3	630
Bar 3.6/850	3	850
Bar 3.6/1600	3	1600
Bar 3.6/2500	3	2500
DT 3/4500	3	4500
DT 3/6300	3	6300

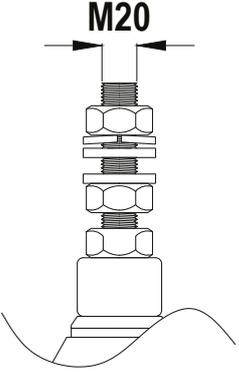
		
DT 3/630	Max Voltage (kV)	Max Current (A)
	3	630

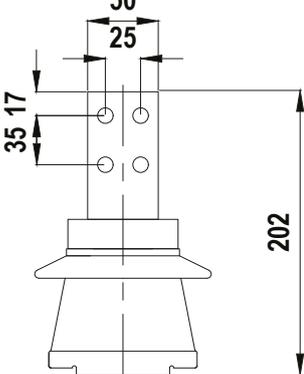		
Bar 3.6/850	Max Voltage (kV)	Max Current (A)
	3	850

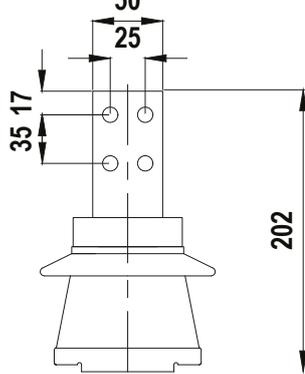		
Bar 3.6/1600	Max Voltage (kV)	Max Current (A)
	3	1600

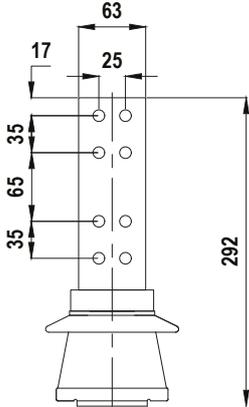		
Bar 3.6/2500	Max Voltage (kV)	Max Current (A)
	3	2500

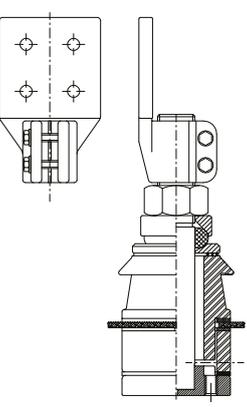		
DT 3/4500	Max Voltage (kV)	Max Current (A)
	3	4500




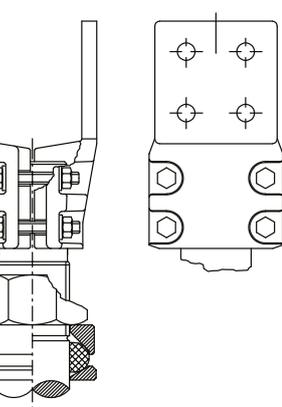
		
DT 3/6300	Max Voltage (kV)	Max Current (A)
	3	6300

Bushing St.1 Suitable for Low Voltage Side

## Standard Accessories

### a. LV Bushing


Description	Max	Max
	Voltage (kV)	Current (A)
Monoblock 1.1/800	1	800
Monoblock 1.1/1700	1	1700
Monoblock 1.1/2500	1	2500
Monoblock 1.1/4000	1	4000

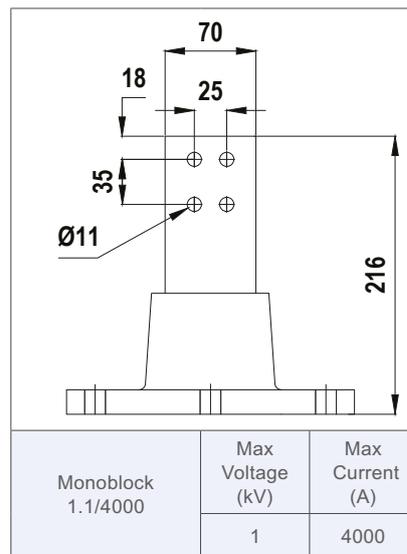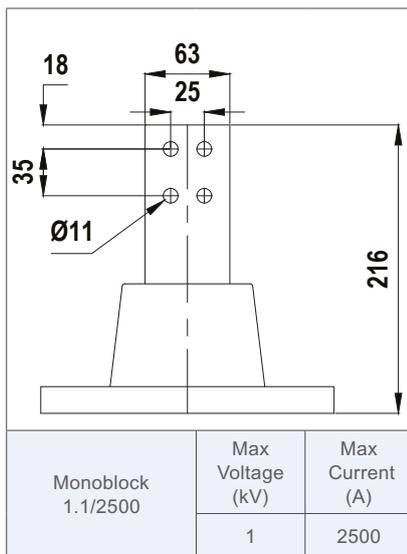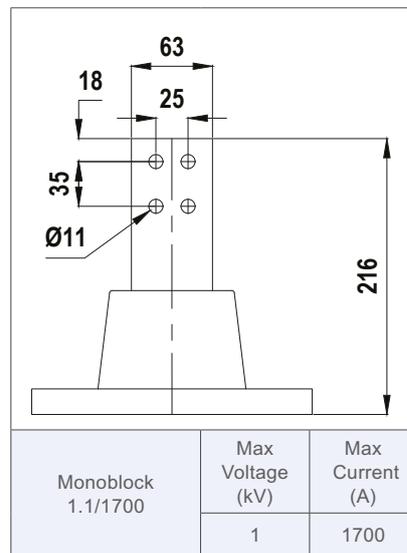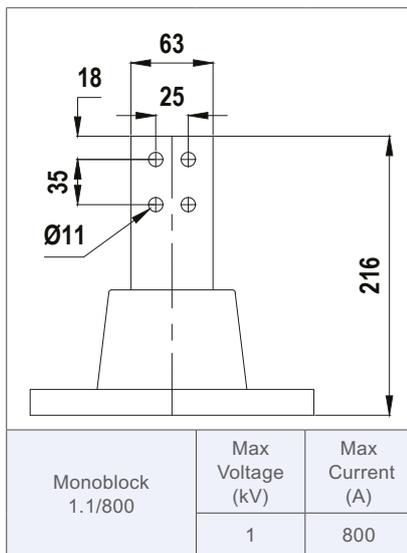


Bushing St.1 Suitable for Low Voltage Side

## Standard Accessories

### b. HV Bushing

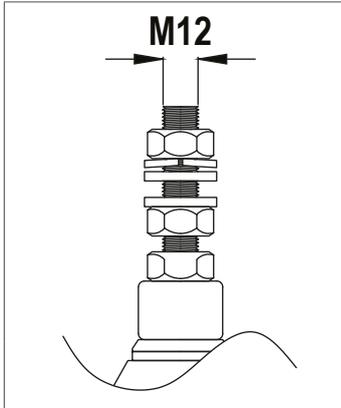


DIN Type Bushing			
Description	Max Voltage (kV)	Max Current (A)	Creepage (mm)
DT 20 NF/250 (440)	20	250	440
DT 30 NF/250(600)	30	250	600
30 / 250 - (1320)	30	250	1320
30 / 250 - (1650)	30	250	1650

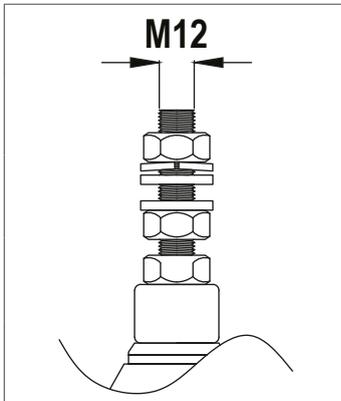


Heat Shrinkable Bushing			
Description	Max Voltage (kV)	Max Current (A)	Creepage (mm)
SH-17.5KV /250A-NI	17.5	250	170
SH-36 KV /250A	36	250	450

Shrinkable Material NOT in **alfanar** Scope of Supply

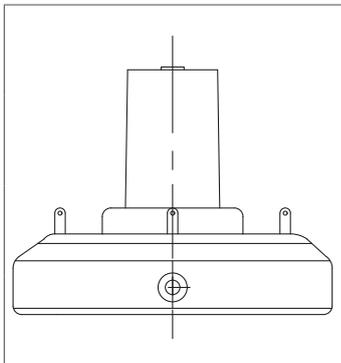

Plugin Bushing *			
Description	Max Voltage (kV)	Max Current (A)	Creepage (mm)
PL 24/250	24	250	N.A.

Suitable Elbow Connector NOT in **alfanar** Scope of Supply  
MAX. Cable Size 120 mm.

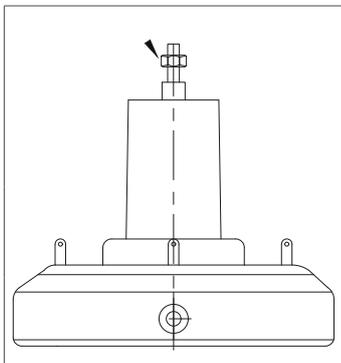

Plugin Bushing *			
Description	Max Voltage (kV)	Max Current (A)	Creepage
PL 36/630	36	630	N.A.

Suitable Elbow Connector NOT in **alfanar** Scope of Supply  
MAX. Cable Size 300 mm.

Bushing St.2 Suitable for High Voltage Side

\* For plugin bushing, suitable elbow connector to be used for cable connection.

## Standard Accessories

Polymer Type Bushing			
Description	Max Voltage (kV)	Max Current (A)	Creepage (mm)
24 kV/250 A	24	250	552
36 kV/250 A	36	250	1320



### 2. Cable Box

Cable boxes are enclosures for the transformer terminals. They provide protection from hazardous access to terminals, and protect the terminals from water, dust and mechanical impacts up to different degrees.

Protection degrees are described in IEC 60529. The cable box can be either top or side accessible depending on customer requirements.

The degree of protection which **alfanar** offers is IP 54 according to IEC 60529.



### 3. Oil Level Indicator

Transformers can be equipped with an oil level indicator on the conservator, on the cover or on the side, depending on the design.

Magnetic and prismatic types of oil level indicators are available.



### 4. Thermometer

The dial type thermometer indicates the maximum highest oil temperature reached during a certain period.

Two contacts are optional to provide an electrical signal, the first is for an alarm and the second for tripping.



### 5. Pressure Relief Valve

Hermetically sealed transformers can be equipped with a pressure relief device, preset to 0.3bar/0.43bar.

When a pressure exceeding 0.3bar/0.43 bar occurs inside the transformer, the pressure relief valve opens to evacuate the overpressure.

## 6. Earthing Terminal on Tank

Two earthing points are integrated in each tank, stainless stud, stainless flag with 12mm hole and stainless threaded M10 terminal are the available earthing point types.



## 7. Drain Valve

The drain valve is used to drain or sample the transformer oil from the transformer tank. These valves are fitted to the transformer tank by welding the pipe of the valve to the tank. These valves are 100% tested to ensure no leakages.



## 8. Tap Changer

The network voltage is usually not stable and varies between different locations. To keep the secondary voltage at a nominal value, a linear tap changer is used.

The transformer by default comes with 5 position and steps  $2x \pm 2.5$ .

Other types of tap changers and number of positions are available upon request. The different taps are indicated on the rating plate. The tap changer is off-circuit operated.

## 9. Lifting Lugs

Lifting lugs are used for untanking and lifting. 2 lugs are supplied for units weighing up to 3.5 tons, 4 lugs for heavier units.



## Optional Accessories



### 1. DMCR Relay

A DMCR relay is a multifunctional device. It indicates the temperature and oil level and is equipped with electrical contacts for:

- Gas formation
- Pressure excess
- 2 Temperature levels: alarm and trip

### 2. Oil Conservator

A cylindrical tank mounted on the supporting structure on the roof of the transformer (main tank). The main function of the oil conservator is to provide adequate space for expansion of oil inside the transformer for a breathing type tank transformer.



### 3. Buchholz Relay

The Buchholz Relay is used in conjunction with the conservator. Oil leakages, gas formations, and quick oil flow to the conservator are internal faults detected by the Buchholz Relay. Dry contacts are provided to signal these alarms.

### 4. Air Breather

The air breather is installed on the oil conservator. During normal operation the oil temperature changes resulting in an oil volume change, generating a bi-directional air flow from and to the conservator. The air breather contains silica gel which absorbs the air moisture. On delivery, the silica gel is pink, and becomes colorless when moisturized. Silica gel can be recycled by heating to 120 degrees until the color turns back to pink.



### 5. Roller

Bi-directional rollers are used for ground mounted units: diameter 125mm for ratings up to 630 kVA, diameter 150/200 mm for higher ratings.

### 6. Winding Temperature Indicator

This device measures the LV and HV winding temperature. A winding temperature indicator or WTI is also used as protection for the transformer.



# 7 – Package and Unit Substations

## Design and Structure

**alfanar** Package and Unit Substations are completely self-contained solutions for power distribution that include outdoor duty enclosure, medium voltage switchgear, distribution transformer, low voltage panel, and accessories such as power factor improvement equipment, control and protection equipment, all providing a cost effective and efficient total installation. It can be manufactured as a lighting substation (LSS), or Step Down/Step up substations, MV/MV, MV/LV, LV/:V

The solution packages are built in accordance to IEC Standards and Saudi Electricity Company (SEC) specifications, where the distinguished design provides the customer with a high level of flexibility to cover a wide range of applications.

The construction of the unit substation is almost the same as the package substation but without the MV side.



## MV Side (Ring Main Unit)

Each package substation contains the MV part which is in most cases the Ring Main Unit, known as the (RMU). **alfanar** has designed its own RMU under the name of SFA-RM.

SFA-RMs are designed for the supply of sustainable energy and protecting electrical equipment in secondary distribution networks up to 36kV.



SFA-RM units are the best solution for indoor/outdoor distribution substations. With their compact design they suit various network applications such as transformer substations, wind power plants, industrial zones.



The SFA-RM SF6 gas insulated units offer the following features:

- Compact design CESI type tested
- Switching units sealed in a SF6 gas filled stainless steel tank
- High level of operator safety and operating reliability
- Embedded cable testing compartment. Easy and safe cable testing without cable connection removal
- High quality tank welding, leakage rate of less than 0.1% per year
- Maintenance free unit with a life expectation of over 30 years
- Smart interlocking padlocking system for maximum operator safety
- Different feeder combinations with switch disconnect and vacuum circuit breaker
- Compatible with SCADA systems for remote control and monitoring
- Motorized options for circuit breakers and switches
- High resistance to pollution and humidity


# Technical Data Sheet

<b>Rated Voltage</b>		Up to 36kV
<b>Busbar Rating</b>		Up to 630 A
<b>Rated Frequency</b>		50 / 60 Hz
<b>Rated Nominal Current for Ring Switch</b>		Up to 630A
<b>Rated Nominal Current for Tee-off Feeder</b>		200/400 / 630 A
<b>Rated Short Time Withstand Current</b>		21 KA / 1 Sec 21 KA / 3 Sec
<b>Internal Arc Calcification</b>		A (FLR) 21 KA / 1 Sec ( indoor & Outdoor)
<b>Rated Filling SF6 Gas Level for Insulation</b>		1.2 bar (absolute)
<b>Minimum Functional SF6 Gas Level</b>		1.1 bar (absolute)
<b>Relative Humidity</b>		100%
<b>IP Class (Gas Tank / Indoor / Outdoor)</b>		IP 67/ IP41 / IP54
<b>Rated Lightning Impulse Withstand Voltage</b>		95 kV-peak
<b>Rated Power Frequency Withstand Voltage</b>		38 kV-rms
<b>Applied Standard</b>		IEC 62271-200
<b>Ring Switch Feeder (S)</b>	<b>Type of Switch-Disconnecter</b>	General purpose, three-positioned (OPEN-CLOSED-EARTHED)
	<b>Electrical Endurance Switch-Disconnecter/ Earthing Switch</b>	E3 / E0
	<b>Mechanical Endurance</b>	M1
	<b>Nominal Current</b>	Up to 630 A
	<b>Short Circuit Making Current</b>	21 kA (also valid for earthing switch) 54.6kA Peak
	<b>Applied Standard</b>	IEC 62271-103/102
<b>TEE-OFF Feeder (B)</b>	<b>Type of Breaker</b>	Vacuum
	<b>Electrical Endurance</b>	E3
	<b>Mechanical Endurance</b>	M1
	<b>Nominal Current</b>	Up to 630 A
	<b>Short Circuit Breaking Current</b>	21 kA
	<b>Applied Standard</b>	IEC 62271-100

# Transformer

The transformer is the main part of every package and unit substation, where the type is changeable based on customer specification and application:

- Oil immersed conservator type or hermetically sealed or dry type transformers can be installed
- Transformer bushings can be located on top or side of transformer as per customer needs
- Wide range of transformer capacities up to 3150 kVA
- Typical kVA's: 75, 100, 150, 160, 200, 250, 300, 315, 400, 500, 630, 750, 800, 1000, 1200, 1250, 1500, 1600, 2000, 2500, 3000, 3150
- **alfanar** package and unit substations are designed for simple and easy transformer installation onsite or integrated into the PSS in the factory

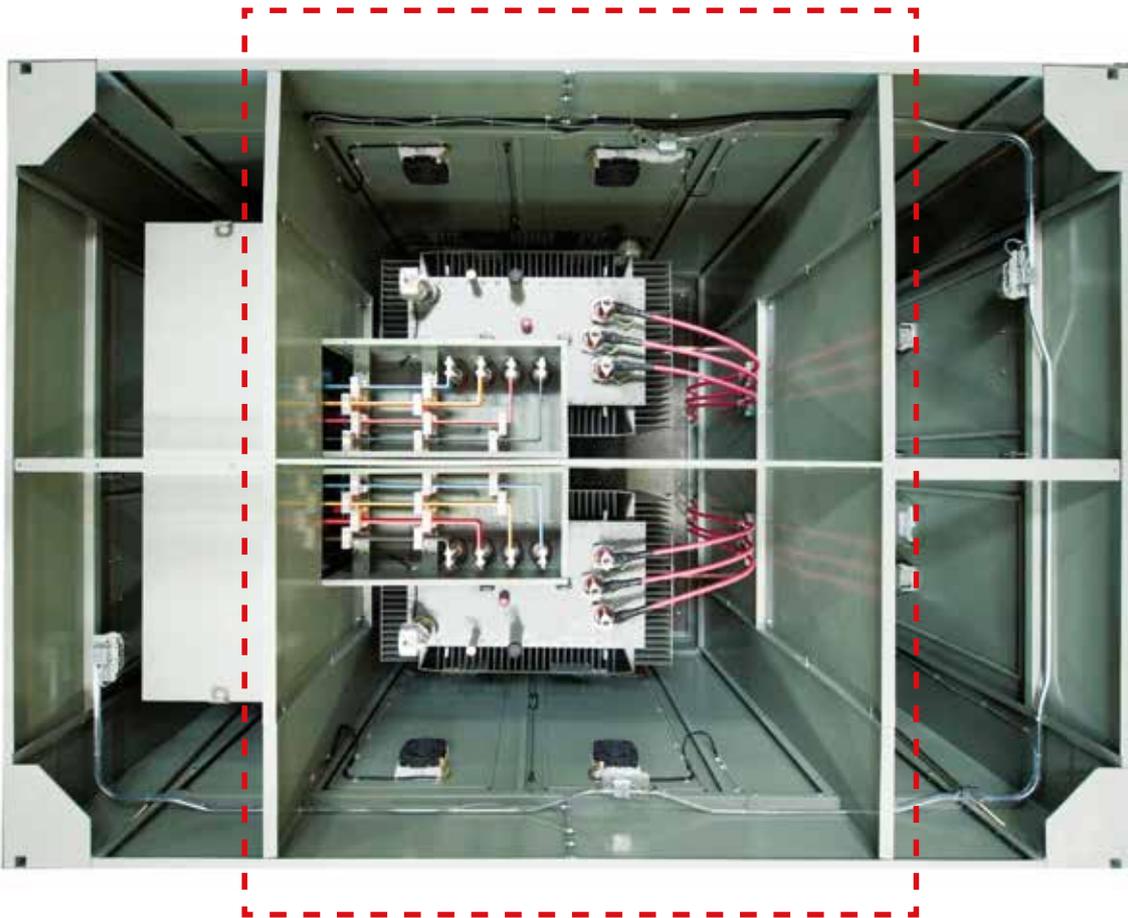

# Low Voltage Panel

LV Panel is manufactured for safe distribution and efficient control of electricity in residential, commercial and industrial premises.

**alfanar** LV products conform to most national and international standards.



- Incoming feeder options can be directly connected with circuit breakers and busbar links
- The LV busbar rating depends on the transformer rating
- Various number and ratings of outgoing feeders depend on transformer size and customer requirements
- Equipment for metering, protection, BMS, SCADA and control is available
- Incoming breaker up to 5000 A (Drawout/Fixed, Manual/Motorized)
- Current transformers
- Outgoing circuit breakers
- Sleeves busbar
- Special requirements-Auto transfer system (ATS), Power factor correction (PFC)

# PSS Technical Features

General		
Ambient Temperature	Normal Operating	Customer requirement
Outdoor Color	RAL 7033, RAL7035	
Location of Operation	Outdoor	
Ventilation Type	Natural	
Degree of Protection	MV and LV	Up to IP 54
	Transformer	IP 23
Electrical Characteristics		
Rated Voltage (kV)	11, 13.8, 17.5, 24, 36 *	
Rated Frequency (Hz)	50, 60	
Ring Main Unit		
Load Break Switch (A)	400, 630	
Transformer Feeder	Circuit Breaker, Switch	
Transformer		
Rated Transformer Hermetically Sealed	Up to 3150 kVA	
Vector Group	Dyn 11 *	
Low Voltage Panel		
Main Incomer	Up to 5000 A	
Metering Devices	Digital, Standard	
Busbar	With Sleeves	Tin, Silver Plated
BMS	Can be interfaced with building management system for monitoring and controlling	

## Standard Ratings and Dimensions

kVA (13.8)	100-250	300-400	500-630	750-1250	1500-1600	2000-2500	3150
Length (mm)	2962	3200	3518	3518	3718	3877	4200
Width (mm)	1800	2200	2200	2400	2600	2800	3000
Height (mm)	2200	2200	2300	2300	2300	2300	2500

kVA (33)	100-250	300-400	500-630	750-1250	1500-1600	2000-2500	3150
Length (mm)	3200	3518	3518	3518	3718	3877	4200
Width (mm)	2200	2400	2400	2400	2600	2800	3000
Height (mm)	2300	2300	2300	2300	2300	2300	2500

## 8 - Service

To complement its position as a market leader of transformer manufacturing and supply, **alfanar** provides testing and commissioning services.

Our highly qualified and competent commissioning engineers undertake the complete electrical testing and commissioning of transformers and ancillary equipment.



### **This service is split into two groups:**

- Dead testing is performed on the circuits when the transformers are de-energized, and from the initial testing of the circuits to outline the insulation resistance of the new circuits, and the continuity for the ring circuits.
- Live testing is performed on the circuits if the result of the dead test has been recorded as unsatisfactory, and once the installation has been put back together following the dead testing.

### **List of tests conducted:**

- 1- Visual inspection
- 2- Measurement of insulation resistance
- 3- Measurement of winding resistance
- 4- Measurement of voltage ratio and vector group
- 5- Energizing the transformer

## 9 - Testing

**alfanar** believes that quality means absolute congruity and compliance with customer requirements and international standards.

Therefore, **alfanar** has equipped its testing lab with the most modern testing equipment and instrumentation devices to ensure conformity to the highest level of quality and safety, where every transformer produced by **alfanar** is tested according to IEC Standards.



### Routine Tests

- 1- Measurement of winding resistance
- 2- Measurement of voltage ratio and phase displacement
- 3- Measurement of short circuit impedance and load losses
- 4- Measurement of no-load losses and current
- 5- Dielectric routine tests  
(separate source AC voltage withstand test and short duration induced over-voltage withstand test)
- 6- Measurement of insulation resistance

### Type Tests

- 1- Temperature rise test according to IEC 60076-2
- 2- Lighting impulse test according to IEC 60076-3

### Special Tests

- 1- Short circuit withstand test (as per IEC 60076-5)
- 2- Measurement of zero-sequence impedance(s) on three-phase transformers
- 3- Determination of sound levels (as per IEC 60076-10)
- 4- Measurement of the harmonics of the no-load current

# 10 - Inquiry Form

Ref No: \_\_\_\_\_

Customer Name	:	_____
Project	:	_____
CRM sub-opportunity	:	_____

## Feature of the Transformer

1- Installation location	<input type="checkbox"/> Indoor	<input type="checkbox"/> Outdoor	<input type="checkbox"/> Other
2- Winding Material	<input type="checkbox"/> Copper	<input type="checkbox"/> Aluminum	
3- Reference Standard	<input type="checkbox"/> I.E.C. 60076	<input type="checkbox"/> SEC Standard	<input type="checkbox"/> Export <input type="checkbox"/> Other
4- Installation Type	<input type="checkbox"/> P.S.S	<input type="checkbox"/> U.S.S	<input type="checkbox"/> Pad <input type="checkbox"/> Pole
5- Bushing	<input type="checkbox"/> Top bushing	<input type="checkbox"/> L.V. Side	<input type="checkbox"/> H.V Side <input type="checkbox"/> LV , HV Side
6- Type of oil sealing	<input type="checkbox"/> Hearmatically	<input type="checkbox"/> Conservator	<input type="checkbox"/>
7- Max. altitude from sea level of operating location of transformer	<input type="checkbox"/> < = 1000	<input type="checkbox"/> >1000	<input type="checkbox"/>
8- Parallel operation required with another transformer	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input type="checkbox"/>
9- Transformer with tap change	<input type="checkbox"/> Yes	<input type="checkbox"/> No	<input type="checkbox"/>
10- LV Cable box	<input type="checkbox"/> Without	<input type="checkbox"/> Side	<input type="checkbox"/> Top <input type="checkbox"/> Top + Busbar
11- HV Cable box	<input type="checkbox"/> Without	<input type="checkbox"/> Side	<input type="checkbox"/> Top

## Parameter of Transformer

1	Quantity	Unit	<input type="text"/>
2	Rated power	kVA	<input type="text"/>
3	Rated Primary Voltage at No Load & Connection Of Widing	V	<input type="text"/> <input type="checkbox"/> Delat <input type="checkbox"/> Star
4	Rated Secondary Voltage at No Load & Connection Of Widing	V	<input type="text"/> <input type="checkbox"/> Delat <input type="checkbox"/> Star
5	Rated Secondary Voltage at Full Load @ Spcified PF	V	<input type="text"/>
6	Voltage Sequence		<input type="checkbox"/> Step Down <input type="checkbox"/> Step Up
7	Rated frequency		<input type="checkbox"/> 60 HZ <input type="checkbox"/> 50 Hz
8	Vector group		<input type="checkbox"/> Dyn11 <input type="checkbox"/> Dyn5 <input type="checkbox"/> Ynd11
9	If any another remark, Please specify in detail		

## Optional accessories required

Use Standard Accessories ( Oil level indicator - Oil thermometer - Pressure relief valv  Yes  No

In Case Of No Please Choose From List And Add Your Requirement

Magnetic Oil Level Indicator ( Side )	<input type="checkbox"/> Yes
Vertical Oil Level Indicator ( Top )	<input type="checkbox"/> Yes
Dial Type Thermomter (Top)	<input type="checkbox"/> Yes
Dail Type Thermomter(Side)	<input type="checkbox"/> Yes
Oil Thermomter With 2 Contact ( Top)	<input type="checkbox"/> Yes
Pressure Relief Valve	<input type="checkbox"/> Yes
Roller	<input type="checkbox"/> Yes
D.M.C.R Rellay	<input type="checkbox"/> Yes
Thermowall Class 130 ( Scada RTD)	<input type="checkbox"/> Yes

If any additional Accessories required Please Insert Here

## Design Paramter If Non Standard

NO load Losses	:	<input type="text"/> Watt	Ambient Temp	<input type="text"/> C
Load Lossess	:	<input type="text"/> Watt	Oil Temp Rise	<input type="text"/> C
Voltage Impedance	:	<input type="text"/> %	Winding Temp Rise	<input type="text"/>







*For catalogue soft copy scan QR code*

MKT\_129576\_Dry Manual\_Jan 2023