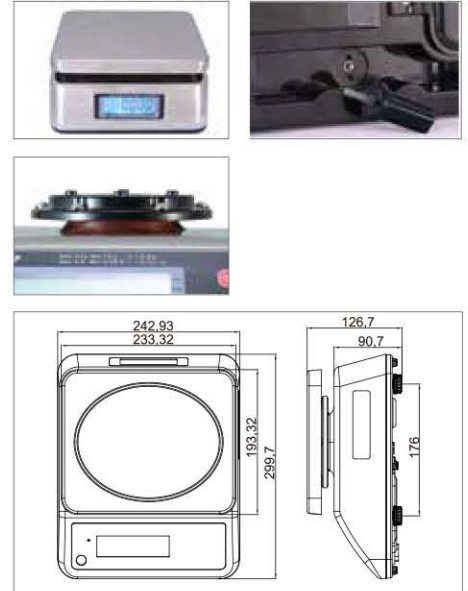# S29 Waterproof Weighing Scales

CE NTEP OIML M

Features

IP65 waterproof protection
High mobility: battery operation, compact, light weight construction, it is suitable for the use in several locations (kitchen, sales office, cafeteria, Food industry-Laboratory etc.)
Easy to clean: stainless steel pan and housing. Its smooth surfaces make it simple to clean
Easy to read: 6 digits 25mm digits high LCD display, with white color LED backlight
Full function: zero, tare, unit change

Technical Data

Display: LCD display, digit height 25 mm, with white color LED backlight
Power: AC adapter (100~240VAC/12V500mA), lead acid battery (6V/3.2Ah), operation time: 70 hours
Dimensions: 243×300x127 mm
Pan size: 230×190 mm
Net weight: approx. 4.2 kg
Operation temperature: -10°C/40°C

Accessories

■ Rear display

Standard

UNIT   IP   BATTERY

Factory Option

INT-VER

Model	Weighing Capacity [Max]kg	Readability [d]g	Verification value [e]g	Minimal load [Min]g
S29-3k	3	0.2	-	4
S29-6k	6	0.5	-	10
S29-15k	15	1	-	20
S29-25k	25	2	-	40
S29-3k-M	3	1	1	20
S29-6k-M	6	2	2	40
S29-15k-M	15	5	5	100
S29-25k-M	25	10	10	200
S29-6k-MR	3 | 6	1 | 2	1 | 2	20
S29-15k-MR	6 | 15	2 | 5	2 | 5	40
S29-25k-MR	15 | 25	5 | 10	5 | 10	100