


	SENDER WIRE COLOUR	EXT. WIRE COLOUR		
1	White	White/BLACK		
2	Red	GREEN		
3	Black	Black		

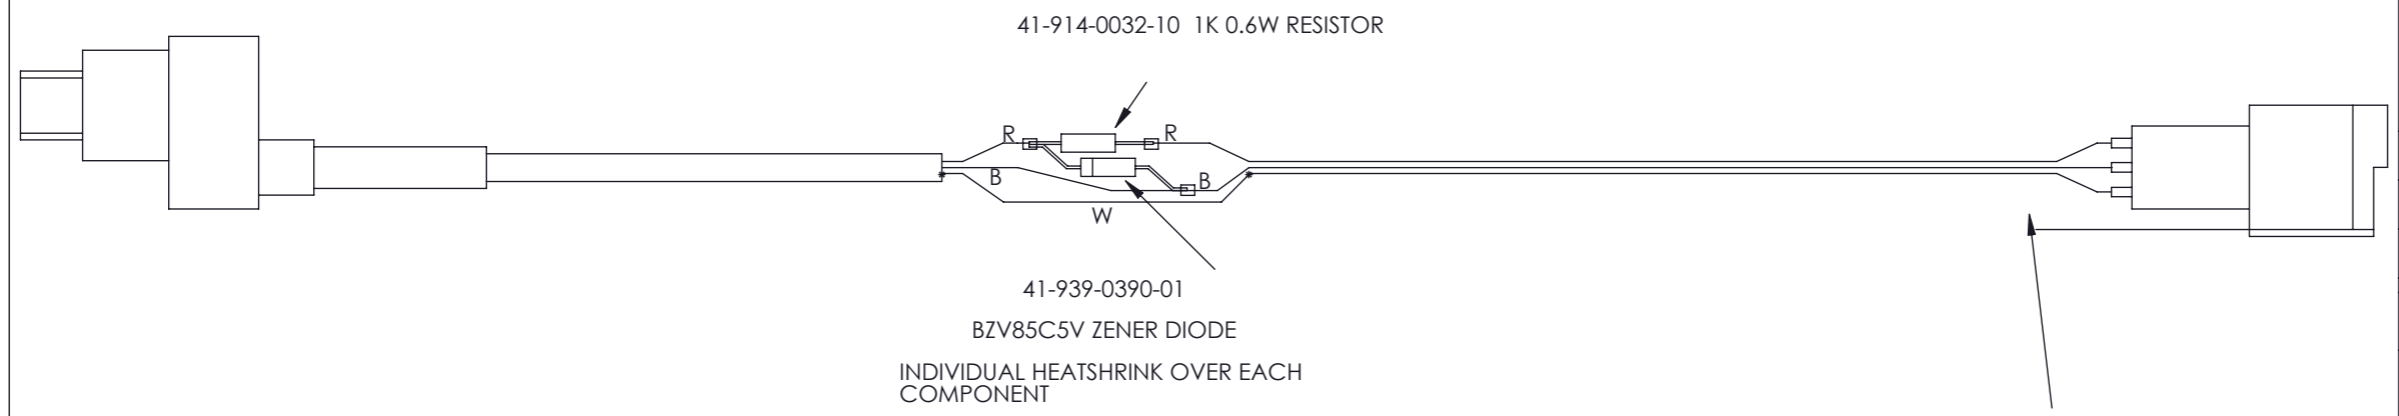

41-914-0032-10 1K 0.6W RESISTOR

41-939-0390-01
BZV85C5V ZENER DIODE

INDIVIDUAL HEATSHRINK OVER EACH COMPONENT

BZV85C5V ZENER DIODE CAN BE VALUE UP TO 6 VOLTS
1K 0.6W RESISTOR

3	Compt change	16.6.14	87922
2	Cmpts/length	5.9.13	87673
1	RELEASE	4.7.13	87578

ISSUE	MODIFICATION	DATE	NOTE No.
-------	--------------	------	----------

MATERIAL

FINISH

FIRST USED ON

SIMILAR TO.

CADFILE

DRG. No.

EMP46

SHEET 1 OF 1



ALL STANDARDS SPECIFIED ARE TO LATEST ISSUE

TOLERANCES (UNLESS OTHERWISE STATED)

ANGLES	± 30'
WHOLE FIGURE DIMENSIONS	± 0.40 mm
ONE PLACE DECIMAL DIMS	± 0.20 mm
TWO PLACE DECIMAL DIMS	± 0.10 mm

SCALE :- OR AS PRINTED

DIMENSIONS IN mm/ inches

THIRD ANGLE PROJECTION

TITLE.

SPEED SENDER VOLTAGE DROPPING CIRCUIT FOR EMP46

A3

IN ACCORDANCE WITH BS 308 FORM AND POSITIONAL TOLERANCES AND ASSOCIATED DATUM FEATURES APPLY

MODIFICATION MARK THUS

DRAWN.	CHECKED	MAN.APP	DES.APP.
<i>J. John</i>			