

DCS Grille Light Instructions

Thank you for choosing a DCS product. For questions or comments, please contact us at www.dcslighting.com

Tag & follow us! @dcslighting  

(We love photos of your rig)

Note: On JK, JL, & JT models it is optional to remove the grille for an easier installation.

- Lights attach to the metal strip at bottom of the grille area using magnets in base of the housing. DO NOT mount lights at the top of the grille, heat from the radiator will damage the lights and will not be warranted.
- Reflective shield is meant to face towards the radiator, this blocks the light from being seen from the front of the vehicle and to shine brighter in the grille. (Figure 1)
- If you have an existing DCS kit, then your lights will connect to the open plug on your C harness. Route your wire on either driver or passenger side to get to the plug.
- If you do not have a DCS kit, then route your wire to a fuse/relay protected power source with a max of 5 amps.
- Route wiring away from exhaust or any moving engine parts. Use zip ties to secure wire once installation is complete.

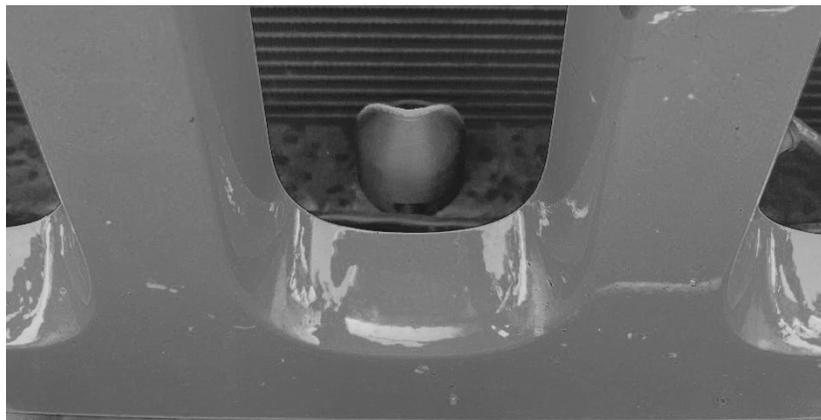


Figure 1