



LED Canopy Light Square Multi Wattage Multi CCT

FEATURES

- IP65 rated
- Optional pre-installed 8W Emergency Back-up Driver with Test Button
- Corrosion and rust proof
- Glare-free / flicker-free
- 50,000 hours lifetime

APPLICATIONS

- Auto Dealerships
- Commercial/Industrial
- Factories
- Schools
- Shopping Malls
- Stadiums
- Supermarkets
- Warehouses
- Logistic Centers



Square Canopy with pre-installed 8W Emergency Driver and Test Button

Quick Mount Back Plate



CONSTRUCTION Heavy die-cast aluminum housing with polyester powder-coated finish.	CONTROLS AND DIMMING 0-10V dimming.
OPTICAL SYSTEM Seoul 2835 LED chips. Frosted lens. 135° beam angle.	INSTALLATION AND MOUNTING Wall mount with quick mount back plate.
ELECTRICAL 120-277V input. -20°C to 50°C (-4°F to 122°F).	WARRANTY 5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

OPTIONAL ACCESSORIES



Motion Sensor-Microwave (Internal)
120-MSU-CP/VT-BMD



Remote Control
120-RCU-100



LED Canopy Light Square Multi Wattage Multi CCT


Part Number 120-CPSQXX-75-50-DIM

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
40W	3000K/4000K/5000K	5,400LM	135lm/W	120-277V	70	.9	20%	100W-320W HID
50W	3000K/4000K/5000K	6,750LM	135lm/W	120-277V	70	.9	20%	100W-320W HID
60W	3000K/4000K/5000K	8,100LM	135lm/W	120-277V	70	.9	20%	100W-320W HID
75W	3000K/4000K/5000K	10,125LM	135lm/W	120-277V	70	.9	20%	100W-320W HID

Part Number 120-CPSQXX-75-50-DIM-8VEM (Pre-installed 8W Emergency Back-up Driver)

WATTAGE SELECTABLE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
40W	3000K/4000K/5000K	5,400LM	135lm/W	120-277V	70	.9	20%	100W-320W HID
50W	3000K/4000K/5000K	6,750LM	135lm/W	120-277V	70	.9	20%	100W-320W HID
60W	3000K/4000K/5000K	8,100LM	135lm/W	120-277V	70	.9	20%	100W-320W HID
75W	3000K/4000K/5000K	10,125LM	135lm/W	120-277V	70	.9	20%	100W-320W HID

PRODUCT DIMENSIONS

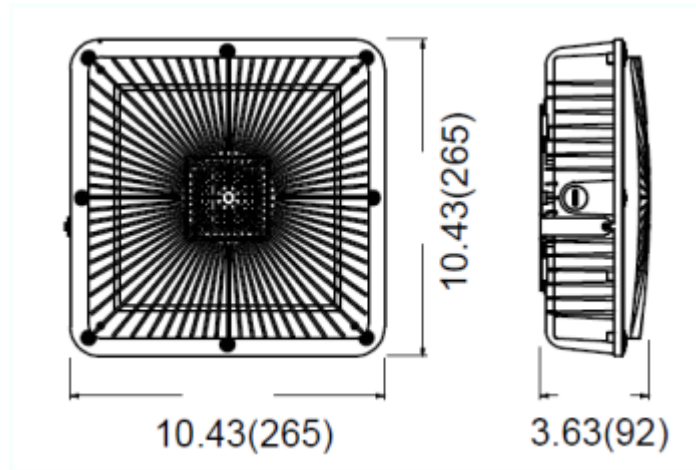



LED Canopy Light Square Multi Wattage Multi CCT

