



**BROOKING
INDUSTRIES, INC.**

Your Emergency Vehicle Equipment Super Source




EMERGENCY VEHICLE EQUIPMENT CATALOG


EMERGENCY LIGHTING | LIGHTING CONTROL
PRISONER TRANSPORT EQUIPMENT | INSTALLER ACCESSORIES

LED LIGHTING ICON GUIDE


These icons represent the main features for the LED lighting products.
Please reference these icons and their meanings as you explore our LED lighting sections.




Multi-unit synchronization
in simultaneous or
alternating flash modes




Non-volatile memory
recalls last flash
pattern used at power up




Aluminum base for
heat dissipation




Weatherproof &
vibration resistant



LEDs rated to 100,000+
hours of operation



Reverse polarity protection



5 year, no-hassle warranty

















Flood / scene lighting
capable





TABLE OF CONTENTS

Interior Lightbar	2	
Rooftop Lightbars	4	
Plug & Play Flashers	8	
Perimeter/Hideaway Lighting	10	
Warning / Directional Light Stick	22	
Lighting Control	24	
Consoles	29	
Siren Speaker	30	
Dash / Deck Lighting	31	
Prisoner Transport Equipment	32	
Mini Lightbars	34	
Flood / Scene Lighting	36	
Beacons	39	
Accessories	41	
Circuit Breakers	41	
Power Distribution Panel	41	
Fuse Blocks	42	
Overhead LED Dome Light	42	
TWY-Light	42	
Hard Seat Organizer	43	
Body Armor Hanger	43	
Back-up Alarm	43	
Outlet Boxes	44	

▶ ECLIPSE INTERIOR LIGHTBAR



ECLIPSE

Introducing the new **ECLIPSE INTERIOR LIGHTBAR**. The Intensely Bright, Moderately Priced Alternative.

Too much of anything is usually considered to be a bad thing, but when it's an abundance of warning power and budget savings, the Eclipse proves to be the exception to the rule.

By focusing on the essentials and providing priority options, Brooking is able to provide the most reliable, effective and affordable full-size interior lightbar solution in the public safety marketplace.

Tidal™ Optics




INTERIOR LIGHTBAR **ECLIPSE**

INTERIOR LIGHTBAR

GENERAL FEATURES

- Lightweight, low profile design
- New Tidal™ Optics produce maximum warning power
- Single color (6 LED) or dual color (12 interleaved LEDs) models. Tri-color coming soon.
- Easy To install - No drilling required - Utilizes factory visor clips / attachments
- Flood / scene mode (dual color only)
- User programmable TD's (choose up to 8, and location via DIP switches)
- Several vehicle specific models available. Contact a Brooking representative for a full listing.
- Universal model also available - accommodates most windshield rake angles. Drilling may be required with certain vehicles.
- 5 year warranty

FEATURES





▶ ROOFTOP LIGHTBARS TORRENT

LE SERIES TORRENT

Flood active



TORRENT

Introducing the second generation **TORRENT ROOFTOP LIGHTBAR**. Redesigned light modules and software have rejuvenated what was already the most reliable, and affordable lightbar in the industry.

LE SERIES TORRENT

GENERAL FEATURES

- 3 progressive warning modes
- Utilize single or dual color modules to achieve maximum functionality
- Inboard modules are available in single color with 6 LEDs, or dual color with 12 interleaved LEDs
- Corner modules are available in single color with 12 LEDs, or dual color with 12 interleaved LEDs
- Dual color configured lightbars provide added usage options and enhance standard features
 - Utilize dual color in the rear for conversion to amber in traffic control mode
 - Utilize dual color in the front for flood / scene lighting
 - Keep standard take-down style heads for true TD / spot beam + flood /scene
 - Delete standard style TD and gain more warning power + FULL front flood (no spot beam)
- Utilization of full, front-flood facilitates increased warning power by deleting standard takedown module positions
- 360° dual color, change bar color on the fly or alternate between colors via user programmed color mode selection
- Standard LED takedowns can be positioned anywhere in the lightbar - up to 4, front or rear facing
- 3 LED alley lights (optional)
- Available sizes: 35", 40", 44", 49", 54", 59"

STANDARD FEATURES


- Directional / traffic control patterns, front / rear cutoff, manual low power mode, flashing takedowns & alleys, flash pattern change, program mode for user defined flash patterns



COMMON FEATURES

- Low-profile design
- 2nd generation linear optics improve output and aesthetics
- 2nd generation software provides additional color change options (full front flood)
- Extruded aluminum chassis provides strength / rigidity, and dissipates heat
- Lenses are UV-stabilized, greatly reducing the yellowing and cracking associated with exposure to extreme conditions
- Traffic control patterns included at no additional charge
- Available LED colors: Amber, Blue, Red, White
- Mounting options: Graphite with vehicle specific straps, powder coated steel permanent mount (narrow or wide surface)

FEATURES

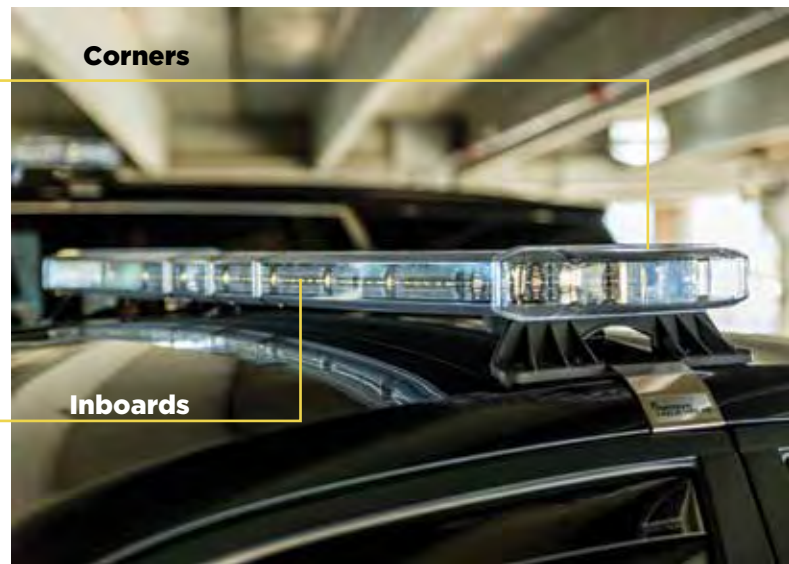

STOP / TAIL / TURN TORRENT

GENERAL FEATURES

- Two rear-facing light modules perform DRL, brake and turn signal functions
- Upgrade and adapt to border state's color codes via dual color software
- Optional 6 LED work lights / takedowns (up to 4, front or rear facing)
- 3 LED alley lights (optional)
- Users choice flash modes: (whole bar, split, outside-in, criss-cross, outside-in)
- Users choice flash pattern selection (10)
- Available sizes: 44", 49", 54", 59"

Specifications vary by model. Contact your Brooking representative for more information.



MOUNTING BRACKETS



LMBB - Standard Composite



TMBG - Flat Wide Permanent Mount - Powder Coated Steel



TMBF - Flat Narrow Surface Permanent Mount - Powder Coated Steel

▶ ROOFTOP LIGHTBARS LEGION

LEGION LIGHTBAR

An economical, budget-friendly option rife with features

LE SERIES LEGION

GENERAL FEATURES

- 3 progressive warning modes
- LED takedown and alley lights (optional)
- Standard features: directional / traffic control patterns, front / rear cutoff, manual low power mode, flashing takedowns & alleys, flash pattern change, program mode for user defined flash patterns
- Available LED colors: Amber, Blue, Red, White
- Available sizes: 43", 49", 54", 60"

STANDARD FEATURES

- Directional / traffic control patterns, front / rear cutoff, manual low power mode, flashing takedowns & alleys, flash pattern change, program mode for user-defined flash patterns



STOP / TAIL / TURN LEGION

GENERAL FEATURES

- Two rear-facing light modules perform DRL, brake and turn signal functions
- Optional 6 LED work lights (up to 4, front or rear facing)
- Alley lights optional
- Users choice flash modes: (front/back, side/side, criss/cross, whole bar)
- Traffic control patterns included at no additional charge
- Available sizes: 43", 49", 54" 60"



LEGION FIT SERIES

GENERAL FEATURES

- An economical option with simplified functionality (on/off, flash pattern change, low power)
- 3 LED inboard modules - 6 LED corners
- Single 4 wire harness includes battery direct power and ground, warning & flash pattern change / low power mode
- Available sizes: 24, 30", 36", 43", 49", 54" 60"



COMMON FEATURES

- High performance & cost competitive
- Low-profile design
- User friendly design for easy field maintenance - remove top panel
- Black polycarbonate base wrapped around a rigid extruded aluminum spine
- Lenses are UV stabilized, greatly reducing the yellowing and cracking associated with exposure to extreme temperatures
- Inboard modules are 3 LED, corners are 6 LED
- Available LED colors: Amber, Blue, Red, White
- Mounting options: Graphite with vehicle specific straps, powder coated steel permanent mount (narrow or wide surface)

FEATURES



STOP / TAIL / TURN
LEGION

MOUNTING BRACKETS



LMBB - Standard Composite



TMBG - Flat Wide Permanent Mount -
Powder Coated Steel



TMBF - Flat Narrow Surface Permanent Mount -
Powder Coated Steel

▶ **PLUG & PLAY HEADLIGHT FLASHERS**



FL-50HIFDC15:
2015+ DODGE CHARGER

Brooking has the capability to customize these **FLASHERS** to meet specific flash rate requirements. Contact a Brooking representative for more information.

SPECIFICATIONS OF FLASHERS

- Input Voltage: 12Vdc
- Flash rates: #1: Single wig-wag (240 FPM)
#2 Single wig-wag (400 FPM)
#3 Double wig-wag left/left right/right (400 FPM)
#4 Single wig-wag 4X - simultaneous left/right 2X
#5 Cycle #1 thru #4



HEADLIGHT FLASHERS

FL-41U-1: **2016+ FORD EXPLORER / UTILITY**

FL-40FIFM: **2013+ FORD SEDAN / 2013-2015 FORD EXPLORER / UTILITY**

FL-50HIFDC15: **2015+ DODGE CHARGER**

FL-CTF DRL FLASHER

GENERAL SPECIFICATIONS

- Vehicle make: 2008+ Chevrolet Tahoe
- 100% Solid State, encapsulated design for long-lasting, reliable performance
- High beam / brake / turn signal override
- Flashes both front and rear DRL's

COMMON FEATURES OF FLASHERS

- Plug & Play installation - no cutting of factory wires
- Plugs directly into OEM headlights - no additional factory options necessary
- Bypasses vehicle's body control modules and Can BUS system
- Four user-selectable wig-wag flash rates
- Auxiliary lead provides power for other nearby accessory lighting
- Compatible with both PPVs and civilian model vehicles
- Ideal for undercover / unmarked vehicles
- Easily transferrable
- 100% solid-state, encapsulated design for long-lasting, reliable performance
- Corrosion-proof ABS housing
- High beam override
- Brake & turn signal override - Activation of either disables / overrides flashing

▶ **PLUG & PLAY TAIL-LIGHT FLASHERS**

BRAKE PANEL / TAIL-LIGHT FLASHER

FEATURES

- Flashes entire 3-piece rear brake panel and tail-lights - outer brake panel ring alternates with brake lights

FL-80RFIP-2: **2015+ DODGE CHARGER**

FL-80RFID-2: **2014+ DODGE DURANGO**

TAIL-LIGHT FLASHER

FL-20RFIF-S: **2013+ FORD SEDAN**

FL-20RFIF-U: **2013+ EXPLORER / UTILITY**

FL-80RFIP-2: **2015+ DODGE CHARGER**



ST6 6 LED

▶ ST SERIES LIGHTHEADS


ST3 3 LED SUPER-THIN

SURFACE MOUNT

GENERAL SPECIFICATIONS

- Flash Patterns: 12
- Input Voltage: 12-24 Vdc
- Current Draw: 0.24A @ 12Vdc - 0.12A @ 24Vdc
- Sync: 15+ Units
- LED Count: 3
- Dimensions: 3.38" L X 1.1" H X 0.35" D
- Certificates: SAE J595 Class 1; CA Title 13, ECE R10-04
- Colors: Amber, Blue, Red, White

FEATURES



BENEFITS

- Super-thin profile
- Black bezel included - white & chrome sold separately




ST6 6 LED SUPER-THIN

SURFACE MOUNT

GENERAL SPECIFICATIONS

- Flash Patterns: 19
- Input Voltage: 12-24 Vdc
- Current Draw: 0.5A @ 12Vdc - 0.25A @ 24Vdc
- Sync: 15+ Units
- LED Count: 6
- Dimensions: 4.4" L X 1.1" H X 0.35" D
- Certificates: SAE J595 Class 1 (solid colors only); CA Title 13, ECE R10-04
- Colors: Amber, Blue, Red, White & most split-color combinations

FEATURES



BENEFITS

- Super-thin profile
- Black bezel included - white & chrome sold separately



**ST SERIES FEATURES
SUPER-THIN PROFILE**



.35" DEPTH


ST6V 6 LED SUPER-THIN

SURFACE MOUNT

GENERAL SPECIFICATIONS

- **Flash Patterns:** 19
- **Input Voltage:** 12-24 Vdc
- **Current Draw:** 0.5A @ 12Vdc - 0.25A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** 4.4"L X 1.1"H X 0.35"D
- **Certificates:** SAE J595 Class 1 (solid colors only); CA Title 13, ECE R10-04
- **Colors:** Amber, Blue, Red, White & most split-color combinations

FEATURES



BENEFITS

- Super-thin profile
- Vertical optics provide 30% more output when mounted vertically
- Black bezel included - white and chrome sold separately




ST26 12 LED SUPER-THIN

SURFACE MOUNT

GENERAL SPECIFICATIONS

- **Flash Patterns:** 25
- **Input Voltage:** 12-24 Vdc
- **Current Draw:** 0.78A @ 12Vdc - 0.39A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 12
- **Dimensions:** 4.4"L X 1.71"H X 0.35"D
- **Certificates:** SAE J595 Class 1; ECE R65 Class 2, ECE R10
- **Colors:** Amber, Blue, Red, White & most split-color combinations (top / bottom)

FEATURES



BENEFITS

- Super-thin profile
- 3 flash modes (top/bottom - side/side - criss-cross)
- Black bezel included - white and chrome sold separately

ST26 12 LED



▶ XTREME-THIN SERIES LIGHTHEADS

XT6 6 LED XTREME-THIN


SURFACE MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 16
- **Input Voltage:** 12-24 Vdc
- **Current Draw:** 0.44A @ 12Vdc - 0.22A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** 3.88"L X 1.38"H X 0.39"D
- **Certificates:** SAE J595 Class 1; CA Title 13, ECE R10 / 65
- **Colors:** Amber, Blue, Red, White (solid colors only)

FEATURES



BENEFITS

- Super-thin profile | Xtreme linear optics
- Black bezel included - white & chrome sold separately (Pictured with black bezel)

XT12 12 LED XTREME-THIN

SURFACE MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 26 (vary by color mode)
- **Input Voltage:** 12-24 Vdc
- **Current Draw:** 0.88A @ 12Vdc - 0.44A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 12 (dual color is 6x6 interleaved)
- **Dimensions:** 5.22"L X 1.77"H X 0.39"D
- **Certificates:** SAE J595 Class 1; ECE R65 Class 2, ECE R10
- **Colors:** Amber, Blue, Red, White & most interleaved combinations

FEATURES



BENEFITS

- Super-thin profile | Xtreme linear optics
- Available in single color (all 12), or dual color (12 interleaved)
- Black bezel included - white and chrome sold separately

XT12 12 LED
XTREME-THIN

XT12-R/W WITH WHITE
UTILIZED FOR ADDITIONAL
BACK-UP LIGHTING

PERIMETER LIGHTING

USE FOR STEADY CRUISE / ID / MARKER LIGHTING

SCENE LIGHTING

NEW

HB6 LIGHTHEAD



REVERSE / SCENE

HB6 6 LED


DUAL FUNCTION SURFACE MOUNT



GENERAL SPECIFICATIONS

- Flash Patterns: 14
- Input Voltage: 12-24 Vdc
- Current Draw: 0.675A @ 12Vdc - 0.375A @ 24Vdc
- Sync: 15+ Units
- LED Count: Warning Flashing: 6 Flood Ring: 18
- Dimensions: 5.20"L X 1.98"H X 0.74"D
- Certificates: SAE J595 Class 1, J592, J2042, CA Title 13
- Colors: Amber, Blue, Red, White (choose one for inner 6 and one for outer ring) - Not available with split color inner 6

FEATURES



BENEFITS

- Low-profile design
- Dual Function: Interior warning LED's surrounded by independent outer ring
- Outer Ring Uses: Scene (white), Cruise / ID, Stop / Tail / Turn

Each lighthead in the perimeter lighting section has its own unique version of the brackets pictured below. Consult a Brooking associate for a full listing.



Single L
(available in 90 degree and 45 degree)

Double L
(side by side)

Double L
(top/bottom)

Single Swivel
(2 Piece)

Single Fork/
Headliner

Dual
License Plate

▶ MS SERIES LIGHTHEADS

MS3BS 3 LED

SURFACE MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 12
- **Current Draw:** 0.2A @ 12Vdc - 0.11A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 3
- **Dimensions:** 3.4"L X 1.1"H X 0.6"D
- **Certificates:** SAE J595 Class 1, CA Title 13, E13
- **Colors:** Amber, Blue, Green, Red, White

MS6BS 6 LED

SURFACE MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 19
- **Current Draw:** 0.49A @ 12Vdc - 0.24A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** 5.0"L X 1.1"H X 0.68"D
- **Certificates:** SAE J595 Class 1 (solid colors only), CA Title 13, ECE R10-04
- **Colors:** Amber, Blue, Red, Green, White & most split-color combinations

MS6BSV 6 LED WITH VERTICAL OPTICS

SURFACE MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 19
- **Current Draw:** 0.49A @ 12Vdc - 0.24A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** 5.0"L X 1.1"H X 0.68"D
- **Certificates:** SAE J595 Class 1 (solid colors only), CA Title 13, ECE R10-04
- **Colors:** Amber, Blue, Red, White & most split-color combinations

BENEFITS

- Vertical optics provide 30% more output when mounted vertically

MS6D 12 LED DUAL COLOR

SURFACE MOUNT



GENERAL SPECIFICATIONS FEATURES

- **Flash Patterns:** 12
- **Current Draw:** 0.6A @ 12Vdc - 0.3A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 12 (Interleaved)
- **Dimensions:** 5.0"L X 1.1"H X 0.68"D
- **Certificates:** SAE J595 Class 1, CA Title 13, ECE R10-04
- **Colors:** Amber, Blue, Red, White & most interleaved combinations

FEATURES




BENEFITS

- Low profile
- DUAL COLOR - run color 1 or color 2, or alternate between the two

COMMON FEATURES OF MS SERIES LIGHTHEADS

- **Input Voltage:** 12-24 Vdc
- Low-profile design facilitates installation in tight spaces



MS26BS 12 LED

SURFACE MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 25
- **Current Draw:** 1.0A @ 12Vdc - 0.5A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 12
- **Dimensions:** 5.0"L X 1.92"H X 0.76"D
- **Certificates:** SAE J595 Class 1, CA Title 13, ECE R10-04
- **Colors:** Amber, Blue, Red, White & most split-color combinations (top / bottom)

BENEFITS

- 3 Flash modes (top/bottom - side/side - criss-cross)

MS3BH 3 LED

MULTI-MOUNT



GENERAL SPECIFICATIONS

- Flash Patterns:** 12
- Current Draw:** 0.2A @ 12Vdc - 0.11A @ 24Vdc
- Sync:** 15+ Units
- LED Count:** 3
- Dimensions:** 2.5"L X 0.94"H X 1.5"D (With Bracket)
- Certificates:** SAE J595 Class 1, CA Title 13, E13
- Colors:** Amber, Blue, Red, White

BENEFITS

- Multi-Mount design: Permanent (requires drilling), exposed edge & 3M™ double-sided adhesive (no holes drilled)

MS6BH 6 LED

MULTI-MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 19
- **Current Draw:** 0.49A @ 12Vdc - 0.24A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** 4.2"L X 0.94"H X 1.5"D (With Bracket)
- **Certificates:** SAE J595 Class 1 (solid colors only), CA Title 13, ECE R10-04
- **Colors:** Amber, Blue, Red, White & most split-color combinations

BENEFITS

- Multi-Mount design: Permanent (requires drilling), exposed edge & 3M™ double-sided adhesive (no holes drilled)



▶ ES6 LIGHTHEAD



LPF46
**UNIVERSAL
LICENSE PLATE
FRAME**


ES6 6 LED

MULTI-MOUNT

GENERAL SPECIFICATIONS

- Flash Patterns: 23
- Input Voltage: 12-24 Vdc
- Current Draw: 0.57A @ 12Vdc - 0.29A @ 24Vdc
- Sync: 15+ Units
- LED Count: 6
- Dimensions: 5.09" L X 0.62" H X 1.07" D
- Certificates: SAE J595 Class 1 (solid colors only), CA Title 13, ECE R65 / R10
- Colors: Amber, Blue, Red, White & most split-color combinations

FEATURES



BENEFITS


- Low-profile design facilitates installation in tight spaces - the narrowest light in the marketplace
- Composite mounting tabs included standard provide a variety of mounting options and saves cost of additional brackets




LPF46
Universal License Plate Frame

ES6 MOUNTING BRACKETS (INCLUDED WITH EACH UNIT)

UNIVERSAL BRACKET (Multi-angle)

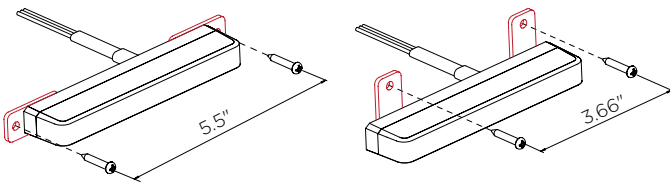

L-BRACKETS (Front/Rear)

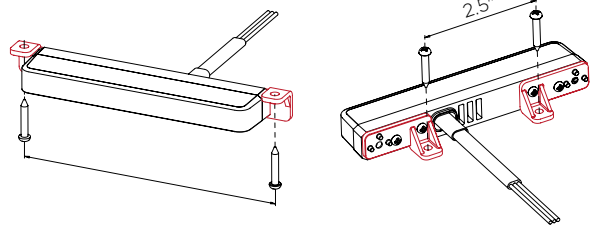

ES6 6 LED



▶ AL6 SERIES LIGHTHEADS



AL6S 6 LED

AL6S 6 LED

SURFACE MOUNT




PICTURED IN FORD INTERCEPTOR UTILITY GRILL UTILIZING AL6S-GB-FIU (BEZEL DISCARDED)

GENERAL SPECIFICATIONS

- **Flash Patterns:** 16
- **Input Voltage:** 12-24 Vdc
- **Current Draw:** 0.57A @ 12Vdc - 0.285A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** 3.81"L X 1.36"H X 1.41"D
- **Certificates:** SAE J595 Class 1 (solid colors only) - J845, ECE R65 / R10
- **Colors:** Amber, Blue, Red, White & most split-color combinations

FEATURES



BENEFITS

- Wrap around lens with linear optics produces super-effective, wide-angle output
- Black bezel included - white and chrome sold separately

AL6M 6 LED


UNDER MIRROR MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 16
- **Input Voltage:** 12-24 Vdc
- **Current Draw:** 0.57A @ 12Vdc - 0.285A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** 2.91"L X 1.37"H X 2.63"D (With Bracket And Cover)
- **Certificates:** SAE J595 Class 1 (solid colors only) - J845, ECE R65 / R10
- **Colors:** Amber, Blue, Red, White & most split-color combinations

FEATURES



BENEFITS

- Wrap around lens with linear optics produces super-effective, wide-angle output
- Unique bracketry allows for under-mirror mount on most vehicles, no additional wedges / parts necessary

FI-FIS: ABS FENDER TAB INSERTS
FOR 2013+ FORD INTERCEPTOR SEDAN

ID SERIES LIGHTHEADS



ID6 6 LED


ID6 6 LED

PROGRAMMABLE SURFACE MOUNT

GENERAL SPECIFICATIONS

- **Flash Patterns:** 15 (W/ 8 Modes Per Fp)
- **Input Voltage:** 12-24 Vdc
- **Current Draw:** 0.5A @ 12Vdc - 1.24A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** 5.09"L X 1.24"H X 0.66"D
- **Certificates:** SAE J595 Class 1 (solid colors only), ECE R65 / R10-04
- **Colors:** Amber, Blue, Red, White & most split-color combinations

FEATURES



BENEFITS

- Low-profile design
- Wrap around lens and off-set LEDs on the ends produce wider light spread
- Dual memory capability - set mode 1 as cruise / ID / flood mode and mode 2 for warning (warning overrides cruise)




ID26 12 LED

PROGRAMMABLE SURFACE MOUNT

GENERAL SPECIFICATIONS

- **Flash Patterns:** 15 (W/ 8 Modes Per Fp)
- **Input Voltage:** 12-24 Vdc
- **Current Draw:** 0.88A @ 12Vdc - 0.44A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 12
- **Dimensions:** 5.09"L X 1.98"H X 0.66"D
- **Certificates:** SAE J595 Class 1, ECE R65 / R10-04
- **Colors:** Amber, Blue, Red, White & most split-color combinations (top / bottom)

FEATURES



BENEFITS

- Low-profile design
- Wrap around lens and off-set LEDs on the ends produce wider light spread
- Dual memory capability - set mode 1 as cruise / ID / flood mode and mode 2 for warning (warning overrides cruise)



▶ TLED04B LIGHTHEAD

TLED04B 4 LED


SURFACE MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 19
- **Input Voltage:** 11-30 Vdc
- **Current Draw:** 0.28A @ 12Vdc - 0.15A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 4
- **Dimensions:** 4.8"L X 1.6"H X 1.2"D
- **Certificates:** SAE J595, CA Title 13, E13, E13
- **Colors:** Amber, Blue, Red, White & most split-color combinations

FEATURES



BENEFITS

- Economical and reliable
- Black bezel included - chrome sold separately

▶ M53 LIGHTHEAD

M53 3 LED


HIDE-AWAY / SURFACE MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 12
- **Input Voltage:** 12-24 Vdc
- **Current Draw:** 0.24A @ 12Vdc - 0.12A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 3
- **Dimensions:** 1.84" Diameter X 0.67"D
- **Certificates:** SAE J595, CA Title 13, E13
- **Colors:** Amber, Blue, Red and White

FEATURES



BENEFITS

- Hybrid design - surface mount (w/ bezel) or hide-away (discard bezel)
- Black bezel included; white and chrome sold separately

▶ HIDE-AWAY INSERTS / SURFACE MOUNT



HALO6 6 LED
SURFACE MOUNTED "INTERSECTION BUSTER"

HALO6 6 LED

HIDE-AWAY / SURFACE MOUNT




GENERAL SPECIFICATIONS

- **Flash Patterns:** 19
- **Input Voltage:** 10-16 Vdc
- **Current Draw:** 0.65A @ 12Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** *Insert:* 1.1" Diameter X 0.84"H X 1.26"D
Bezel: 2.26"L X 1.65H X 0.4"D
- **Colors:** Amber, Blue, Red, White & most split-color combinations



FEATURES



BENEFITS

- 45° LED orientation
- Color mode options facilitate versatile functionality
- 1 in-line flasher powers both heads
- Black bezels included - white and chrome sold separately

HALO9 9 LED


HIDE-AWAY / SURFACE MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 19
- **Input Voltage:** 12-24 Vdc
- **Current Draw:** 1.25A @ 12Vdc - 0.63A @ 24Vdc
- **Sync:** 15+ Units
- **LED Count:** 9
- **Dimensions:** *Insert:* 1.49" Diameter X 1.13"H X 0.67"D *Bezel:* 2.26"L X 1.65H X 0.4"D
- **Colors:** Amber, Blue, Red, White

FEATURES



BENEFITS

- Pyramid (3x3x3) design produces 360° output
- 1 in-line flasher powers both modules
- Black bezel included - white and chrome sold separately

PAL06 6 LED


HIDE-AWAY / SURFACE MOUNT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 19
- **Input Voltage:** 10-16 Vdc
- **Current Draw:** 0.65A @ 12Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** *Insert:* 1" Diameter X 0.95"H X 1.2"D *Bezel:* 2.26"L X 1.65"H X 0.4"D
- **Colors:** Amber, Blue, Red, White & most split-color combinations

FEATURES



BENEFITS

- Color mode options facilitate versatile functionality
- Rubber pop-in base facilitates quick and easy installation
- 1 in-line flasher powers both heads
- Black bezel included - white and chrome sold separately

TAL06 6 LED TWIST-LOCK HIDE-AWAY


HIDE-AWAY



GENERAL SPECIFICATIONS

- **Flash Patterns:** 19
- **Input Voltage:** 10-16 Vdc
- **Current Draw:** 0.65A @ 12Vdc
- **Sync:** 15+ Units
- **LED Count:** 6
- **Dimensions:** *Insert:* 1.03" Diameter X 0.5"H
- **Certificates:** SAE J595 Class 1
- **Colors:** Amber, Blue, Red, White & most split-color combinations

FEATURES



BENEFITS

- Twist-lock design facilitates no-holes drilled installation
- Optional L-bracket available for alternative applications
- Optical lens maximizes output
- 1 in-line flasher powers both heads



TAL06 6 LED TWIST-LOCK



▶ **RayZR LIGHT STICK**

FIU-RLP
REAR SPOILER POD

FIU-RLP **REAR SPOILER POD**

Ford Utility

GENERAL SPECIFICATION

- Vacuum-formed, UV-stabilized ABS plastic RayZR pod for 2013+ Ford Explorer

BENEFITS

- No-holes drilled mounting (user choice)
- Provides upper level rear facing lighting without obstructing driver's rear-view. Perfect for slick-top vehicles.

RHP-CT15 **REAR HATCH POD**

Chevy Tahoe

GENERAL SPECIFICATION

- Vacuum-formed, UV-stabilized ABS plastic RayZR pod for 2015+ Chevrolet Tahoe

BENEFITS

- Upgrade and add surface mount lightheades to sides
- No-holes drilled mounting (user choice)
- Provides mid-level rear facing lighting without obstructing driver's rear-view



RHP-CT15 **REAR HATCH POD**

RayZR LIGHT STICK

SPECIFICATIONS

- **Flash Patterns:** 4 Head: 27 (No Traffic Patterns)
- 6, 8 & 10 Head: 20 Warning / 11 Traffic
- **Input Voltage:** 12-24 Vdc
- **Current Draw** (@ 12.8 Vdc): 4 Head 1.1A, 6 Head 1.5A,
- 8 Head 1.9A, 10 Head 2.4A
- **Sync:** No
- **LED Count:** Varies By Length / Head Count (3 LED's Per Module)
- **Dimensions:**
 - **Length:** 4 Head - 18" | 6 Head - 26.50"
8 Head - 34.50" | 10 Head - 43.44"
 - **Height:** 0.95"
 - **Depth:** 1.50"
- **Certificates:** SAE J595 Class 1, SAE J845, CA Title 13
- **Colors:** Amber, Blue, Red, Green, White



FEATURES



BENEFITS

- Low profile
- Lightweight
- Traffic control patterns included at no additional charge
- Field service-friendly
- Vehicle-specific pods and multiple universal mounting options available

MOUNTING BRACKETS



Mini L bracket



Standard L bracket



Height & Angle Adjustable



Flush Mount



4 HEAD RayZR LIGHT STICK

▶ 99 SERIES DIGITAL SMART PANELS

The perfect LIGHTING CONTROL solution for undercover units.

COMMON FEATURES OF 99 SERIES DIGITAL SWITCH PANELS

- Self-performing diagnostics at power-up
- Digital switching facilitates faster accessory activation, lower operating current & increased reliability
- Walk-about test mode: Activate mode and each button's zone activates for 5 seconds
- Silicone rubber push buttons
- LED backlighting for easy button recognition
- 60-title adhesive legend sheet
- 2-piece swivel mount bracket included with each unit at no additional charge
- Console mounting plate available (sold separately)

BR-990 DIGITAL SMART PANEL (12V)



FEATURES

- 60A max output (10A per switch)
- Master switch programming: Assign buttons 2 thru 5 to operate in conjunction with button # 1. Or program up to 4 buttons as momentary and 1 as an 8-second timed momentary
- Compact / slim design

Warranty: 5-year

BENEFITS

- Sleek design: 6.5"L x 2.5"H x 1.25"D
- Robust programming capability

BR-995 DIGITAL SMART PANEL (12V)



FEATURES

- 12A max output
- BR-RFT relay fuse table increases load per switch capability to 10A (see page 25)
- Upper 3 buttons can be configured to operate any combination of lower 6 buttons
- Program lower six buttons to mimic traffic control patterns (if applicable)

Warranty: 5-year

BENEFITS

- Sleek design: 6.5"L x 2.5"H x 2"D
- Robust programming capability

BR-997 DIGITAL PURSUIT SMART PANEL (12V)



FEATURES

- 12A max output
- BR-RFT relay fuse table increases load per switch capability to 10A (see page 25)
- Upper 3 buttons can be configured to operate any combination of lower 6 buttons
- Program lower six buttons to mimic traffic control patterns (if applicable)
- Hidden membrane switches for backlight dim and user choice (ex: timed gun lock)

Warranty: 5-year

BENEFITS

- Sleek design: 6.5"L x 2.5"H x 2"D
- Robust programming capability



BR-990 DIGITAL SMART PANEL

▶ **MINI DIGITAL CONTROLLER**

SW-830 MINI DIGITAL CONTROLLER (10-24VDC)




FEATURES

- 8 silicone rubber push buttons (3 x 10A w/ built-in relays - 5 x 0.2A)
- Program all 8 as either toggle or momentary
- LED backlighting
- LED read-out mimics traffic arrow pattern
- 35-title adhesive legend sheet
- Mounting options: Adjustable pedestal with suction cup for glass, or adhesive for dash / flat surface

Warranty: 5-year

BENEFITS

- Compact Design
- Control Panel: 3.74"W x 2.7"H x 1"D
- Power Module: 4.4"W x 3.5"L x 1.05"D



BR-RFT

Boosts the amp load capability of the 995 or 997 to 20A per switch. Machine-crimped ends on both input and output ease installation, and a capped, 40A in-line fuse provides added protection for accessories.

THIS UNIT CAN BE USED TO INCREASE THE AMP LOAD CAPABILITY OF ANY SWITCHING DEVICE.

▶ CONSOLE SWITCH PLATES



SP-6SWC
SWITCH PLATE

SP-4SWCMUSB
SWITCH PLATE

SP-970S SWITCH PLATE



FEATURES

- Six-lighted rocker switches (15A) - Number 1-5 are two position (on/off), #6 is three position (on/off/momentary)
- 3 mode progressive slide switch (40A)
- In-line auto-resetting relay (40A)
- 2' wiring harness
- Durable, powder-coated steel plate
- LED back-lit legends
- 60-title adhesive legend sheet
- Fits most major manufacturer's consoles
- Dimensions: 8.56"L x 3"H

Warranty: 3 year

SP-6SW2O SWITCH PLATE



FEATURES

- Six-lighted rocker switches (15A)
- Two independently switched 12V receptacles w/ rubber covers
- Attached rubber covers keep receptacles clear of liquids and debris
- 2' wiring harness
- Durable, powder-coated steel plate
- LED back-lit switch titles
- 60-title adhesive legend sheet
- Fits most major manufacturer's consoles
- Dimensions: 8.56"L x 3"H

Warranty: 3 year

SP-10SW SWITCH PLATE



FEATURES

- Ten-lighted rocker switches (15A)
- **Also available in 6 and 8 switch model**
- 2' wiring harness
- Durable, powder-coated steel plate
- LED back-lit switch titles
- 60-title adhesive legend sheet
- Fits most major manufacturer's consoles
- Dimensions: 8.56"L x 3"H

Warranty: 3 year

SP-6SWC SWITCH PLATE



FEATURES

- Six-lighted Carling-style switches (25A)
- Larger Carling-style switches promote easier recognition and more precise operation
- 2' wiring harness
- Durable, powder-coated steel plate
- LED back-lit switch titles
- 60-title adhesive legend sheet
- Fits most major manufacturer's consoles
- Dimensions: 8.56" L x 3"H

Warranty: 3 year

SP-3SWC20 SWITCH PLATE



FEATURES

- Three-lighted Carling-style switches (25A)
- Larger Carling-style switches promote easier recognition and more precise operation
- Two constant hot (+) 12V receptacles
- Attached rubber covers keep receptacles clear of liquids and debris
- 2' wiring harness
- Durable, powder-coated steel plate
- LED back-lit switch titles
- 60-title adhesive legend sheet
- Fits most major manufacturer's consoles
- Dimensions: 8.56" L x 3"H

Warranty: 3 year

SP-4SWCMUSB SWITCH PLATE



FEATURES

- Four-lighted Carling-style switches (25A)
- Larger Carling-style switches promote easier recognition and more precise operation
- One push button momentary
- Two constant hot (+) USB ports
- Attached rubber cover keeps ports clear of liquids and debris
- 2' wiring harness
- Durable, powder-coated steel plate
- LED back-lit switch titles
- 60-title adhesive legend sheet
- Fits most major manufacturer's consoles
- Dimensions: 8.56" L x 3"H

Warranty: 3 year

SP-9SWC30 SWITCH PLATE



FEATURES

- Six-lighted Carling-style switches (25A)
- 3-mode, progressive slide switch (40A)
- In-line auto-resetting relay (40A)
- Three independently switched 12V receptacles (lighted rocker switches)
- Receptacles protected by 15A in-line fuse
- Attached rubber covers keep receptacles clear of liquids and debris
- 2' wiring harness
- Durable, powder-coated steel plate
- LED back-lit switch titles
- 60-title adhesive legend sheet
- Fits most major manufacturer's consoles
- Dimensions: 8.56" L x 5"H

Warranty: 3 year

▶ SWITCHBOXES

COMMON FEATURES OF BR-950, BR-959J, BR-960, BR970S SWITCH BOXES

- 2' wire harness
- Durable-powder-coated steel case
- LED back-lit switch titles
- 60 title adhesive legend sheet with extra white tiles
- Bail bracket and mounting hardware included

Dimensions: 6.25"L x 5" D x 2.25" H

BR-935 SWITCHBOX



FEATURES

- Three lighted rocker switches (15A)
- (2) on / off - (1) momentary
- 2' wiring harness
- Recesses in top of mounting plate allow for discreet under dash mount

Warranty: 3-year

BR-950 SWITCHBOX



FEATURES

- 5 lighted rocker switches (15A)

BR-959J SWITCHBOX



FEATURES

- Six lighted rocker switches (15A) - Number 1-5 are two position (on/off), #6 is three position (on/off/momentary)

BR-960 SWITCHBOX



FEATURES

- Six lighted rocker switches - Switch #1 (40A), 2-5 (15A)

BR-970S SWITCHBOX



FEATURES

- Six lighted rocker switches (15A) - Number 1-5 are two position (on/off), #6 is three position (on/off/momentary)
- 3 mode progressive slide switch (40A)

► CONSOLES



BC-LBSK CONSOLE

BC-LBSK CONSOLE

GENERAL SPECIFICATIONS

- Powder-coated steel construction
- Fits most larger vehicles (SUV, Pick-Up)
- Vehicle specific "saddle" bases available

FEATURES

- Foam padded armrest
- Large dual cup holders w/ plate
- Optional side mount ticket book holder / pen holder
- 3-piece filler plate kit fills gaps caused by odd-sized equipment plates

BENEFITS

- Universal design fits most larger vehicles (SUV / Pick- Up)
- Adjustable height (front & rear)
- Indention on driver's side keeps armrest out of seating area, creating more space for the driver

BD-DC2 CONSOLE

GENERAL SPECIFICATIONS

- Powder-coated steel construction
- Fits 2011 - 2017 Dodge Charger
- Mounts directly to PPV drive tunnel (Must have OEM bolts or OEM mounting base)

FEATURES

- Side-mounted, height-adjustable, foam-padded armrest
- Large dual cup holders w/ plate
- Laptop stand plate that accommodates most manufacturer's stands
- Mounts directly to PPV drive tunnel (Must have OEM bolts or OEM mounting base)
- 3-piece filler plate kit fills gaps caused by odd-sized equipment plates
- Outlet plate for factory 12V & USB receptacles

BENEFITS

- Replaces factory console
- One-piece construction
- Lower height between seats
- Indention on rear driver's side keeps armrest out of seating area, creating more space for the driver



BD-DC2 CONSOLE

► SIREN SPEAKER

LS-100 100W SIREN SPEAKER



GENERAL SPECIFICATIONS

- **Watts:** 100W
- **Magnet:** Neodymium
- **Impedance:** 8/11 Ohms Nominal
- **Frequency Response:** 450-3500 Hz +/- 10dB Nominal
- **Dispersion:** 80° x 105° 1KHz Octave Band
- **Dimensions:** 5.2"H x 6.4"W x 3"D
- **Warranty:** 2 Years

FEATURES

- Produces loud emergency signaling and intelligible voice / P.A.
- Durable aluminum housing with black, powder-coat finish
- Includes universal bail bracket and mounting hardware



LS-100 100W SIREN SPEAKER

▶ DASH / DECK LIGHTING


TDXL6 - TITAN 6 LED DASH



GENERAL SPECIFICATIONS

- **Flash Patterns:** 19
- **Input Voltage:** 11 - 30 Vdc
- **Current Draw:** 0.46A @ 12.8Vdc - 0.24A @ 25.6Vdc
- **LED Count:** 6
- **Dimensions:** 5.1"D x 1.77"H x 6.8"W (including mounting tabs)
- **Certificates:** SAE J595, CA Title 13
- **Mount:** Windshield / suction cups
- **Colors:** Amber, Blue, Red, White & most split-color combinations

FEATURES



BENEFITS

- Adjustable light module adapts to different windshield angles
- Xtreme linear optics


XMMAX206P 12 LED DASH / DECK LIGHT



GENERAL SPECIFICATIONS

- **Flash Patterns:** 26
- **Input Voltage:** 24 Vdc
- **Current Draw:** 0.8A @ 12 Vdc
- **LED Count:** 12
- **Dimensions:** 4.6"D (w/ shroud) x 1.54"H x 9.5"W
- **Certificates:** SAE J595
- **Mount:** Windshield / suction cups, headliner, side mounted mini L brackets
- **Colors:** Amber, Blue, Red, White and most combinations

FEATURES



BENEFITS

- Alternative mounting options (headliner, side-mount suction cups, side-mount L brackets)
- Multiple user-selectable flash patterns

MBMMAX2H HEADLINER BRACKET



GENERAL SPECIFICATIONS

- **Mount:** Black powder-coated aluminum headliner bracket

BENEFITS

- Universal design allows for mounting in virtually any vehicle
- Opens up windshield for better visibility
- Height / angle adjustable

VS-DC2 TRANSPORT SEATS

▶ PRISONER TRANSPORT EQUIPMENT

WINDOW BARS



- RWB-DC2:* **2011+ DODGE CHARGER**
- RWB-FIS:* **2013+ FORD INTERCEPTOR SEDAN**
- RWB-FIU:* **2015+ FORD EXPLORER**
- RWB-CT:* **2007-14 CHEVROLET TAHOE**

GENERAL SPECIFICATIONS

- 11-gauge, powder-coated steel

FEATURES

- Horizontal bar design for better visibility
- Aids in reducing expensive kick-outs from within the vehicle
- Horizontal bars accommodate various surface mount LED lightheads
- Provides increased safety for officers and civilians alike
- One piece design facilitates quick installation, reducing vehicle downtime
- Clean, finished look

Warranty: 2-year

RWB-DC2 WINDOW BARS

DOOR PANEL COVERS



DP-DC2: **2011+ DODGE CHARGER**

DP-FIS: **2013+ FORD INTERCEPTOR SEDAN**

DP-FIU: **2013+ FORD EXPLORER**

GENERAL SPECIFICATIONS

- Vacuum-formed, UV-stabilized, flame-retardant ABS plastic

FEATURES

- Vacuum-formed to match the exact contour of factory door panel, preserving the factory OEM look.
- Protects factory finishings / reduces tampering
- Eliminates time and space-consuming storage of factory door panels
- Quick and easy installation

Warranty: 2-year

TRANSPORT SEATS



VS-FIU Transport Seat Cover

VS-DC2: **2011+ DODGE CHARGER**

VS-FIS: **2013+ FORD INTERCEPTOR SEDAN**

VS-FIU: **2015+ FORD EXPLORER (FITS OVER FACTORY SEAT & SEAT BACK)**

GENERAL SPECIFICATIONS

- 1/4" vacuum-formed, UV-stabilized, flame-retardant ABS plastic

FEATURES

- Reduce the risks associated with stashing of contraband
- Each seat is cut using a C&C program ensuring the perfect fit every time
- VS-FIU and CT2 cover the factory seat. No removal or storage of factory parts necessary
- Facilitates safer, easier clean up
- More resistant to pathogens and biohazards than factory seats when cleaned regularly
- Aids in preservation of vehicle's value
- Pre-drilled mounting holes located in areas free of factory wire harnesses and / or gas tank
- Utilizes factory seat belt system or use **optional PT-SBE seat belt extenders**

Warranty: 2-year



PT-SBE SEATBELT EXTENSION

▶ G6


G6 6 HEAD



GENERAL SPECIFICATIONS

- **Flash Patterns:** 19 | **Input Voltage:** 12 Vdc
- **Current Draw:** 1.6A @ 12Vdc | **Sync:** 15+ Units | **LED Count:** 18
- **Dimensions:** 16.7"L X 2.9"H X 6.3"D | **Colors:** Amber, Blue, Red, White
- **Certificates:** SAE J845 Class 1, CA Title 13
- **Colors:** Amber, Blue, Red, White

FEATURES



BENEFITS

- 6 super-bright reflector LED modules
- Fluted / optical dome
- Mounts: Magnetic, Vacuum Magnet, Permanent Mount (low-profile & high profile)
- Magnet Mount versions come with a fused, dual-switch cigar plug

▶ FALCON SERIES


F84 8 HEAD XTREME LINEAR



GENERAL SPECIFICATIONS

- **Flash Patterns:** 26 | **Input Voltage:** 12 Vdc
- **Current Draw:** 2.6A @ 12.8Vdc | **Sync:** 15+ Units | **LED Count:** 40
- **Dimensions:** 17"L X 2.6"H X 11"D | **Colors:** Amber, Blue, Green, Red, White, Green
- **Certificates:** SAE J845 Class 1, CA Title 13

FEATURES



BENEFITS

- 8 Xtreme Linear LED modules
- Unique Octoganal Design produces True 360° Output
- Mounts: Magnetic, Vacuum Magnet, Permanent Mount (low-profile & high profile)
- Magnet Mount versions come with a fused, dual-switch cigar plug

FE3 10 HEAD



GENERAL SPECIFICATIONS

- **Flash Patterns:** 26 | **Input Voltage:** 12 - 24 Vdc
- **Current Draw:** 2.65A @ 12.8Vdc - 1.31A @ 24Vdc | **Sync:** 15+ Units | **LED Count:** 30
- **Dimensions:** 17"L X 2.6"H X 11"D | **Colors:** Amber, Blue, Red, White
- **Certificates:** SAE J845 Class 1, CA Title 13

FEATURES



BENEFITS

- 10 Con-Optic LED modules
- Unique octagonal design produces true 360° output
- Mounts: Magnetic, Vacuum Magnet, Permanent Mount (low-profile & high profile)
- Magnet Mount versions come with a fused, dual-switch cigar plug

▶ MICROBAR SERIES


MB30 10 HEAD



GENERAL SPECIFICATIONS

- **Flash Patterns:** 23 | **Input Voltage:** 12 - 24Vdc
- **Current Draw:** 2.5A @ 12Vdc - 1.25A @ 24Vdc | **Sync:** 15+ Units | **LED Count:** 30
- **Dimensions:** 9.76"L X 1.45"H X 6.77"D | **Colors:** Amber, Blue, Green, Red, White
- **Certificates:** SAE J845, CA Title 13, ECE R65

FEATURES



BENEFITS

- 10 High-Powered LED Modules
- Compact, low-profile design - easy to transfer between vehicles
- Mounts: Magnetic (w/ suction boot), permanent (low profile)
- Magnet Mount versions come with a fused, dual-switch cigar plug


L05 MB-EX 14 HEAD



GENERAL SPECIFICATIONS

- **Flash Patterns:** 24 | **Input Voltage:** 12 - 24Vdc
- **Current Draw:** 3.1A @ 12Vdc - 1.55A @ 24Vdc | **Sync:** 15+ Units | **LED Count:** 42
- **Dimensions:** 15.74"L X 1.45"H X 6.77"D | **Colors:** Amber, Blue, Green, Red, White
- **Certificates:** SAE J845, CA Title 13, ECE R10 / R65

FEATURES



BENEFITS

- 14 High-Powered LED Modules
- Compact, low-profile design - easy to transfer between vehicles
- Available In Magnetic, Suction Magnet Or Permanent Mount
- Mounts: Magnetic (w/ suction boot), permanent (low profile)
- Magnet Mount versions come with a fused, dual-switch cigar plug

L07 MB-EXD DUAL COLOR 6 HEAD



GENERAL SPECIFICATIONS

- **Flash Patterns:** 24 | **Input Voltage:** 12 - 24Vdc
- **Current Draw:** 3A @ 12Vdc - 1.5A @ 24Vdc | **Sync:** 15+ Units | **LED Count:** 72
- **Dimensions:** 15.74"L X 1.45"H X 6.77"D | **Colors:** Amber, Blue, Red, White (Choose Up To 3)
- **Certificates:** SAE J845

FEATURES



BENEFITS

- 6 High-Powered LED Modules - 12 interleaved LED's per module
- Compact, low-profile design - easy to transfer between vehicles
- Color Changing: Switch from one color mode to another on the fly
- Mounts: Magnetic (w/ suction boot), permanent (low profile)
- Magnet Mount versions come with a fused, dual-switch cigar plug

WLC-506FB-D7
6 LED WORK LAMP

FLOOD / SCENE LIGHTING



WLD-6B074-00 4 LED WORK LAMP



GENERAL SPECIFICATIONS

- **Input Voltage:** 11 - 70 Vdc
- **Max Current Draw:** 2.2A @ 12.8Vdc - 1.2A @ 25.6Vdc - 0.5A @ 60Vdc
- **LED Count:** 4 | **LED Output:** 3200lm
- **Dimensions:** 4.9" L X 5.1"H (With Bracket) X 3.2"D
- **Certificates:** EMC, IP68
- **Mounts:** U Bracket / Bayonet

FEATURES



BENEFITS

- Multi-voltage input
- Heavy-duty, powder-coated, die-cast aluminum housing
- Wide flood beam
- Waterproof Deutsch™ brand connectors

WLE-6B076-00 6 LED WORK LAMP



GENERAL SPECIFICATIONS

- **Input Voltage:** 11 - 70 Vdc
- **Max Current Draw:** 3.6A @ 12.8Vdc - 1.8A @ 25.6Vdc - 0.8A @ 60Vdc
- **LED Count:** 6 | **LED Output:** 4800lm
- **Dimensions:** 6.1" L X 6.9"H (With Bracket) X 3.2"D
- **Certificates:** EMC, IP68
- **Mounts:** U Bracket / Bayonet

FEATURES



BENEFITS

- Multi-voltage input
- Heavy-duty, powder-coated, die-cast aluminum housing
- Wide flood beam
- Waterproof Deutsch™ brand connectors

WLC-506FB-D7 6 LED WORK LAMP



GENERAL SPECIFICATIONS

- **Input Voltage:** 10 - 70 Vdc | **Max Current Draw:** 2A @ 12.8Vdc - 0.9A @ 25.6Vdc
- **LED Count:** 6 | **LED Output:** 1900lm
- **Dimensions:** 4.6" L X 5.6"H (With Bracket) X 2.6"D
- **Certificates:** EMC, IP67
- **Mounts:** U Bracket / Bayonet

FEATURES



BENEFITS

- Multi-voltage input
- Heavy-duty, powder-coated, die-cast aluminum housing
- Wide flood beam

WLB-506FB-D7 6 LED WORK LAMP



GENERAL SPECIFICATIONS

- **Input Voltage:** 10 - 70 Vdc | **Max Current Draw:** 2A @ 12.8Vdc - 0.9A @ 25.6Vdc
- **LED Count:** 6 | **LED Output:** 1900lm
- **Dimensions:** Diameter: 4.6" - Height W/ Bracket: 5.7" - Depth: 2.6"
- **Certificates:** EMC, IP67
- **Mounts:** U Bracket / Bayonet

FEATURES



BENEFITS

- Multi-voltage input
- Heavy-duty, powder-coated, die-cast aluminum housing
- Wide flood beam

BXLEDB 10 LED SCENE LIGHT



GENERAL SPECIFICATIONS

- **Input Voltage:** 10 - 30 Vdc | **Max Current Draw:** 1.2A @ 12.8Vdc - 0.6A @ 25.6Vdc
- **LED Count:** 10
- **Dimensions:** 6.3" L X 3.1"H X 2.2"D (w/o angled box bracket)
- **Certificates:** EMC, IP68
- **Mounts:** Surface mount with or without powder coated steel, angled box bracket

FEATURES



BENEFITS

- Multi-voltage input
- Heavy-duty, powder-coated, die-cast aluminum housing
- Produces softly spread, non-blinding yet effective scene lighting

WLH-1B031-00 4 LED ECONOMY WORK LAMP



GENERAL SPECIFICATIONS

- **Input Voltage:** 12 - 24 Vdc | **Max Current Draw:** 0.6A @ 12Vdc - 0.3A @ 25.6Vdc
- **Illumination:** Flood | **LED Count:** 4 | **LED Output:** 500lm
- **Dimensions (W/ Bracket):** 3.3"L X 3.5"H X 1.1"D
- **Certificates:** EMC
- **Mounts:** U Bracket / Bayonet

FEATURES



BENEFITS

- Multi-voltage input
- Heavy-duty, powder-coated, die-cast aluminum housing
- Wide flood beam

WLG-1B051-00 4 LED WORK LAMP



GENERAL SPECIFICATIONS

- **Input Voltage:** 10 - 70 Vdc | **Max Current Draw:** 1.2A @ 9Vdc - 0.2A @ 50Vdc
- **LED Count:** 4 | **LED Output:** 900lm
- **Dimensions: Diameter:** 3.78" - Height W/ Bracket: 4.65" - Depth: 2.9"
- **Certificates:** EMC, IP68
- **Mounts:** U Bracket / Bayonet

FEATURES



BENEFITS

- Multi-voltage input
- Heavy-duty, powder-coated, die-cast aluminum housing
- Wide flood beam



▶ BEACONS

GENERAL SPECIFICATIONS FOR B14, B15, B16, AND B17

- **SYNC:** 15+ units
- **Mount:** Flat / Pipe, Magnetic
- **Colors:** Amber with amber dome

FEATURES



B14 10 LED (3W)



GENERAL SPECIFICATIONS

- **Flash Patterns:** 11
- **Input Voltage:** 12 - 24 Vdc
- **Current Draw:** 1.7A @ 12.8Vdc - 0.88A @ 24Vdc
- **Dimensions:** 5.04" dome w/ base H x 5.6" base diameter
- **Certificates:** Class I, SAE J845, CA Title 13, ECE R10 / R65

B15 8 LED (1W)



GENERAL SPECIFICATIONS

- **Flash Patterns:** 15
- **Input Voltage:** 12 - 24 Vdc
- **Current Draw:** 1.25A @ 12.8Vdc - 0.63A @ 24Vdc
- **Dimensions:** 6.25" dome w/ base H x 6.6" base diameter
- **Certificates:** Class I, SAE J845

B16 8 LED (3W)



GENERAL SPECIFICATIONS

- **Flash Patterns:** 11
- **Input Voltage:** 12 - 24 Vdc
- **Current Draw:** 1.2A @ 12.8Vdc - 0.7A @ 24Vdc
- **Dimensions:** 3.15" dome w/ base H x 5.59" base diameter
- **Certificates:** Class I, SAE J845, CA Title 13, ECE R10 / R65

B17 8 LED (1W)



GENERAL SPECIFICATIONS

- **Flash Patterns:** 15
- **Input Voltage:** 10 - 30 Vdc
- **Current Draw:** 0.55A @ 12.8Vdc - 0.3A @ 24Vdc
- **Dimensions:** 4.88" dome w/ base H x 6.6" base diameter
- **Certificates:** Class I, SAE J845

BEACONS

GENERAL SPECIFICATIONS FOR JB45L6, JB106L3-DOA, AND JB103L3-DOA,

- Flash Patterns: 1 (ultra 8, 45 FPM)
- Input Voltage: 11 - 110 Vdc
- SYNC: No
- Colors: Amber

FEATURES



JB45L6 6 LED



GENERAL SPECIFICATIONS

- Current Draw: 0.24A @ 12.8Vdc - 0.14A @ 110Vdc
- LED Count: 6
- Dimensions: 4.92" dome w/ base H x 5.9" base diameter
- Mount: Flat / Pipe, Magnetic

JB106+L3 3 LED



GENERAL SPECIFICATIONS

- Input Voltage: 11 - 110Vdc
- Current Draw: 0.2A @ 12Vdc - 0.07A @ 110Vdc
- LED Count: 3 (1W)
- Dimensions: 5.19" dome w/ base H x 3.86" base diameter
- Mount: Flat Surface / Permanent, Magnetic
- Certificates: SAE Class II / III

JB130L3 3 LED



GENERAL SPECIFICATIONS

- Input Voltage: 11 - 110Vdc
- Current Draw: 0.12A @ 12.8Vdc - 0.08A @ 110Vdc
- LED Count: 6
- Dimensions: 3.86" dome w/ base H x 5.12" base diameter
- Mount: Flat Surface / Permanent, Magnetic
- Certificates: SAE Class II / III

BR-LEDBH 8 LED



GENERAL SPECIFICATIONS

- Flash Patterns: 15
- Input Voltage: 12 - 24Vdc
- Current Draw: 1.2A @ 12Vdc - 0.6A @ 24Vdc
- LED Count: 8
- Dimensions: 6.75"H x 6.5"
- Mount: Flat surface
- Certificates: Class I, SAE J845 / J578
- Colors: Amber, Blue, Green, Red, Clear (white) - LEDs match dome color

FEATURES



► CIRCUIT BREAKERS

CB-50, 100 & 150 MANUAL RESET CIRCUIT BREAKERS



FEATURES

- Available in 50A, 100A & 150A
- Manual "trip" button allows the user to manually trip the breaker
- Indicator lever provides clear visual indication of a tripped condition saving valuable time when troubleshooting an open circuit
- Rubber stud covers

GENERAL SPECIFICATIONS

- Operating temperature: -25°F to 180°F.
- Storage temperature: -30°F to 300°F.
- Splash and dust-proof.
- Stud size 1/4", 28 threads per inch.

► POWER DISTRIBUTION PANEL

PDP-13 POWER DISTRIBUTION PANEL




FEATURES

- Maximum Load (panel): 100 AMP
- Maximum Load (per circuit): 30A
- Operating Voltage: 12V DC
- 5 Battery Power Circuits
- 5 Ignition Power Circuits
- 3 Timed Circuits
- Timer Presets - .5 hr, 1 hr, 2hrs, 4hrs
- 8 Ground Studs
- Fuse Indicator LED - turns on when there is an open circuit or blown fuse
- Timed Circuit LED - LED flashes during power shut-off countdown

PDP-16 POWER DISTRIBUTION PANEL (COMING SUMMER 2018)

FEATURES

- 3 timers deleted - 6 inputs added for a total of 8 driver & 8 ignition. Overall dimensions remain unchanged.

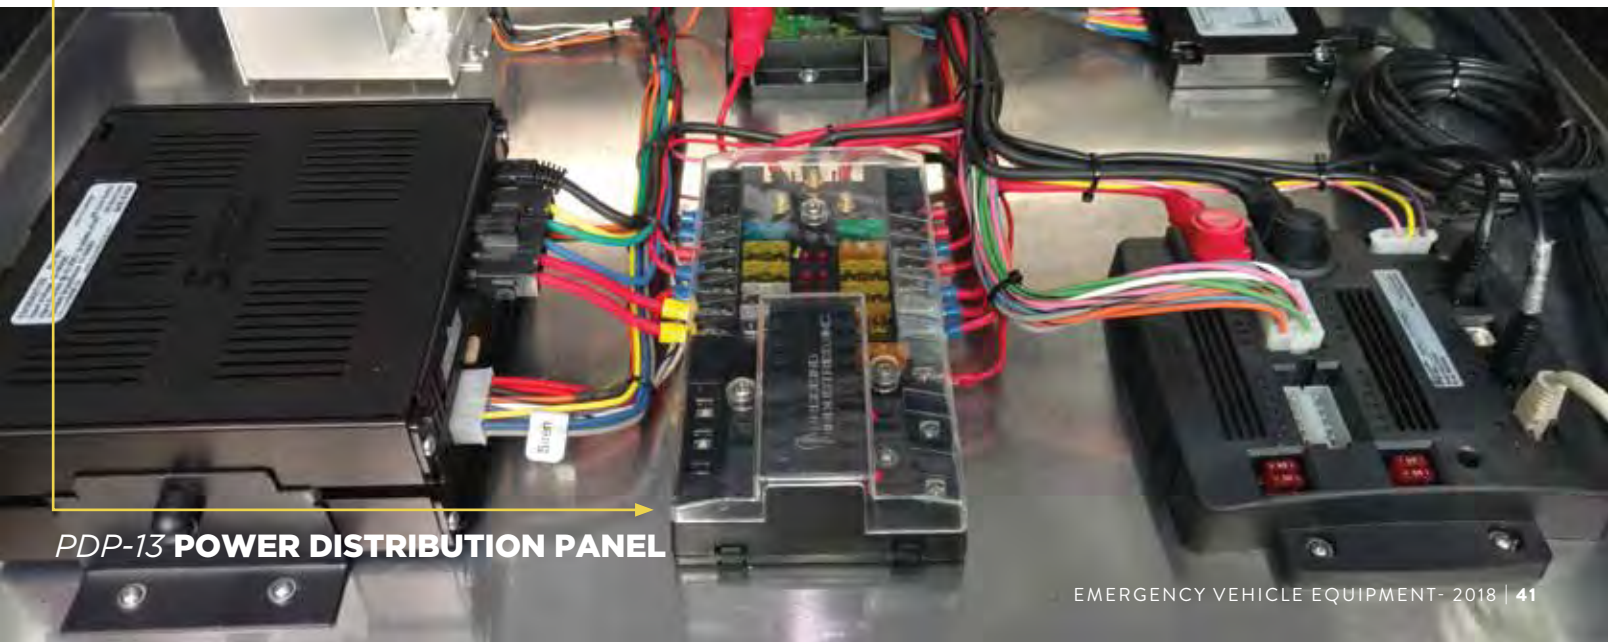

PDP-13 POWER DISTRIBUTION PANEL

► FUSE BLOCKS

*FP***-PLC FUSE BLOCK W/ LED FUSE STATUS INDICATORS



FEATURES

- Available in 4, 6 & 10 gang
- Red LED's indicate blown fuse
- Clear, poly snap-on cover for extra protection against water spray, dust and debris
- 1/4" stud for power feed
- .250" male quick-disconnect terminals

GENERAL SPECIFICATIONS

- Input voltage: 10 - 32 Vdc
- Max 30A per circuit / 100A per panel

*FP***-GPC FUSE BLOCK WITH GROUND PAD



FEATURES

- Available in 8, 10 & 12 gang
- Easy wiring with 1/4" quick connect branch circuit terminal and stud common ground or 1/4" quick connect if preferred
- Clear poly snap-on cover for extra protection against water spray, dust and debris
- 1/4" stud for power feed
- .250" male quick-disconnect terminals

► OVERHEAD LED DOME LIGHT

PL-RWO DOME LIGHT



FEATURES

- Choose red or white illumination mode.
- Color modes are on each side of the 3-position on/off switch, allowing activation of either without cycling through the other.
- Red mode is less visible from outside the vehicle, aiding in officer / driver safety, while also reducing eye fatigue.
- Dimensions: 6.34" Diameter x 1"H

► TWY-LIGHT

TWY (TAKE WITH YOU) VERSATILE CLIP-ON ILLUMINATION DEVICE



FEATURES GENERAL SPECIFICATIONS

- (12) flashing LED's
- (1) steady white LED on one end
- 360 degree rotating clip. Clip it on just about anything from clothes to an inanimate object (traffic cone).
- 6 hours run time on a full charge
- Water resistant
- Colors: Amber, Blue, Red, White and most combinations

▶ HARD SEAT ORGANIZER

BR-017 SEAT ORGANIZER



FEATURES

- Blow-molded, low-density polyethylene material
- Supplies stay secure even at high speeds
- Secures forms, maps, flashlights, handcuffs and other equipment for fast, easy access
- Adjustable brackets fit virtually any seat
- Built in handle allows for easy transport

▶ BODY ARMOR HANGER

BR-BAH BODY ARMOR HANGER



FEATURES

- Hang drying aids in preservation of body armor / ballistic vests, greatly reducing unpleasant odor and / or mold growth
- Heavy-duty swivel hanging hook
- Hooked hanger ends prevent slippage
- Hanging tab for duty belt
- Constructed of high-impact ABS plastic

▶ BACK-UP ALARM

BR-102DBA BACKUP ALARM



GENERAL SPECIFICATIONS

- **Max Power:** 15W
- **Input Voltage:** 12-80Vdc
- **Current:** 300mA
- **dB/M:** 102 Db
- **Material:** Nylon
- **Frequency:** 1.4KHz
- **Cycle:** 80 ± 5/min
- **Dimensions:** 4.1"L x 1.8"D x 1.97"H

▶ OUTLET BOXES

BR-930 OUTLET BOX (12V)



GENERAL SPECIFICATIONS

- ABS plastic housing / case
- 15A per outlet
- 4.5"L x 1.5"H x 2"D

FEATURES

- Three 12V DC receptacles
- Lighted switch turns all 3 receptacles on/off
- Attached rubber covers help keep receptacles free and clear of debris and/or liquids
- Mounting holes extend through the plastic housing allowing for easier mounting in tight spaces
- Receptacles protected by a 15A in-line fuse
- 3' wire harness
- Mounting screws included

Warranty: 3-year

BR-930-USB OUTLET BOX (12V)



GENERAL SPECIFICATIONS

- ABS plastic housing / case
- 15A per outlet | 2.1A USB ports
- 4.5"L x 1.5"H x 2"D

FEATURES

- Two 12V DC receptacles and two USB ports
- Lighted switch turns all 3 receptacles on/off
- Attached rubber covers help keep receptacles free and clear of debris and/or liquids
- Mounting holes extend through the plastic housing allowing for easier mounting in tight spaces
- Receptacles protected by a 15A in-line fuse
- 3' wire harness
- Mounting screws included

Warranty: 3-year

OP-5302 USB OUTLET PLATE (12V)



FEATURES

- Two USB ports
- Three 12V receptacles
- Receptacles / ports protected by 15A in-line fuse
- Attached rubber covers keep receptacles clear of liquids and debris
- Powder-coated steel plate
- Dimensions: 8.56"L x 2"H

Warranty: 3-year

Promote your business, add your logo / company information with reasonable minimums. Contact a Brooking associate for more details.

BR-930W OUTLET BOX (12V)



GENERAL SPECIFICATIONS

- ABS plastic housing / case
- 15A per outlet
- 6" L x 1.5" H x 2.25" D (length includes mounting flanges, depth includes circuit breaker)

FEATURES

- 3 12V DC receptacles
- Attached rubber covers help keep receptacles free and clear of debris and/or liquids
- Receptacles protected by a 15A auto-resetting circuit breaker
- 3' wire harness
- Mounting screws included

Warranty: 3-year

BR-930WP OUTLET BOX (12V)



GENERAL SPECIFICATIONS

- ABS plastic housing / case
- 15A per outlet
- 6" L x 1.5" H x 2.25" D (length includes mounting flanges)

FEATURES

- Three 12V DC receptacles
- Powered via fused (15A) cigar plug
- Attached rubber covers help keep receptacles free and clear of debris and/or liquids
- 3' cigar plug cord
- Mounting screws included

Warranty: 3-year

OP-40 OUTLET PLATE (12V)



FEATURES

- Four 12Vdc receptacles
- Receptacles protected by 15A in-line fuse
- Attached rubber covers keep receptacles clear of liquids and debris
- Powder-coated steel plate
- Dimensions: 8.56" L x 2" H

Warranty: 3-year



Your Emergency Vehicle Equipment Super Source

104 Liberty Center Place, St. Augustine, FL 32092

Brooking Industries' roots trace back to Lexington, KY. In 1985, we established a relationship with the nation's largest public safety equipment retailer, for whom Brooking developed and produced a privately labeled line of switchboxes and accessories. Over the years, Brooking expanded its manufacturing capabilities by partnering with a thermoplastics engineer, and developing a line of prisoner transport equipment that is now recognized as the best fitting and most affordable line in the industry. By 1995 Brooking had established its own direct-purchasing customer base in the southeastern United States, and became known as a reliable supplier with favorable pricing, lead times, and personalized customer service.

By the new millennium, Brooking's O.E.M.-type projects (custom wiring harnesses, etc.) facilitated penetration into other markets, but the primary focus remained in the emergency vehicle realm. It was at this time that Brooking, driven by the desire to become a "one-stop shop," decided to round out its offerings by introducing a lighting line that has become widely known as a superior option compared to other lighting manufacturer products. The latest contribution Brooking has to offer the emergency vehicle marketplace is an innovative and rapidly growing line of plug & play headlight and tail-light flashers.

These innovations, along with the prisoner transport equipment, lighting, and lighting control options, have allowed Brooking to supply effective and affordable options that are supported by industry standard (or better) warranties with personable customer service. When you partner with Brooking you are not a number, you are part of the family. Welcome aboard.

YOUR LOCAL DEALER



888.439.1925

www.BrookingIndustries.com