

VOICE DOWN

EYES & EARS WHILE YOU'RE AWAY

The Action-CS Indoor Voice Down adapter allows for easy and seamless integration of speakers, strobe lights, and a microphone housing.



PATENT PENDING

This adapter can be ceiling mounted onto new or existing IP cameras to enhance and update the security functionality of the property. With no additional wiring needed to power this device, only the camera's existing CAT5E/6 cable is necessary to power this voice down and control it while providing power to the existing camera via POE.

You can now trigger lights and audio by events through your NVR or manually through your NVR and have two-way or one-way communication through a camera location. This greatly enhances your security and deters any would be criminal activity from occurring. You have the ability to trigger strobe lights and communicate with a perpetrator through a camera location with ease by using their already installed and native NVR system.

Go live with a few simple steps!

Simply mount the camera to the voice down

01

Plug in the network cable from the camera to the voice down adapter

02

Then plug in the original CAT5E/6 cable into the voice down input

03


Hook up the audio and alarm outputs and you are live!

04

INDOOR VOICE DOWN

SPECIFICATIONS

Sound	1 x 60 watt stereo amp output to 4 speakers
Lights	(3) 18 watt LED red/blue strobe lights with (6) 3 watt LEDs
Microphone	(1) Omni-directional condenser mic
Dimensions	6.0" X 5.9" X 5.3" (HxWxD)
Casing	Aluminum powder coated (optional custom colors with min order of 10 units)
Housing	For indoor environments only
Power	POE++ powered with POE pass through to the camera
Camera Output Requirements	MIC, RJ45 POE
Camera Input Requirements	Alarm out, 3.5mm audio, 2 - wire audio terminal

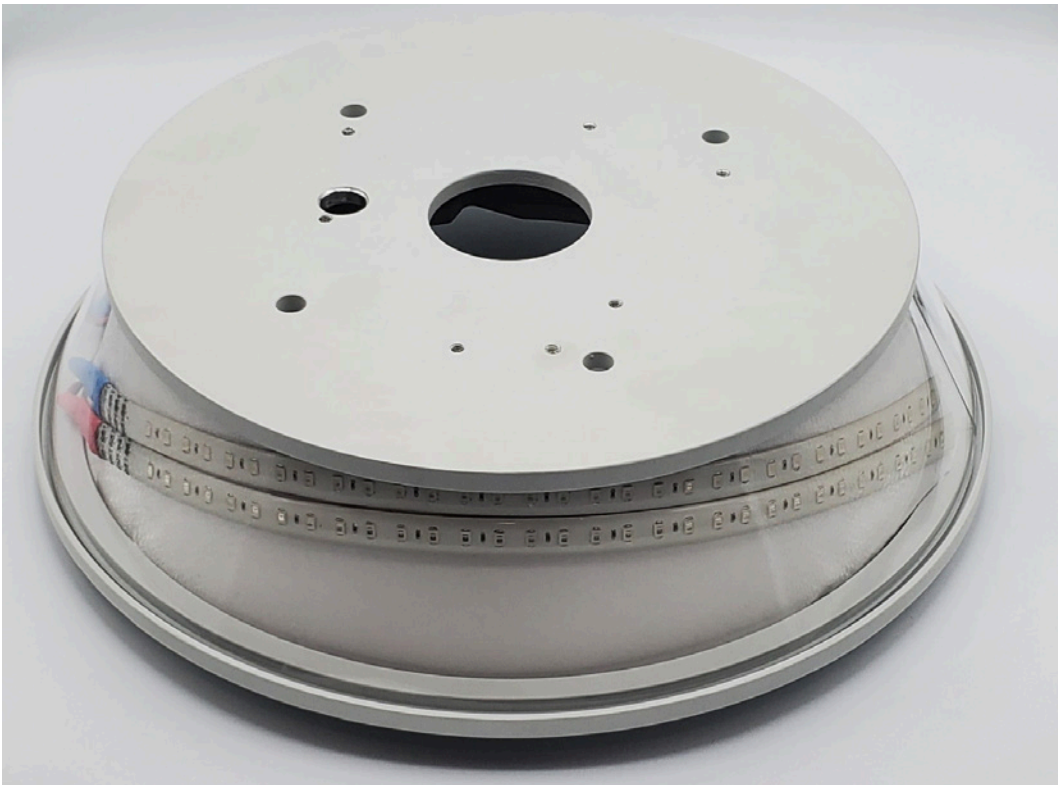

PATENT PENDING