

Bayside Marine Construction Inc.

77505 Coon Creek Rd.
Armada, MI 48005
Ph: 586-784-8262

Estimate


To: Indian Lake Association
From: Joe Bastien
Date: 1-26-10

Bayside Marine Construction Inc., will provide the following materials and services:


Description	Totals
Build a 10x65 foot removable dock with the following: a) 4x4 inch steel angle & 4x4 tube. b) 2x8 and 2x6 treated lumber c) 2 new ladders	
	Total \$11,400
A. Down payment \$2,240 (paid)	-\$2,240
B. Upon acceptance materials and assembly deposit	-\$3,660
C. Removal of old dock & pilings from property	-\$1,500
D. Assembled dock complete & painted	-\$3,000
E. Install new dock	-\$1,000 final

Notes

All fasteners to be hot dipped galvanized. To install or remove dock if required is \$450.00 each time. Bayside will be painting the complete frame of the dock for \$500.00, including paint. Bayside's work is guaranteed for 5 years. Per conversation with Lou Brown the 6 longer legs will have gussets including cross gussets under the dock.


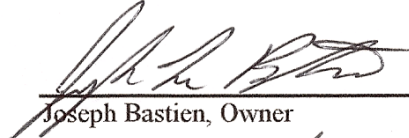
 01/27/2010

Joseph Bastien, Owner Date

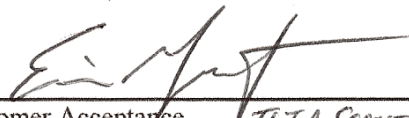 1/27/2010


Customer Acceptance ILIA SECRETARY Date


WATER END OF DOCK TO BE AT SAME LOCATION PE 27 JAN
NORTH SIDE OF DOCK TO MATCH EXISTING PE 27 JAN

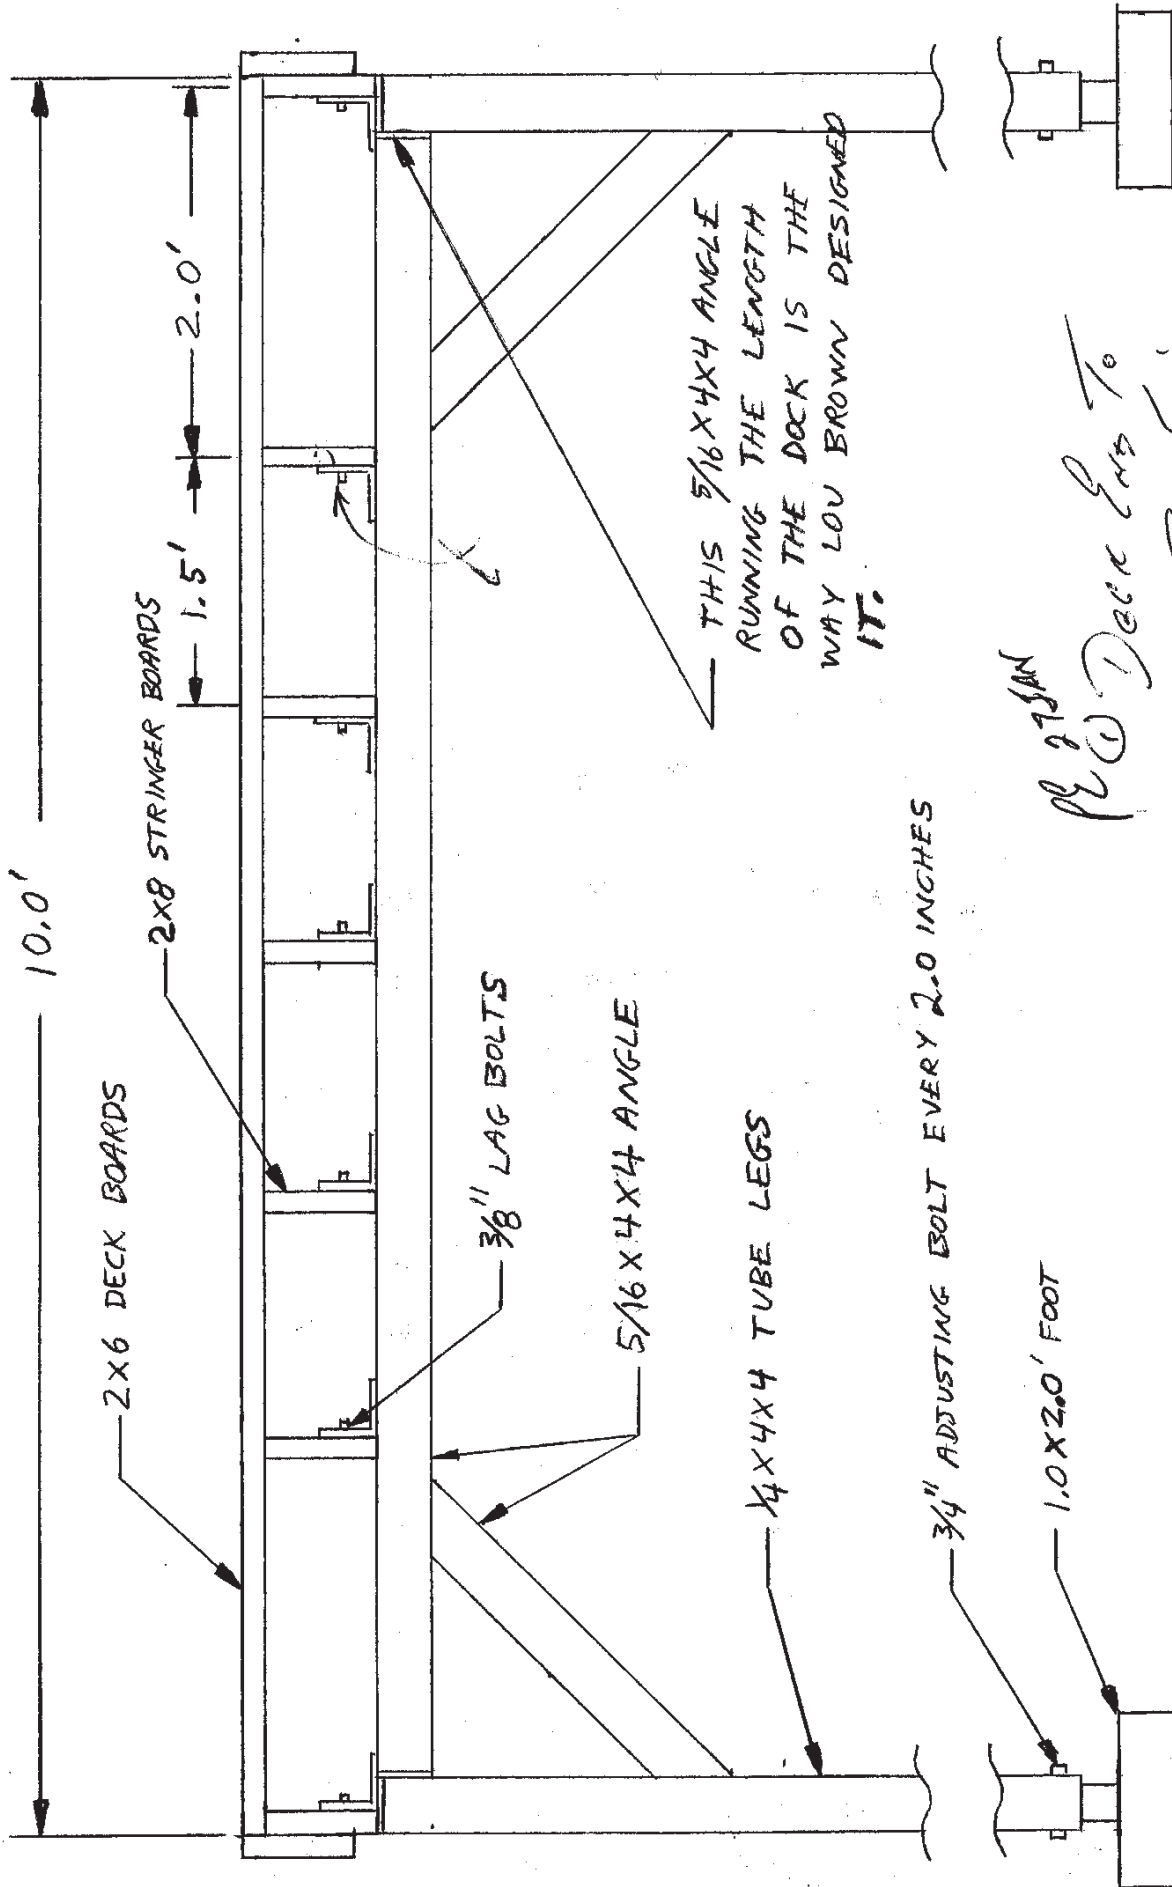

PL 275AN
 PL 275AN Deck Legs To
 Base For Fabric. 2x10

HEIGHT FROM WARE
 SHIP TO SIDE 4" DIFF
 LENGTH 12' 0" DIFF
 PL 275AN



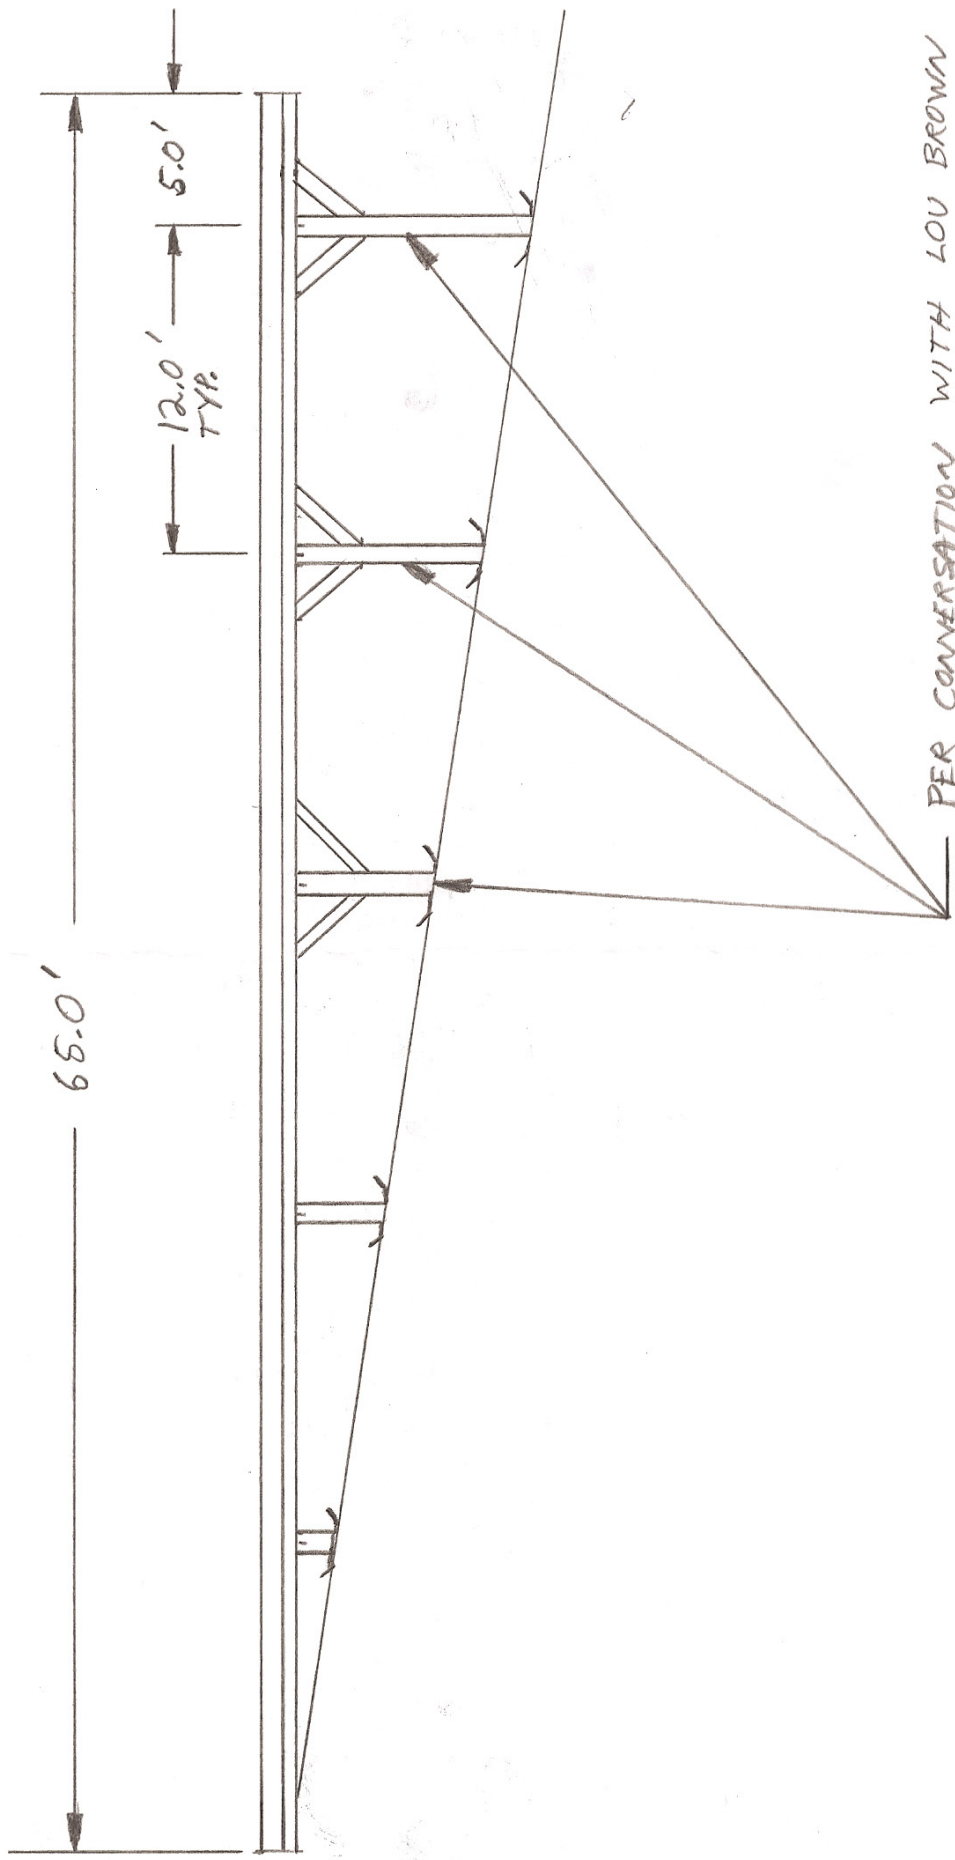

PER CONVERSATION WITH LOU BROWN
THESE 6 LEGS WILL HAVE GUSSETS
INCLUDING THE CROSS GUSSETS
UNDER DOCK.

12. STEIN

PR 27 JAN

END 3 LEGS ON
EACH SIDE

SIDE VIEW
OF LEG

1.0 FEET ADJUSTMENT
EVERY 2.0 INCHES.

