


TF POWERED FULL TILT

STANDARD CONFIGURATION SPECS

THESE ARE THE DEFAULT SPECS THAT ARE INCLUDED IN THE BASE CONFIGURATION OF THIS MODEL.

Deck Width: 83" (74" Wide Tilt Deck)	Deck Height: 22"	Axles: Tandem Torsion (2 x 7,000 lb.)	Choose the optional Blackwood Pro decking for added durability and grip when wet.
Length: 18' - 24'	Couplers: Bumper Pull, Gooseneck, & Pintle	Load Capacity: 9,420 - 10,080 lbs.	
GVWR: 14,000 lbs.	Weight: 3,920 - 4,580 lbs.	Tilt Angle: 11°	

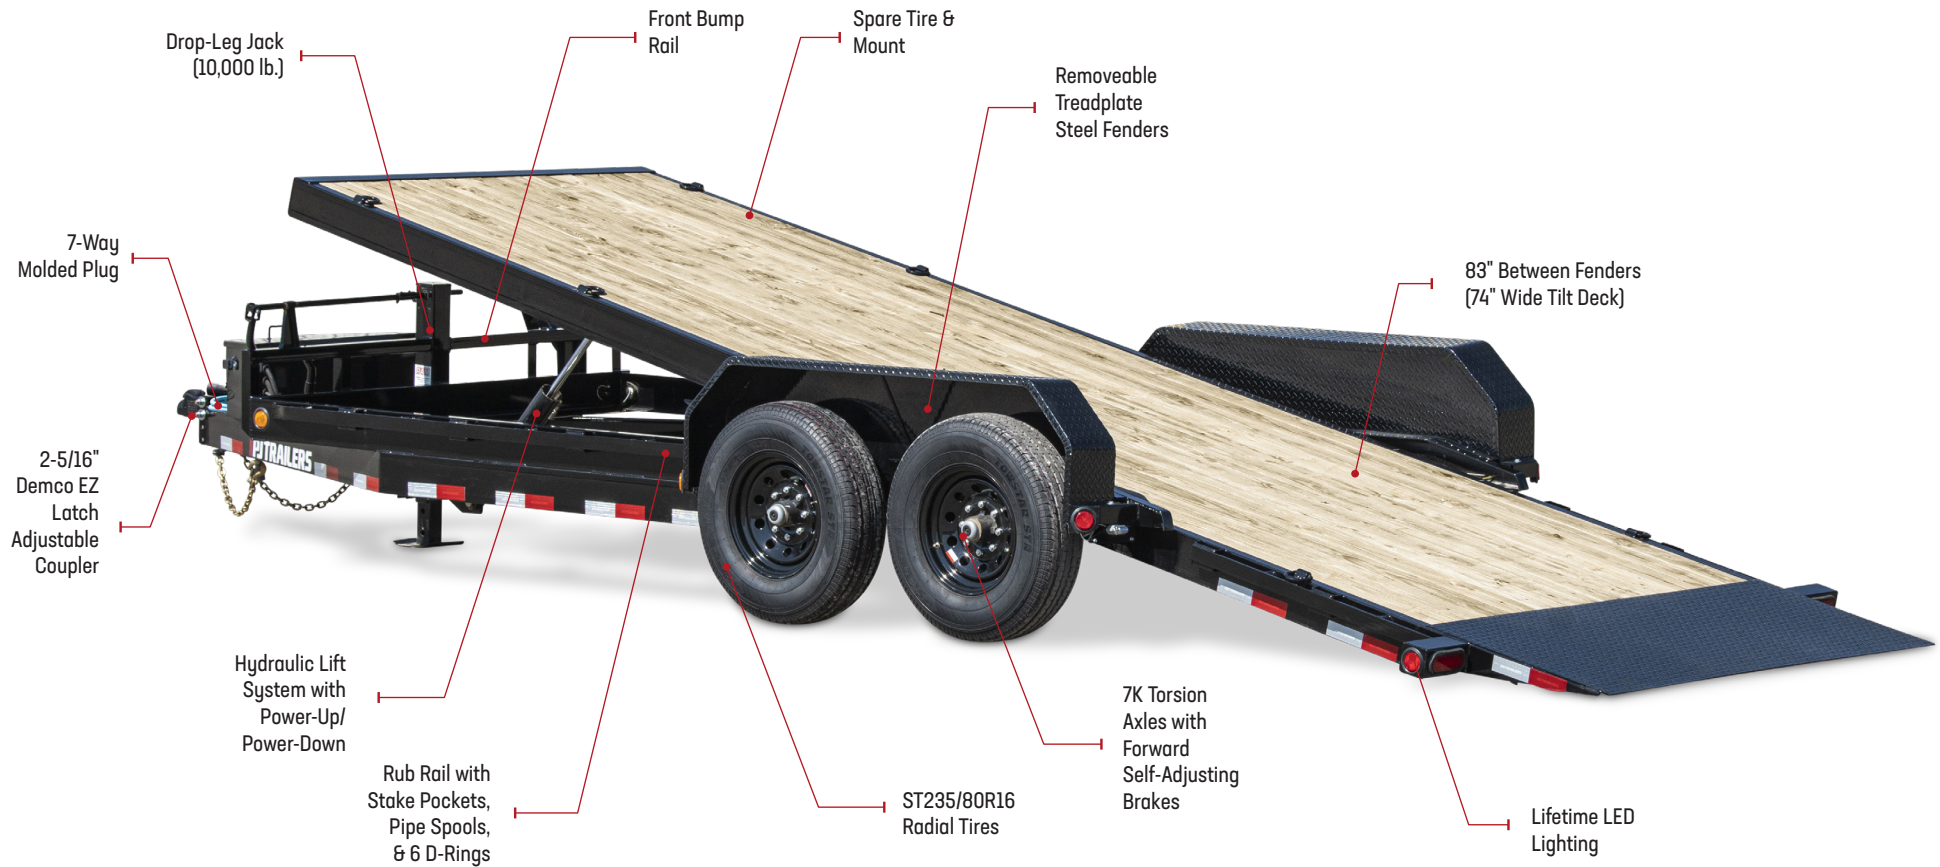

Our Dual Ram Hydraulic powered system gives you additional stability and control over the precise up and down movement of the bed for additional ease of use and loading/unloading flexibility.

HYDRAULIC POWERED TILT DECK



Simplify brake maintenance with our Forward Self-Adjusting Brakes, engineered to self-adjust for optimal braking performance. This innovative system reduces downtime and ensures consistent stopping power.

FORWARD SELF-ADJUSTING BRAKES



Benefit from enhanced cargo securement with our standard full-length Rubrail and stake pockets. In addition to the built-in stake pockets, the Rubrail provides extra attachment points for securing your load. Customize your trailer further by adding optional D-rings.

CARGO CONTROL STANDARD



Our 30\"/>

KNIFE EDGE TAIL