

DEWALT®

**BUILT TO
CLEAN
MADE TO
LAST**

**WET/DRY VACUUMS,
DRUM FANS
& AIR MOVERS
2023 CATALOGUE**



GUARANTEED TOUGH.®



THE MOST POWERFUL VACUUMS AND AIR MOVERS

The DEWALT Wet/Dry Vacuum is equipped with a quick-connect locking hose system for a secure and easy connection. It also features high-performance rubberized non-marring casters that enable smooth movement on any surface. To ensure easy transportation to job sites, the vacuum is designed with a large fixed handles that double as a cord wrap. With the exclusive Clean and Connect™ filter system, only available on DEWALT Wet/Dry Job Site Vacuums, professionals can quickly and easily change filters without the need for screws or adapter plates, while also avoiding contact with the dirty filter.

INDEX

ALL OUR RANGE HAS TO OFFER

WET & DRY VACUUMS

STANDARD WET & DRY VACUUMS	4
PORTABLE WET & DRY VACUUMS	6
WET & DRY VACUUMS WITH POWER TOOL ACTIVATION	8
LARGE 50 LITER WET & DRY VACUUMS	12
STEALTHSONIC WET & DRY VACUUMS	14
ASH VACUUMS	17
DUST SEPARATORS	19

DRUM FANS

BENCHTOP FANS	21
ROTATABLE DRUM FANS	22

AIR MOVERS

PORTABLE AIR MOVERS	24
LARGE AIR MOVERS	25

ACCESSORIES

COMPATIBILITY MATRIX	28
----------------------	----

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS MATRIX	30
-------------------------------	----

POLYMER WET & DRY VACUUMS



FEATURES

- A** Sturdy handle with cord wrap design
- B** Powerful blower port instantly converts the vacuum into a blower
- C** Large on/off switch with water-resistant design for quick access
- D** Hose strap for convenient hose wrap
- E** Quick-connect locking hose system for an easy secure connection
- F** Rubberized non marring casters for smooth & easy movement across all surfaces
- G** Built-in drain port to conveniently empty liquids
- H** Accessory storage bag for easy reach and storage







POWERFUL AND LIGHTWEIGHT DESIGN

SPECIFICATIONS

	DXV20P	DXV23P	DXV34P
CAPACITY	20 Liter	23 Liter	34 Liter
POWER & VOLTAGE	1050W 230V/50Hz	1150W 230V/50Hz	1200W 230V/50Hz
TANK MATERIAL	Polymer	Polymer	Polymer
AIR FLOW	37.8 (EU L/S)	42.5 (EU L/S)	42.45 (EU L/S)
SEALED PRESSURE	15 (KPA) /230V	13 (KPA) /230V	17 (KPA) /230V
CORD LENGTH	3 Meter	3 Meter	3 Meter
HOSE DIAMETER	48 Millimeter	48 Millimeter	48 Millimeter
EAN CODE	6921183087630	6921183087197	6921183087210

EXCLUSIVE SPECS



STAINLESS STEEL WET & DRY VACUUMS



FEATURES

- A** Lightweight design for easy portability
- B** Hose strap for convenient hose wrap
- C** Power cord wrap for quick transport and storage
- D** Powerful blower port instantly converts the vacuum into a blower
- E** Large on/off switch with water-resistant design for quick access
- F** Quick-connect locking hose system for an easy secure connection
- G** Rubberized non marring casters for smooth & easy movement across all surfaces
- H** Built-in drain port to conveniently empty liquids






BUILT TOUGH FOR INDUSTRIAL CLEANUPS

SPECIFICATIONS

	DXV20S	DXV25S	DXV30SA
CAPACITY	20 Liter	25 Liter	30 Liter
POWER & VOLTAGE	1050W 230V/50Hz	1050W 230V/50Hz	1050W 230V/50Hz
TANK MATERIAL	Stainless Steel	Stainless Steel	Stainless Steel
AIR FLOW	37.8 (EU L/S)	37.8 (EU L/S)	37.8 (EU L/S)
SEALED PRESSURE	15 (KPA) /230V	15 (KPA) /230V	15 (KPA) /230V
CORD LENGTH	3 Meter	3 Meter	3 Meter
HOSE DIAMETER	48 Millimeter	48 Millimeter	48 Millimeter
EAN CODE	6921183087647	6921183001650	6921183087654

EXCLUSIVE SPECS





COMPACT & RUGGED TOOLBOX WET & DRY VACUUM



PACKAGED AND ON THE GO IN SECONDS!

FEATURES




- A** Compact 'Toolbox' design
- B** Rugged and quality plastic casing
- C** Power cord wrap for quick transport and storage
- D** On-board accessory storage bin
- E** Blower feature for removing dust & debris
- F** Large on/off switch with water-resistant design for quick access
- G** Lightweight design for easy portability

SPECIFICATIONS

DXV15T

CAPACITY	15 Liter
POWER & VOLTAGE	1100W 230V/50Hz
TANK MATERIAL	Polymer
AIR FLOW	42.5 (EU L/S)
SEALED PRESSURE	12 (KPA) /230V
CORD LENGTH	4.8 Meter
HOSE DIAMETER	48 Millimeter
EAN CODE	6921183087173

EXCLUSIVE SPECS



LIGHTWEIGHT GARAGE WET & DRY VACUUM



WALL MOUNTED & REMOTE CONTROLLED

FEATURES




- A** Includes remote for long distance power tool activation
- B** Lightweight design for easy portability
- C** Power cord wrap for quick transport and storage
- D** Powerful blower port instantly converts the vacuum into a blower
- E** Large on/off switch with water-resistant design for quick access
- F** Accessory box for easy power cord organization

SPECIFICATIONS

DXV23G

CAPACITY	23 Liter
POWER & VOLTAGE	1100W 230V/50Hz
TANK MATERIAL	Polymer
AIR FLOW	37.8 (EU L/S)
SEALED PRESSURE	12 (KPA) /230V
CORD LENGTH	3 Meter
HOSE DIAMETER	48 Millimeter
EAN CODE	6921183000745

EXCLUSIVE SPECS





WORK SAFER & FASTER WITH POWER TOOL ACTIVATION

Introducing our range of industrial wet and dry vacuums with power tool activation outlets. Designed to make your job easier and more efficient, these vacuums automatically turn on and off when you start or stop your power tools. This means you can focus on the task at hand without having to worry about manually turning on the vacuum or cleaning up after the job is done. Our industrial wet and dry vacuums are built to withstand even the toughest jobsite conditions and come in a variety of sizes and capacities to meet your specific needs. With powerful suction and the convenience of power tool activation, our vacuums are the perfect addition to your workshop or jobsite arsenal.

POLYMER WET & DRY VACUUMS WITH POWER TOOL ACTIVATION



FEATURES

- A** Power tool activation outlet (PTA)
- B** Powerful blower port instantly converts the vacuum into a blower
- C** Large on/off switch with water-resistant design for quick access
- D** Hose strap for convenient hose wrap
- E** Quick-connect locking hose system for an easy secure connection
- F** Rubberized non marring casters for smooth & easy movement across all surfaces
- G** Built-in drain port to conveniently empty liquids
- H** Accessory storage bag for easy reach and storage

EXCLUSIVE SPECS



SPECIFICATIONS

	DXV20PTA	DXV23PTA	DXV34PTA
CAPACITY	20 Liter	23 Liter	34 Liter
POWER & VOLTAGE	1050W 230V/50Hz	1150W 230V/50Hz	1200W 230V/50Hz
TANK MATERIAL	Polymer	Polymer	Polymer
AIR FLOW	37.8 (EU L/S)	42.5 (EU L/S)	42.45 (EU L/S)
SEALED PRESSURE	15 (KPA) /230V	13 (KPA) /230V	17 (KPA) /230V
CORD LENGTH	3 Meter	3 Meter	3 Meter
HOSE DIAMETER	48 Millimeter	48 Millimeter	48 Millimeter
EAN CODE	6921183000059	6921183087395	6921183087425



ACCESSORIES POUCH BUILT TO LAST

STAINLESS STEEL WET & DRY VACUUMS WITH POWER TOOL ACTIVATION



SPECIFICATIONS

	DXV20SPTA	DXV25SPTA	DXV30SAPTA	DXV30SPTA
CAPACITY	20 Liter	25 Liter	30 Liter	30 Liter
POWER & VOLTAGE	1050W 230V/50Hz	1050W 230V/50Hz	1050W 230V/50Hz	1150W 230V/50Hz
TANK MATERIAL	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
AIR FLOW	37.8 (EU L/S)	37.8 (EU L/S)	37.8 (EU L/S)	42.45 (EU L/S)
SEALED PRESSURE	15 (KPA) /230V	15 (KPA) /230V	15 (KPA) /230V	13 (KPA) /230V
CORD LENGTH	3 Meter	3 Meter	3 Meter	3 Meter
HOSE DIAMETER	48 Millimeter	48 Millimeter	48 Millimeter	48 Millimeter
EAN CODE	6921183001766	6921183001773	6921183087678	6921183087418



RUBBERIZED CASTERS HANDLE ALL TERRAIN TYPES

EXCLUSIVE SPECS

POWER TOOL



ACTIVATION



HOSE STRAP



ACCESSORIES POUCH



RUBBERIZED CASTERS



BUILT IN DRAIN PORT

FEATURES

- A** Power tool activation outlet (PTA)
- B** Powerful blower port instantly converts the vacuum into a blower
- C** Large on/off switch with water-resistant design for quick access
- D** Hose strap for convenient hose wrap
- E** Quick-connect locking hose system for an easy secure connection
- F** Rubberized non marring casters for smooth & easy movement
- G** Built-in drain port to conveniently empty liquids



ACCESSORIES POUCH BUILT TO LAST

50 LITER STAINLESS STEEL WET & DRY VACUUMS



BUILT IN DRAIN PORT

FEATURES

- A** Powerful blower port instantly converts the vacuum into a blower
- B** Large on/off switch with water-resistant design for quick access
- C** Hose strap for convenient hose wrap
- D** Quick-connect locking hose system for an easy secure connection
- E** Rubberized non marring casters for smooth & easy movement
- F** Built-in drain port to conveniently empty liquids

TOP SPECS



ACCESSORIES POUCH BUILT TO LAST

SPECIFICATIONS

	DXV50S (NON PTA)	DXV50SPTA
CAPACITY	50 Liter	50 Liter
POWER & VOLTAGE	1300W 230V/50Hz	1300W 230V/50Hz
TANK MATERIAL	Stainless Steel	Stainless Steel
AIR FLOW	54.7 (EU L/S)	54.7 (EU L/S)
SEALED PRESSURE	19 (KPA) /230V	19 (KPA) /230V
CORD LENGTH	6.1 Meter	6.1 Meter
HOSE DIAMETER	64 Millimeter	64 Millimeter
EAN CODE	6921183001742	6921183001391






STEALTHSONIC **50% QUIETER OPERATION** **JUST AS POWERFUL**

The DEWALT STEALTHSONIC Wet/Dry Vacuum has a powerful and quiet motor providing strong suction power and airflow to clean up the toughest wet and dry debris while being 50% quieter than the current model. It features a quick-connect locking hose system, making it an easy but secure connection. High performance rubberized non-marring casters allow for smooth and easy movement across any surface. The large fixed handle doubles as a cord wrap for easy transportation across any job site. The filter features the exclusive Clean and Connect™ system, which is only available for DEWALT Wet/Dry Job Site Vacuums giving you the ability to quickly and easily change filters without the need for screws or adapter plates, while also avoiding contact with the dirty filter.

STEALTHSONIC

WET & DRY VACUUMS

WITH QUIET TECHNOLOGY


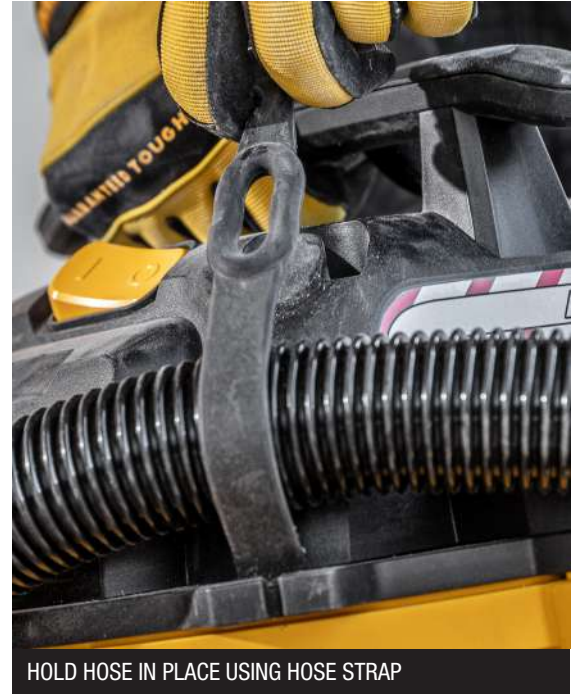


HOLD HOSE IN PLACE USING HOSE STRAP

FEATURES

- A** Quiet technology provides 50% quieter operation
- B** Power cord wrap for quick transport and storage
- C** Large on/off switch with water-resistant design for quick access
- D** Hose strap for convenient hose wrap
- E** Quick-connect locking hose system for an easy secure connection
- F** Rubberized non marring casters for smooth & easy movement across all surfaces
- G** Built-in drain port to conveniently empty liquids
- H** Accessory storage bag for easy reach and storage

TOP SPECS



SPECIFICATIONS

	DXV34P-QT	DXV45P-QT
CAPACITY	34 Liter	45 Liter
POWER & VOLTAGE	960W 230V/50Hz	960W 230V/50Hz
TANK MATERIAL	Polymer	Polymer
AIR FLOW	45 (EU L/S)	47 (EU L/S)
SEALED PRESSURE	18 (KPA) /230V	19 (KPA) /230V
CORD LENGTH	3 Meter	6.1 Meter
HOSE DIAMETER	48 Millimeter	64 Millimeter
EAN CODE	6921183001148	6921183001155



50% QUIETER OPERATION

STEALTHSONIC WET & DRY VACUUMS WITH QUIET TECHNOLOGY



FEATURES

- A** Quiet technology provides 50% quieter operation
- B** Power cord wrap for quick transport and storage
- C** Large on/off switch with water-resistant design for quick access
- D** Hose strap for easy cord organization
- E** Quick-connect locking hose system for easy but secure connection
- F** Rubberized non-marring casters for smooth & easy movement across all surfaces
- G** Built-in drain port to conveniently empty liquids
- H** Accessory storage bag for easy reach and storage

TOP SPECS



ATTACHED ACCESSORY STORAGE BAG



RUBBERIZED NON-MARRING CASTERS

PRODUCT SPECIFICATION

	DXV53S-QT	DXV61P-QT
CAPACITY	53 Liter	61 Liter
POWER & VOLTAGE	960W 230V/50Hz	960W 230V/50Hz
TANK MATERIAL	Stainless Steel	Polymer
AIR FLOW	47 (EU L/S)	52 (EU L/S)
SEALED PRESSURE	19 (KPA) /230V	19 (KPA) /230V
CORD LENGTH	6.1 Meter	6.1 Meter
HOSE DIAMETER	64 Millimeter	64 Millimeter
EAN CODE	6921183001780	6921183001179

STAINLESS STEEL POWERFULL 15 LITER ASH VACUUM

DEWALT 15 Liter Ash Vacuum is a **Dry Pick Up Only**. The Stainless Steel container means it is able to pick up hot ash. Accessories included are a hose, extension wand, cartridge filter and pre-filter.



FEATURES


- A** Powerful motor provides maximum power for suction
- B** Sturdy handle for easy carrying
- C** Large on/off switch with water-resistant design for quick access
- D** Metal lid latches to secure lid to the tank
- E** Ideal for cleaning cold ash
- F** Hose organizer for easy hose organization
- G** 4-piece accessory kit

SPECIFICATIONS

DXV15A

CAPACITY	15 Liter
POWER & VOLTAGE	600W 230V/50Hz
TANK MATERIAL	Stainless Steel
AIR FLOW	28.3 (EU L/S)
SEALED PRESSURE	14 (KPA) /230V
CORD LENGTH	2.4 Meter
HOSE DIAMETER	32 Millimeter
EAN CODE	6921183001544

TOP SPECS





REMOVE UP TO 99.5% OF DUST FROM THE AIRSTREAM

Introducing our range of industrial dust separators - the ultimate solution to keep your workspace clean and safe. Our dust separators are designed to remove up to 99.5% of dust and debris from the airstream, preventing suction loss and protecting your filters from premature clogging. This means your equipment can operate at maximum efficiency, reducing maintenance and downtime. Our separators are available in various sizes and capacities to suit your needs, and can be easily integrated into your existing system. With our advanced technology and durable construction, you can trust our dust separators to deliver reliable and long-lasting performance, while keeping your workspace dust-free and healthy. Invest in our industrial dust separators today and experience the benefits of clean air and improved productivity!

COMPACT & PORTABLE DUST SEPARATORS



REMOVES UP TO 99.5% OF DUST AND DEBRIS

FEATURES

- A** Dust separator with strong and durable polymer or stainless steel tank
- B** Removes up to 99.5% of dust and debris from the airstream, preventing suction loss
- C** Compatible with most brands' vacuum hoses
- D** Swiveling casters provide ease of movement
- E** Unique user-friendly antistatic material
- F** Easy to assemble and store
- G** Helps extend filter life

SPECIFICATIONS

	DXVCS002	DXVCS003
CAPACITY	23 Liter	38 Liter
POWER & VOLTAGE	960W 230V/50Hz	1020W 230V/50Hz
TANK MATERIAL	Stainless Steel	Polymer
AIR FLOW	35 (EU L/S)	44 (EU L/S)
SEALED PRESSURE	19 (KPA) /230V	19 (KPA) /230V
CORD LENGTH	6.1 Meter	6.1 Meter
HOSE DIAMETER	64 Millimeter	64 Millimeter
EAN CODE	6921183001681	6921183001704



CONNECT TO ALL TYPES OF VACUUMS



THE POWER OF SILENT FANS AND AIR MOVERS

The DEWALT Fan is an ideal choice for using in workshops or anywhere you need to keep people and machines cool. These fans have a unique drum and blade design making them strong enough to deliver a safe and reliable performance which is powerful yet silent.


With a wide range of air speeds and operating angles, the DEWALT air movers offer leading performance and multiple-purpose design. It can perform a full range of blow-drying tasks, whether on wet carpets, walls or ceilings. It can also easily blow away dust or water stains caused by other jobs.

EXTRA SILENT BENCHTOP FAN

TOP SPECS



MULTIPLE SPEED OPTIONS

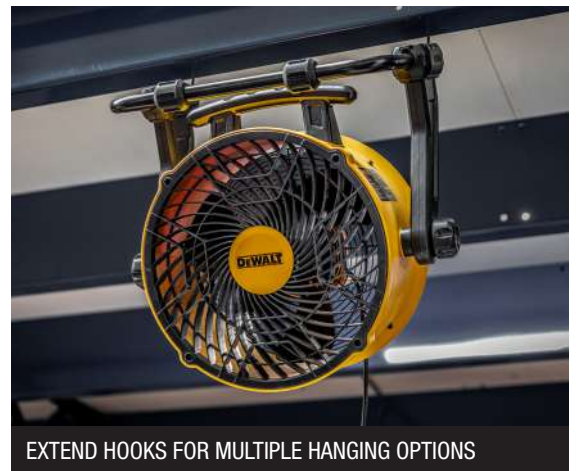

EXTEND HOOKS FOR MULTIPLE HANGING OPTIONS

SPECIFICATIONS

DXF1645A

FAN SIZE	40 centimeter
MOTOR	110 Watt
AIR FLOW	496 ±5% (EU L/S)
DRIVING	Direct Driven
NOISE	≤ 60 dB(A)
BLADES	3
CORD LENGTH	1.8 Meter
EAN CODE	6921183001254

FEATURES

- A** Silent in operation, less than 60 dB(A)
- B** Multiple hanging options - freestanding, hang hooks, and wall mounts
- C** 1.8m grounded power cord with fuse for adequate safety
- D** Sturdy handle for easy carrying
- E** Built-in cord wrap design for easy storage
- F** 360-Degree tilting fan head to direct airflow up or down as desired
- G** 3-Speed settings provide varying levels of air flow
- H** Nonskid feet for operational stability


EXTRA SILENT 180° ROTATABLE DRUM FANS



TOP SPECS



NONSKID FEET FOR OPERATIONAL STABILITY

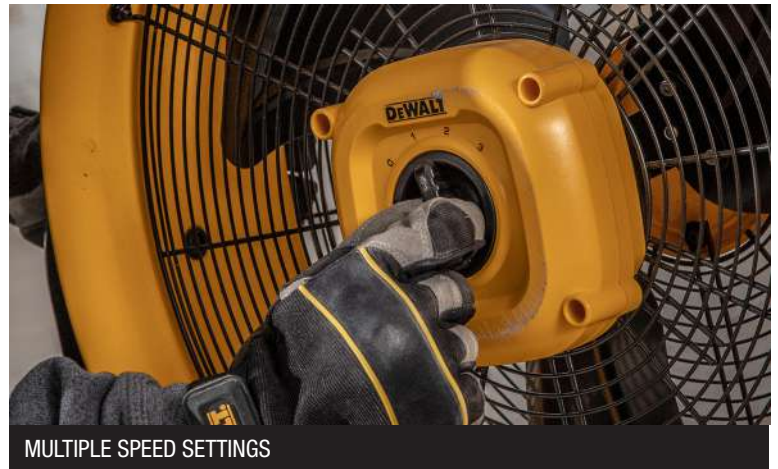

MULTIPLE SPEED SETTINGS

SPECIFICATIONS

	DXF1853	DXF2067
FAN SIZE	45 centimeter	51 centimeter
MOTOR	110 Watt	110 Watt
AIR FLOW	537 ±5% (EU L/S)	669 ±5% (EU L/S)
DRIVING	Direct Driven	Direct Driven
NOISE	≤ 63 dB(A)	≤ 63 dB(A)
BLADES	3	3
CORD LENGTH	1.8 Meter	1.8 Meter
EAN CODE	6921183000882	6921183000905



FEATURES

- A** Silent in operation, less than 63 dB(A)
- B** 1.8m grounded power cord with fuse for adequate safety
- C** Rotation angle can be adjusted to direct air flow providing dynamic circulation
- D** Sturdy handle for easy carrying
- E** Built-in Cord Wrap design for easy storage
- F** 3 Speed settings provide varying levels of air flow
- G** Nonskid feet for operational stability
- H** Unique drum and air hood design to increase air flow

EXTRA SILENT 360° ROTATABLE DRUM FAN



TOP SPECS



SPECIFICATIONS

DXF2410

FAN SIZE	61 centimeter
MOTOR	190 Watt
AIR FLOW	1021 ±5% (EU L/S)
DRIVING	Direct Driven
NOISE	≤ 66 dB(A)
BLADES	3
CORD LENGTH	3.6 Meter
EAN CODE	6921183000912

FEATURES

- A** Grounded 3.6 meter power cord for extra safety and reach
- B** Rotation angle can be adjusted to direct air flow providing dynamic circulation
- C** Built-in cord wrap design for easy storage
- D** Stepless speed setting gives you the freedom to adjust the air speed to whatever you want
- E** Nonskid feet for operational stability
- F** Folding handle and large wheels provide easier transport



POWERFULL & EFFICIENT PORTABLE AIR MOVER



FEATURES

- A** 3-Speed operation to conveniently control air flow
- B** Sturdy handle for easy lifting and carrying
- C** 3 angle positions, flat, 45 degrees, and 90 degrees
- D** 3 meter power cord with built-in wrapping



STURDY HANDLE FOR EASY LIFTING AND CARRYING

SPECIFICATIONS

DXAM2250

MOTOR	130 Watt
AIR FLOW	236 (EU L/S)
DRIVING	Direct Driven
NOISE	≤ 60 dB(A)
OPERATING POSITION	0°, 45°, 90°
CORD LENGTH	3 Meter
EAN CODE	6921183077013

TOP SPECS



POWERFULL & EFFICIENT LARGE AIR MOVER




FEATURES

- A** Telescoping handle with levers provides for added convenience
- B** Sturdy handle with tabs for easy cord wrapping
- C** 3-Speed operation to conveniently control air flow
- D** Large rubber wheels for easy moving
- E** Powerful blower circulator ensures high efficiency
- F** 9 meter power cord with built-in wrapping

SPECIFICATIONS

	DXAM2815
MOTOR	450 Watt
AIR FLOW	700 (EU L/S)
DRIVING	Direct Driven
NOISE	≤ 66 dB(A)
OPERATING POSITION	0°, 90°
CORD LENGTH	9 Meter
EAN CODE	6921183077020

TOP SPECS



RETRACTABLE HANDLE AND LARGE WHEELS PROVIDE EASIER TRANSPORT

ACCESSORIES

COMPATIBILITY MATRIX

WET & DRY VACUUM ACCESSORIES

		HOSES	WANDS	CARTRIDGE	DUST BAGS	ACCESSORY HOLDER	UTILITY NOZZLES	CREVICE NOZZLES	
STANDARD	DXV15T	DXVA19-2600	DXVA19-1202	DXVC4001 / DXVC4002 / DXVC4003	DXVA25-4240	N/A	DXVA19-1300	DXVA19-1400	
	DXV20P	DXVA19-2558/ DXVA19-2500			DXVA19-4204 / DXVA19-4214	DXVA19-5158			
	DXV20S								
	DXV23G	DXVA19-2600			DXVA19-4203	N/A			
	DXV23P	DXVA19-2558 / DXVA19-2500	DXVA19-1200A		DXVA19-4201 DXVA19-4211	DXVA19-5158			
	DXV30S				DXVA19-4204 / DXVA19-4214	DXVA19-5256			
	DXV30SA				DXVA19-5158				
	DXV34P				DXVA19-5156				
	DXV38P				DXVA19-5256				
	DXV38S								
	DXV45P	DXVA19-2556 / DXVA19-2501	DXVA08-2502	DXVC6910 / DXVC6912 / DXVC6914	DXVA19-4202 / DXVA19-4212	DXVA19-5156	DXVA19-5356	DXVA08-2503	DXVA08-2506
	DXV50S								
	DXV53P								
	DXV53S								
	DXV61P								
DXV61S									
PTA	DXV20PTA	DXVA19-2558 / DXVA19-2500	DXVA19-1202	DXVC4001 / DXVC4002 / DXVC4003	DXVA19-4204 / DXVA19-4214	DXVA19-5158	DXVA19-1300	DXVA19-1400	
	DXV20SPTA								
	DXV23PTA				DXVA19-4201 / DXVA19-4211				
	DXV25SPTA								
	DXV30SAPTA				DXVA19-4204 / DXVA19-4214				
	DXV30SPTA								
	DXV34PTA	DXVA19-1200A			DXVA19-4201 / DXVA19-4211	DXVA19-5156			
	DXV38PTA								
	DXV38SPTA				DXVA19-5256				
	DXV45PTA	DXVA19-2556 / DXVA19-2501	DXVA08-2502	DXVC6910 / DXVC6912 / DXVC6914	DXVA19-4202 / DXVA19-4212	DXVA19-5156	DXVA19-5356	DXVA08-2503	DXVA08-2506
	DXV50SPTA								
	DXV53PTA								
DXV53SPTA									
DXV61PTA									
DXV61SPTA									

FLOOR NOZZLES	ROUND BRUSH	FLOOR BRUSH	CAR NOZZLES	FOAM FILTER	HOSE ADAPTOR	(DRAIN)	(DRAIN)	(DRAIN)
DXVA19-1900D	DXVA19-2400	DXVA19-2591	DXVA13-4333	DXVA20-1200A	DXVA19-1400			
					DXVA19-5158			
					N/A			
N/A	DXVA08-2401	DXVA08-2591	N/A	DXVA19-1600	DXVA08-2506	DXVA13-4364	DXVA15-1100	DXVA22-2520
DXVA19-1900D	DXVA19-2400	DXVA19-2591	DXVA13-4333	DXVA20-1200A	N/A			
N/A	DXVA08-2401	DXVA08-2591	N/A	DXVA19-1600	DXVA25-1213			

ACCESSORIES

COMPATIBILITY MATRIX

WET & DRY VACUUM ACCESSORIES

		HOSES	WANDS	CARTRIDGE	DUST BAGS	ACCESSORY HOLDER	UTILITY NOZZLES	CREVICE NOZZLES
STEALTHSONIC	DXV20P-QT	DXVA19-2558 / DXVA19-2500	DXVA19-1202	DXVC4001 / DXVC4002 / DXVC4003	DXVA19-4204 / DXVA19-4214	DXVA19-5158	DXVA19-1300	DXVA19-1400
	DXV20S-QT				DXVA19-4201 / DXVA19-4211			
	DXV23PL-QT				DXVA19-4204 / DXVA19-4214			
	DXV23P-QT				DXVA19-4201 / DXVA19-4211			
	DXV25S-QT					DXVA19-5156		
	DXV30SA-QT					DXVA19-5256		
	DXV34P-QT		DXVA19-1200A		DXVA19-4201 / DXVA19-4211	DXVA19-5156		
	DXV38P-QT					DXVA19-5256		
	DXV38S-QT					DXVA19-5156		
	DXV45P-QT	DXVA19-2556 / DXVA19-2501	DXVA08-2502	DXVC6910 / DXVC6912 / DXVC6914	DXVA19-4202 / DXVA19-4212	DXVA19-5356	DXVA08-2503	DXVA08-2506
	DXV50S-QT				DXVA19-4202 / DXVA19-4212			
	DXV53P-QT				DXVA19-5356			
	DXV53S-QT				DXVA19-5356			
	DXV61P-QT					DXVA19-5356		
	DXV61S-QT					DXVA19-5356		
STEALTHSONIC PTA	DXV20PTA-QT	DXVA19-2558 / DXVA19-2500	DXVA19-1202	DXVC4001 / DXVC4002 / DXVC4003	DXVA19-4204 / DXVA19-4214	DXVA19-5158	DXVA19-1300	DXVA19-1400
	DXV20SPTA-QT				DXVA19-4201 / DXVA19-4211			
	DXV23PLPTA-QT				DXVA19-4204 / DXVA19-4214			
	DXV23PPTA-QT				DXVA19-4201 / DXVA19-4211			
	DXV25SPTA-QT					DXVA19-5156		
	DXV30SAPTA-QT					DXVA19-5256		
	DXV34PPTA-QT		DXVA19-1200A		DXVA19-4201 / DXVA19-4211	DXVA19-5156		
	DXV38PPTA-QT					DXVA19-5256		
	DXV38SPTA-QT					DXVA19-5156		
	DXV45PPTA-QT	DXVA19-2556 / DXVA19-2501	DXVA08-2502	DXVC6910 / DXVC6912 / DXVC6914	DXVA19-4202 / DXVA19-4212	DXVA19-5356	DXVA08-2503	DXVA08-2506
	DXV50SPTA-QT				DXVA19-4202 / DXVA19-4212			
	DXV53PPTA-QT				DXVA19-5356			
	DXV53SPTA-QT				DXVA19-5356			
	DXV61PPTA-QT					DXVA19-5356		
	DXV61SPTA-QT					DXVA19-5356		

FLOOR NOZZLES	ROUND BRUSH	FLOOR BRUSH	CAR NOZZLES	FOAM FILTER	HOSE ADAPTOR	(DRAIN)	(DRAIN)	(DRAIN)
DXVA19-1900D	DXVA19-2400	DXVA19-2591	DXVA13-4333	DXVA20-1200A	N/A			
N/A	DXVA08-2401	DXVA08-2591	N/A	DXVA19-1600	DXVA25-1213			
DXVA19-1900D	DXVA19-2400	DXVA19-2591	DXVA13-4333	DXVA20-1200A	N/A	DXVA13-4364	DXVA15-1100	N/A
N/A	DXVA08-2401	DXVA08-2591	N/A	DXVA19-1600	DXVA25-1213			

PRODUCT SPECIFICATIONS

ALL PRODUCT SPECIFICATIONS IN ONE PLACE

WET & DRY VACUUMS

	HOSE DIAMETER	CAPACITY	VOLTAGE	WATTAGE	CORD LENGTH	TANK MATERIAL	SEALED PRESSURE	AIR FLOW	EAN CODE
DXV20P	48 mm	20 Liter	230 Volt / 50 Hz	1050 Watt	3 Meter	Polymer	15 (KPA)	37.8 (EU L/S)	6921183087630
DXV23P		23 Liter		1150 Watt			13 (KPA)	42.5 (EU L/S)	6921183087197
DXV34P		34 Liter		1200 Watt			17 (KPA)	42.45 (EU L/S)	6921183087210
DXV20S		20 Liter		1050 Watt		Stainless Steel	15 (KPA)	37.8 (EU L/S)	6921183087647
DXV25S		25 Liter							6921183001650
DXV30SA		30 Liter							6921183087654
DXV15T		15 Liter		1100 Watt		Polymer	12 (KPA)	42.5 (EU L/S)	6921183087173
DXV23G		23 Liter							6921183000745
DXV20PTA		20 Liter						1050 Watt	15 (KPA)
DXV23PTA		23 Liter		1150 Watt		13 (KPA)	42.5 (EU L/S)	6921183087395	
DXV34PTA		34 Liter		1200 Watt		17 (KPA)	42.45 (EU L/S)	6921183087678	
DXV20SPTA		20 Liter		1050 Watt		Stainless Steel	15 (KPA)	37.8 (EU L/S)	6921183001766
DXV25SPTA									6921183001773
DXV30SAPTA									6921183087678
DXV30SPTA		30 Liter		1150 Watt		13 (KPA)	42.45 (EU L/S)	6921183087418	
DXV50S	64 mm	50 Liter	1200 Watt	6,1 Meter	Stainless Steel	17 (KPA)	54.7 (EU L/S)	6921183001742	
DXV50SPTA								6921183001391	
DXV34P-QT	48 mm	34 Liter	960 Watt	3,0 Meter	Polymer	19 (KPA)	35.0 (EU L/S)	6921183001148	
DXV45P-QT	64 mm	45 Liter		6,1 Meter			Stainless Steel	44.0 (EU L/S)	6921183001155
DXV53S-QT		53 Liter			47.2 (EU L/S)			6921183001780	
DXV61P-QT	61 Liter	1020 Watt	Polymer	6921183001179					
DXV15A	32 mm	15 Liter	600 Watt	2,4 Meter	Stainless Steel	14 (KPA)	28.3 (EU L/S)	6921183001544	
DXVCS002	64 mm	23 Liter	960 Watt	6,1 Meter				19 (KPA)	35.0 (EU L/S)
DXVCS003		38 Liter	1020 Watt		Polymer	44 (EU L/S)	6921183001704		

FANS

	FAN SIZE	MOTOR	AIRFLOW	DRIVING	NOISE	BLADES	CORD LENGTH	EAN CODE
DXF1645	40 cm	110 Watt	496 ±5% (EU L/S)	Direct Driven	≤ 60 dB(A)	3	1.8 Meter	6921183000844
DXF1853	45 cm	99 Watt	537 ±5% (EU L/S)		≤ 63 dB(A)			6921183000882
DXF2067	51 cm	110 Watt	669 ±5% (EU L/S)		6921183000905			
DXF2410	61 cm	220 Watt	1021 ±5% (EU L/S)		≤ 66 dB(A)		3.6 Meter	6921183000912

AIR MOVERS

	ROTATE SPEED	MOTOR	AIRFLOW	DRIVING	NOISE	CORD LENGTH	OPERATION POSITION	EAN CODE
DXAM2250	Type 1	130 Watt	177 (EU L/S)	Direct driven	≤ 60 dB(A)	3 Meter	0°, 45°, 90°	6921183077013
DXAM2815	Type 1	450 Watt	604 (EU L/S)		≤ 66 dB(A)	9 Meter	0°, 90°	6921183077020





Specifications as mentioned in the catalogue are not binding, and can be changed without notice of the producer.

**Distributed under
license by;**

**CJP Marketing Pte Ltd
2 Gambas Crescent
#09-14, Nordcom II
Singapore 757044**

WWW.2HELPU.COM

WWW.DEWALT.COM



DEWALT® and GUARANTEED TOUGH.® are trademarks of Stanley Black & Decker, Inc. and used under license.

All rights reserved. Neither this catalogue nor its text, illustrations, drawings or any part thereof, may be reproduced, stored in a retrieval system photocopied, recorded or transmitted in any form, whether electronic or otherwise, without our consent. To the best of our knowledge, all descriptions and illustrations contained in this catalogue are correct at the time of going to print. We cannot, however, be held liable for any inaccuracies of description or illustration and reserve the right to change specifications without notification. © DEWALT® 2023.