

**Engineered
Manufacturing
Corporation**

STEEL FABRICATORS

6010 GAICRL

Wheel Offset Disk Harrow

**Working Width
06 to 10 ft.**

*Disc Spacing 10.1/2" (270 mm)
Round Axles 1.5/8" (41.28 mm)
Equipped with dual roller bearings.*



**Specially designed for primary tillage
in new cleared forest areas or heavy sugar
cane stubble left after the last ratoon crop.**

**RUGGEDLY BUILT
FOR LONGER LIFE**


Standard Features:

- EMC - 262 x 1.5/8" oil bath bearings assemblies with tapered roller bearings, duo-cone seals and wear plates.
- 1.5/8" (41.28mm) round heat-treated alloy steel axels.
- Cast iron spacer spools, 10.1/2" (270mm).
- 24" x 6.00mm Notched disc blades on front and rear.
- Adjustable disc blades scrapers.
- Two singles 750 x 16 - 10 ply rib implement tires.
- Hydraulic control group includes hydraulic cylinders, hose holder and hose with fittings and quick couplers to reach the rear of tractor.
- Hardened bushings and pins on all cylinder pivot points.
- Depth control adjustment.
- Rigid frame.
- Drawbar jack.

RUGGEDLY BUILT FOR LONGER LIFE



SPECIAL OIL BATH BEARING ASSEMBLIES

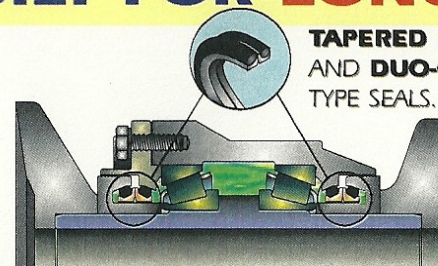

TAPERED BEARINGS AND DUO-CONE TYPE SEALS.

THE LIFE OF YOUR DISK HARROW, REQUIRES ORIGINAL EMC REPLACEMENT PARTS



Specifications:

Model	Number of Disc Blades	Working Width ft. in. (mm)	Disc Blades		Approx. Net Weight* lbs (Kg)	Tractor Draw Bar Horse Power
			Dimensions	Spacing		
6010 GAICRL	16	6 ft. 7" (2,000)			3,173 (1,440)	50 - 65
	18	7 ft. 7" (2,300)			3,442 (1,562)	65 - 75
	20	8 ft. 5" (2,570)	24"x6.0mm	10.1/2"	3,605 (1,636)	70 - 75
	22	9 ft. 4" (2,840)		(270mm)	3,768 (1,710)	75 - 80
	24	10 ft. 2" (3,109)			3,931 (1,784)	80 - 85

* Approx. Net Weight with 24" x 6.0mm disc blades

Depth of Cut: 3" to 6" (80 to 160mm)

** Please note that the tractor draw bar horse power are suggested ranges and vary according to soil conditions and weight added to harrow.



STEEL FABRICATORS

3775 N.W. 81 Street, Miami, FL 33147

Phones: 305-693-0089, 305-691-2226

Fax: 305-691-2210

Web: www.emccorpo.com Email: emccorp@aol.com