



MARCHESAN

9009T DODH-F

DOUBLE OFFSET DISK HARROW



WORKING WIDTH
33 TO 38 FT.

THE BRAND OF THE LAND



MARCHESAN

The model **9009T DODH-F** is specially designed for soil preparation, breaking clods and soil leveling, for large acreage farm operation with high operational performance. Easy to operate and low maintenance.



TATU high strength steel "C" hanger was shaped to keep disking depth in any kind of soil.



Front and rear gangs leveling are manually performed through stabilizer bar which controls the entire uniformity of disc harrow. Independent leveling adjustment rod threads are available on each wing of the harrow.


CHARACTERISTICS:

- TATU oil bath bearing assemblies with tapered roller bearings and duocone seals, deliver higher durability, lasting longer, reducing both time and maintenance costs.
- Wide range of treated boron steel disc blades, either plain or notched, in the front and rear gang, last longer, reducing both time and maintenance costs.
- 1.3/4" round heat treated alloy steel gang axles assure high performance of the 9009T DODH-F disk harrow.
- Casting iron spacer spools were designed to provide extra blade support to reduce blade breakage.
- Individually adjustable disc blade scraper.
- Central and wing double wheels, hydraulic driven, provide both depth control and transportation of the disk harrow.
- Standard tapered disc blades and furrow fillers on rear gangs to reduce ridges, delivering smooth seedbed.
- 6.00mm high resistant wear plate to protect either oil bath or regreasable bearing housing from abrasive wearing.
- Drawbar jack and safety chain for additional disk harrow transport security.
- Recommended: Wheels and Tires
 - On central frame - two dual 12.5-15 - 12 ply tires, 8-bolt hubs (NOT INCLUDED).
 - On wing frames - dual 11L15 - 12 ply tires, 6-bolt hubs (INCLUDED).
 - On front - two 20.5 x 8 - 10 ply tires, 5-bolt hubs (NOT INCLUDED).
- Extra-strength central and wing frames are made of 5.7/8" square tubing and 5.7/8" x 4" rectangular tubing

RUGGEDLY BUILT FOR LONGER LIFE



SPECIAL OIL BATH BEARING ASSEMBLIES

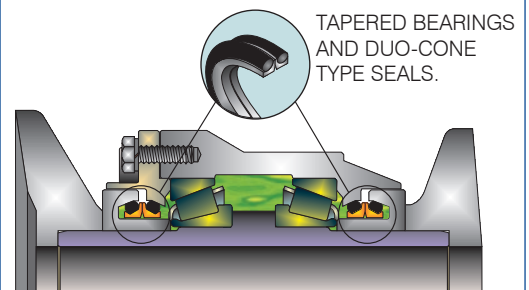

THE LIFE OF YOUR DISK HARROW. REQUIRES ORIGINAL TATU REPLACEMENT PARTS.

Specifications:

Model	Number of Disc Blades	Working Width ft. in. (mm)	Disc Blades		Transport Height ft. in. (mm)	Approx. Net Weight lbs (Kg)	Tractor Draw Bar
			Dimensions	Spacing			
9009T DODH-F	88	33' 3" (10,155)		9"	14' 6" (4,435)	19,383 (8,792)	260 - 280
	96	35' 5" (10,795)	24"x6.0mm	230mm	16' (4,876)	20,262 (9,191)	280 - 320
	104	38' 3" (11,658)			17' 9" (5,049)	21,069 (9,557)	320 - 360

> Transport Width: 17' 9" - Avg. Weight per Disc: 192 lbs (87 Kg) - Axle Diameter: 1.3/4"

MARCHESAN S.A. reserves the right to perfect or alter the characteristics of its products, without the obligation to do so with those already marketed and without giving prior knowledge. The photos and drawings are merely illustrative. - 07/2018 - Rev. 01

MARCHESAN IMPLEMENTOS E MÁQUINAS AGRÍCOLAS TATU S.A.

Av. Marchesan, 1979 - CEP 15994-900 - Matão-SP-Brasil
 Phone: +55 16 3382.8282 - Fax (Sales): 3382.8297
 CNPJ.: 52.311.289/0001-63 - Inscr. Est.: 441.000.151.114



www.marchesan.com.br email: tatu@marchesan.com.br