

## At-A-Glance<sup>®</sup> Direct and Remote Mount Alarm Models


## At-A-Glance Direct Mount Alarm -All Models

- Compatible with Krueger Sentry Gauges: Type D, Type H, Type B, Type PH, Type PD, Type O, and Type K.
- Powered by a 9 volt Lithium Battery.
- Magnetic Switch triggers a 110 DB Alarm.
- Can be reset even while in alarm mode.
- Test Switch allows you to test the battery before each use.
- All Alarms come with a 9 volt Lithium Battery and Magnetic Indicator.

## **At-A-Glance Remote Mount Alarm -All Models**

- Compatible with Krueger Sentry Gauges: Type D, Type H, Type B, Type PH, Type PD, Type O, and Type K.
- Powered by a 9 volt Lithium Battery.
- Magnetic Switch triggers a 110 DB Alarm.
- Can be reset even while in alarm mode.
- Test Switch allows you to test the battery before each use.
- All Alarms come with a 9 volt Lithium Battery and Magnetic Indicator.
- Remote Alarm comes with 25 feet of remote wire. Can be ordered with up to 100 feet of wire.

Part Number	Description
DAlarm	This is the standard model that includes all of the above options.
DAlarm-FL	With this model, the audible alarm is <u>replaced</u> with a small flashing LED light. The flashing light will visually alert when triggered by the magnetic indicator on the gauge and continue until reset. (this version has no audible)
DAlarm-FL-TO	With this model, there is an audible alarm with an added flashing light and time-out feature. The light will alert when triggered by the magnetic indicator on the gauge. The time-out feature will shut down the alarm after 20 seconds to save on battery life, but the light will continue to flash and the alarm will chirp every few seconds.

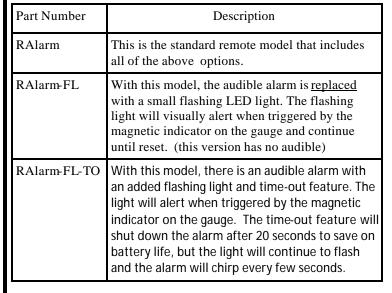


Standard Remote Version



Flashing Light Version

Krueger Sentry Gauge 1873 Siesta Lane Green Bay, WI 54313





www.ksentry.com

Email: info@ksentry.com