

### PETRONAS Fluid Technology Soluti⊳ns™

# **INDUSTRIAL PRODUCT RANGE**



PETRONAS, short for PETROLIAM NASIONAL BERHAD, is a fully integrated Oil & Gas Multinational with operations spanning the Oil and Gas energy chain from exploration & production to refining and oil & gas marketing. PETRONAS is amongst top 10 petroleum companies in the world and is highly ranked amongst fortune global 500's largest corporations. PETRONAS was founded on 17th August 1974 as the national oil company of Malaysia. It is one of the most successful nationally owned oil companies in the world.

Global lubricant business of PETRONAS is managed by PETRONAS Lubricants International or PLI.

PETRONAS has a wide range of lubricants specially created while maintaining the highest standards of the industry catering to market needs.

#### WHY PETRONAS LUBRICANTS?

PETRONAS Lubricantsuses it'sown API GroupIII+baseoil, ETRO, whose exceptional features are:



# - THE PETRONAS ADVANTAGE



Low viscosity formulation capability

Fuel economy

Excellent oxidation and thermal stability

Low maintenance

Low volatility

Long oil life

High viscosity index

High equipment life



# METAL WORKING FLUIDS

Water Soluble (	Water Soluble Cutting Oils		
Mineral oil			
Logamol E 160	General purpose cutting fluid suitable for light to medium duty operations such as grinding, turning, milling, drilling, forming, etc. on ferrous and non-ferrous materials.		
Semi-synthetic			
Mecafluid/S 42 Plus	Semi-synthetic cutting fluid suitable for light to moderate duty machining operations on ferrous and non-ferrous materials.		
Mecafluid/S 80 Heavy duty semi -synthetic cutting fluid suitable for wide variety of operations from form grinding, turning to deep hole drilling and broaching on ferrous and non-ferrous materials.			
Synthetic			
Mecafluid/S 2006	Synthetic fluid for heavy duty machining of ferrous and non-ferrous materials or where very high degree of surface finish is required.		

Neat Cutting Oils					
Application	Petronas Grade	cSt at 40°C	Compatibility	Recommendation	
Gear hobbing	Logamol EMG 40	40	Ferrous	Suitable for gear hobbing, shaving, shaping, threading, drilling, boring, reaming and tapping. EMG 40 is a heavy duty product for tough operations.	
Deep/hole drilling Broaching	Logamol EVG 17	17	Ferrous & non ferrous	Suitable for deep hole drilling, broaching, boring, reaming, tapping, milling, turning of ferrous material.	

Drawing & Forming Oils				
Application	Petronas Grade	cSt at 40°C	Recommendation	
Cold forging	Logamol LF 1C	80	Suitable for cold heading, progressive heading and cold nut forming. Not suitable for yellow metals like copper, brass and bronze.	
Stamping	Mecafluid/D 128FT	100	Suitable for fine deep pressing of steel of thickness up to 12mm.	


Quenching Oils				
Application	Petronas Grade	cSt at 40°C	Recommendation	
Medium fast	Logamol Quench MF	22	Suitable for quenching of smaller components such as nuts, bolts, set crews, crank shafts, ball bearings, hand tools and springs.	



Rust Preventives					
Туре	Petronas Grade	cSt at 40°C	Indoor- storage	Outdoor- storage	Recommendation
	Logamol ECT-L	2	2 month	1 month	Water wet components after cutting or aqueous wash.
Dewatering	Logamol ECT 10	2	2 month	1 month	Water wet components after cutting or aqueous wash. Nuts, Bolts, Bearings, Bars, Tubes, Machine tools. EC 10S is a mild odour product which also has high flash point (90°).
Greasy	Logamol RG 20	3	5 month	4 month	Valuable machine & tools

Cleaners		
Application	Petronas Grade	Product Description
Water based	Mecaclean EXP	High pressure industrial cleaners, working at pressures up to 300 bar on all ferrous components, aluminum and aluminum alloys.

# **MACHINERY LUBRICATION**

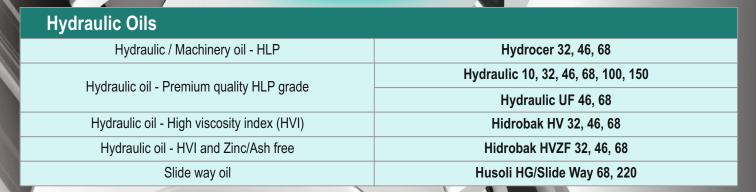

Gear Oils	
Gear oil - EP type	Gear MEP IND 68, 100, 150, 220, 320, 460, 680, 1000
Synthetic gear oil - PAO based	Gear SYN PAO 150, 220, 320, 460
Synthetic gear oil - PAG based	Gear SYN PAG 150, 220, 320, 460

Compressor Oil	
Screw air compressor oil	Compressor Oil AM2/AM4
Synthetic screw air compressor oil	Compressor A SYN PAO, SYN PAO VG 46, 68, 100, 150
Refrigeration compressor oil	Pressol LTM 68

Turbine Oil	
Lubrication of steam, gas and hydraulic turbines	Jenteram G 32, 46, 68




Thermic Fluid	
Danol XHT 24	Syntheic heat transfer oil, operating temperature upto 320°C. Thermic fluid for heat transfer system used in textile, pharmaceutical, chemical and process industries.
HTO 32	Mineral heat transfer oil, operating temperature upto 280°C.

### **GEAR & TRANSMISSION OILS**

Transmission Oil					
Urania CF 10W (SAE 10W)	API CF/SF, MB228.0, Allison C-3	Mono grade mineral based engine oil for heavy duty diesel engines.			
Tutela Transmission EPYX Series	API GL-4 (SAE 90,140, 80W90)	Specific multi grade lubricant for manual gearboxes and differential with hypoid gears of all the types of motor vehicles where lubricants with Extreme Pressure (EP) characteristics are demanded.			
Tutela Transmission W90/M-DA	API GL-5 (SAE 80W-90)	Axle fluid for any vehicle applications. It is suitable for differentials with hypoid gears and steering boxes where lubrication with Extreme Pressure (EP) characteristics is required			
Tutela Transmission W140/M-DA	API GL-5 (SAE 85W-140)	Fluid for mechanical transmissions of cars, commercial vehicles, industrial vehicles, construction and suitable for use in gears and differentials with hypoid gears and steering boxes, wherever lubrication with EP is required.			
Tutela GI/A	DEXRON II	Transmission oil for hydrodynamic, hydrostatic gear boxes of industrial vehicles, tractors, combines and agricultural machinery.			
Petronas ATF D III	General Motors DEXRON IIIG Allison C-4	Use in all automatic transmissions, power steering and other hydraulic systems for which a DexronIII or AllisonC-4 type fluids are specified. It is also suitable for use in hydrostatic drive s and industrial, agricultural, mining and marine hydraulics systems.			

### **Universal Tractor Transmission Oil (UTTO)**

Akros Multi UTTO (SAE-10W-30, 20W-30) Wet Brakes API GL-4 CNH MAT 3509 John Deere JDM J20C High performance fluids for use in transmissions, hydraulic systems, oil immersed brakes of tractors & off-road equipment, quarrying and used final drives and hydraulic systems and to optimize the performance of agricultural and commercial tractors.

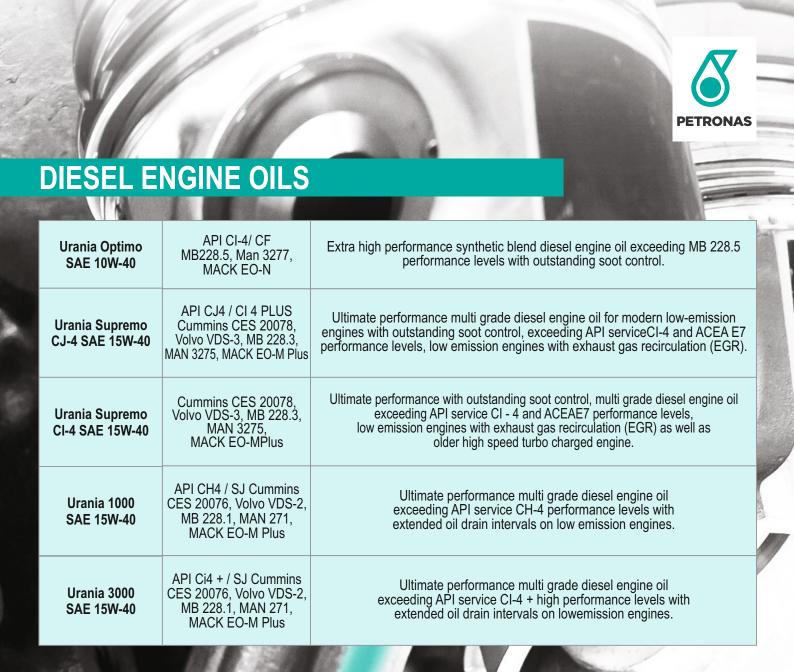

### **GAS ENGINE OILS**

**PETRONAS GEO NG** 

Excellent TBN retention & excellent engine cleanliness with great oxidation and nitration stability. High anti-wear and rust protection. Specially developed for the lubrication of a wide range of spark-ignited gas-fueled engines in order to improve fuel efficiency and reduce emissions.

**PETRONAS GEO BLG** 

Excellent TBN retention & excellent engine cleanliness. It is premium performance bio and landfill gas engine oil specially developed for bio and landfill applications. Excellent anti-wear and anti-scuff protection with high oxidation and nitration stability. High rust and corrosion protection.



### **GREASES**

Tutela MR3	Lithium soft & stringy texture	Special multi -purpose lithium grease for heavy commercial vehicle wheel hubbearing and lubrication of heavy commercial vehicles which does not require specific grease.
Tutela Jota MP3	Lithium multi-purpose	High viscosity index premium quality base for heavy or shock loading multi-purpose grease.
Tutela Jota EP00, EP0, EP2	Lithium extreme pressure	General multi-purpose EP grease for industrial applications, adhesiveness & resistance to water washout.
Tutela Jota Ind Mo2	Lithium (Moly grease, EP)	Multipurpose grease with MOS2 as EP additive to avoid shock load & noise, anti-scuffing, water resistance, longer life.
Tutela Jota Com 2/LIX-2-170	Li-Complex multipurpose EPgrease	Li-complex grease with EP for load carrying ability, rust- corrosion resistance, shear stability, lease oil separating, component life.
Grease CASX	Calcium Sulphonate component	Hightemp+180°C-low torque, long life, low bearing wear & corrosion, high load carrying ability, protection and good water resistance, for hot electric motor, fan & bearings mill.

### **COOLANT**

Profar/ Profar Ready	JIS K 2234, ASTM D3306	Areadytouse Ethylene Glycol based protective fluid for radiators, cooling systems of motor vehicle, light and heavy commercial vehicles, tractors and earth-moving machinery.
Profar OT (Concentrate)	JIS K 2234,ASTM D3306 / 4985/6210	It is a concentrated Ethylene Glycol protective fluid forradiators, cooling systems of car, light and heavy commercial vehicles, tractors & earth-moving machinery.



Regd. Office at Unit No.603, C Wing, 6th Floor, Corporate Avenue, Opp. Solitaire Corporate Park, Chakala, Andheri (East), Mumbai - 400 093. Maharashtra.

Tel. : (022) 6771 7500 , Fax : (22) 6725 7457



#### North Regional Office:

Office No. 18-20, 9th Floor, Hindustan Times House, kasturaba Gandhi Marg, Connaught Place, New Delhi - 110001. Tel: (011) 4057 0594 / 662 / 667

#### East Regional Office:

Unit 404, 4th Floor, Vasundhara Bldg., 2/7, Sarat Bose Road, Kolkata - 700 020. Tel: +91 33 6459 1677- 85, Fax: +91 33 4003 3626

### **South Regional Office:** 210, Il Floor, Front Wing,

210, Il Floor, Front Wing, Seethakathi Business Centre, Anna Salai, Chennai - 600 006. Tel: +91 44 4269 7649 - 54, Fax: +91 44 42697652