-MFG. INFORMATION 2'-0" LONG-ASTM STAMP, SN# & MAX LOAD INFO #3 REBAR 1'-8 1/2" -2'-0" LONG MODEL# & WIRE CAGE (TYP.)-AROUND SIDES AND (4) 5'-0" LONG (4) 10'-0" LONG-DATE STAMP #3 REBAR #3 REBARS #3 REBARS ON BOTTOM OF TANK **TOP VIEW**

(RISER & SAFTEY COVERS REMOVED)

REMOVABLE-COVERS —24 X 6" RISER 20 X 6" RISER— REMOVABLE -SAFTEY COVERS TEE BAFFEL ----AT INLET INLET FLOW LINE — —INVERT FLOW LINE 4" ± (TYP.)— 4" AIR GAP @ CL— INLET INVERT OUTLET INVERT 3" WALL (TYP.) —4" ± (TYP.)

SECTION A-A


NOTES

- 1. JOINT SEALANT IS BUTYL RUBBER MASTIC TYPE SEAL THAT CONFORMS TO LATEST AASHTO SPECIFICATION M-198. MEETS FEDERAL SPECIFICATION SS-S-0021(210-A).
- 2. REINFORCING STEEL REBAR CONFORMS TO LATEST ASTM SPECIFICATION A615.
- 3. REINFORCING STEEL WELDED WIRE FABRIC CONFORMS TO LATEST ASTM SPECIFICATION A185.
- 4. CONCRETE COMPRESSIVE STRENGTH 4500 PSI AT 28 DAYS.
- **5.** METHOD OF MANUFACTURE: WET CAST.
- **6.** SECTIONS ARE MONOLITHIC.

BUTYL JOINT—

SEALANT

- 7. PIPE INLET AND OUTLET SEALS CONFORM TO ASTM C 1944 OR 923.
- 8. ALL CONCRETE AND PLASTIC COVERS HAVE TANK ENTRY WARNING PLACARDS. (TWO COMPARTMENT TANK AND DANGER POISON GAS)
- 9. ALL PLASTIC HANDLES HAVE REBAR ATTACHED.
- 10. MAXIMUM 4 FEET OF COVER OVER TANK.
- 11. OUTLET FILTER CAN BE ORDERED FOR ADDITIONAL COST.
- 12. USE OF SCHEDULE 40 PIPE (MEETING ASTM-D1786 OR 2665) OR INTERNAL PIPE SUPPORTS ARE REQUIRED WHEN UTILIZING SIDE ENTRY PORTS AT INLET END.
- 13. CONCRETE COVERS MUST REMAIN IN PLACE UNLESS A SECONDARY SAFETY DEVICE IS INSTALLED.

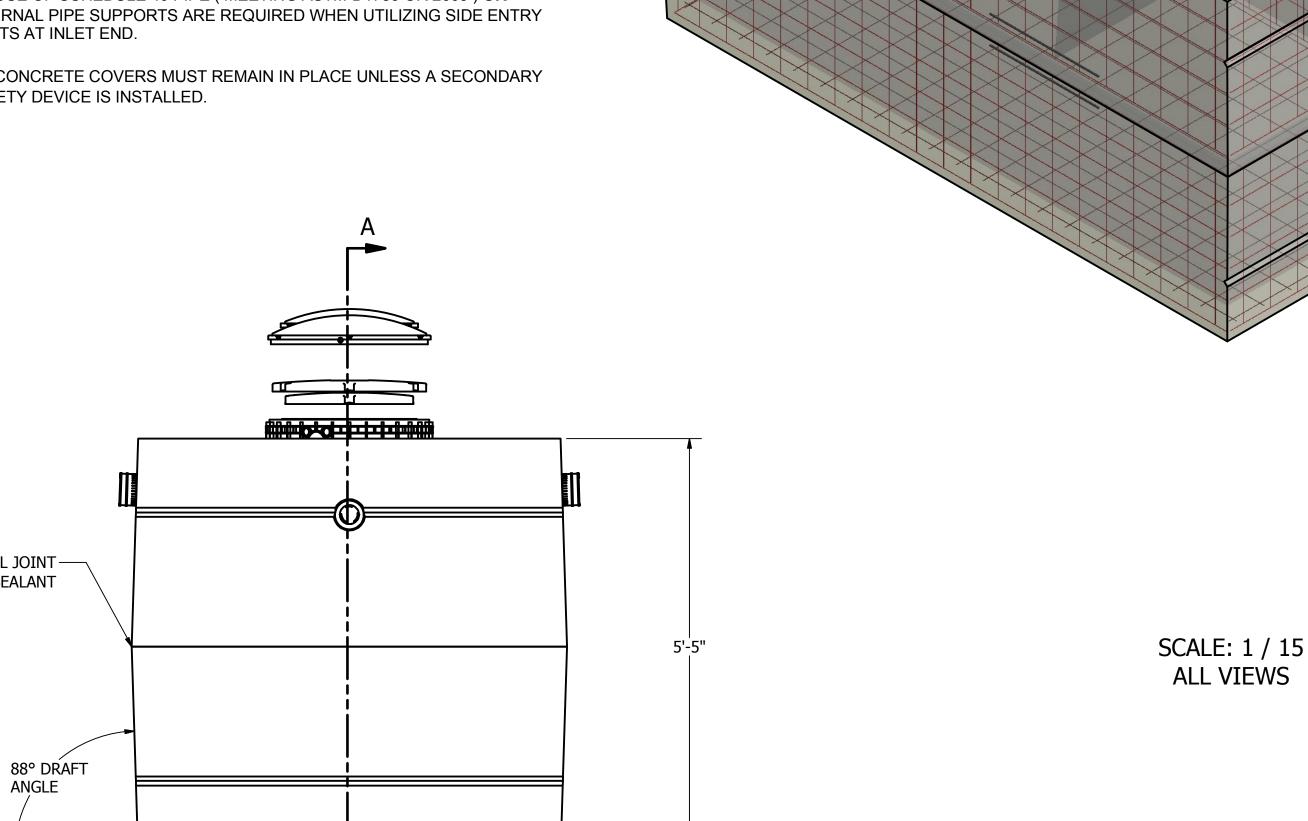

CONNECTICUT CONCRETE PRODUCTS, LLC

TANK DESIGN SPECIFICATION CONFORMS TO

LATEST ASTM DESIGNATION C1227.

Land Control of the C	
THIRD ANGLE PROJECTION	DIMENSIONS ARE IN INCHES TOLERANCES UNLESS NOTED: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.005
	ANGLES
PROPRIETARY AND CONFIDENTIAL	MACH ± 0.5' BEND ± 2.0'
THE INFORMATION CONTAINED IN THIS	DRILLED HOLES +0.010/-0.000
DRAWING IS THE SOLE PROPERTY OF MILROY & COMPANY, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MILROY & COMPANY, LLC. IS PROHIBITED.	SURFACE FINISH AS REQUIRED BY TOLERANCE UNLESS NOTED OTHERWISE

DRAWN R Campbell	12/6/2016	10 MEADOW LANE, STAFFORD SPRINGS, CT 06076					
CHECKED		PHONE 860-851-9132 Visit: precastct.com					
		TITLE					
QA							
MFG		1500 GALLON PUMP CHAMBER					
APPROVED		1					
		SIZE		TI	DWG NO		R
EST MASS LBS. 11,400) +- 5%	D			1500 GAL-PC		

SHEET 1 OF 1