


MULTI-FUNCTIONAL SOLAR LAMP with Mobile Phone Charger



Made with
RECYCLED PLASTIC

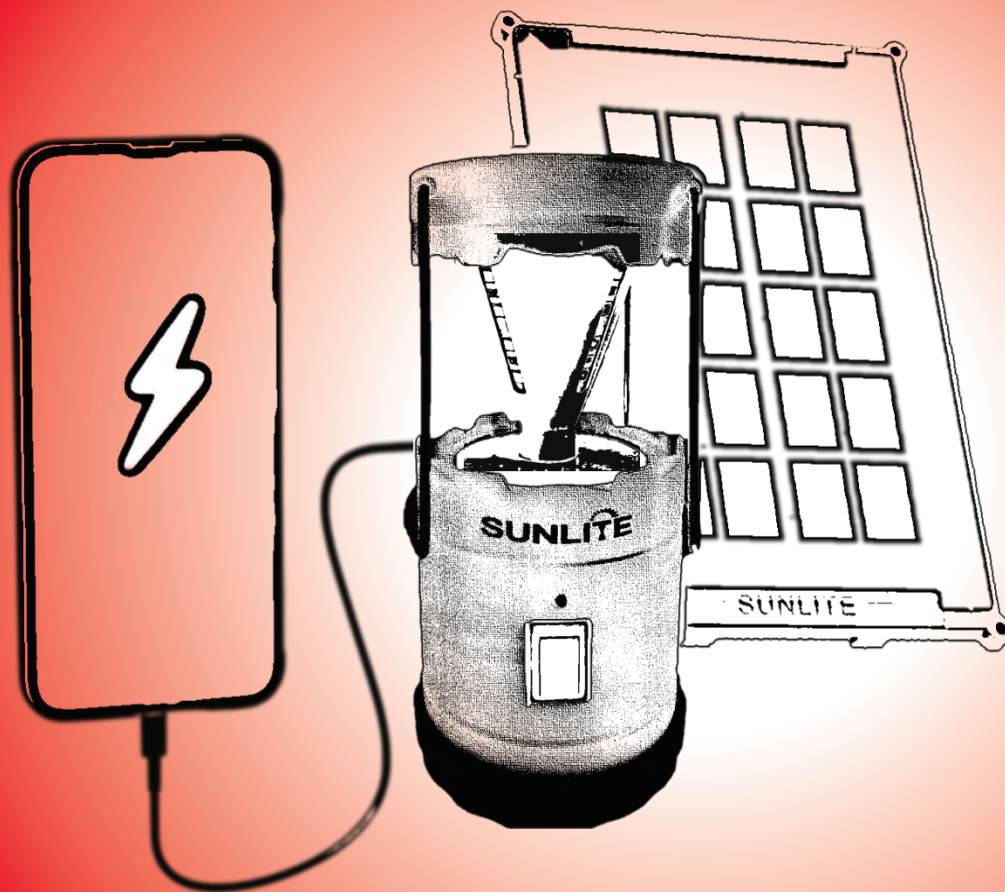

Solar Charge
Indication



Battery Level
Indication



Easy Battery
Replacement



USB Mobile
Charging



Shock-Proof
Plastic Casing



Rain
Resistant

2 Wp

Solar Panel with 3m cable
and Micro-USB connector

3.7V 1800 mAh

Rechargeable Li-ion Battery
with a 6.66Wh capacity

5V 1A

USB-A Outlet Port
for Mobile Charging

220V AC

Electrical Charger
(separate)

3

Light Modes *

3 h

HIGH

4.5 h

MEDIUM




6 h

LOW

* Mobile Charging reduces light hours

3 Light Modes with 360 degree (omnidirectional) light

foldable metal handles for multi-purpose use, both fixed & portable

<p>①</p> <h2>HIGH</h2> <p>28 LUX</p>  <p>3 h</p>	<p>②</p> <h2>MEDIUM</h2> <p>16 LUX</p>  <p>4.5 h</p>	<p>③</p> <h2>LOW</h2> <p>5 LUX</p>  <p>6 h</p>
--	---	--


AVG. BRIGHTNESS
(after 12 hrs solar charge) **LUX ***

High	
at beginning	28
after 2 hrs	17
after 3 hrs	9
Medium	
at beginning	16
after 2.5 hrs	9
after 4.5 hrs	5
Low	
after 4 hrs	5
after 6 hrs	2

* LUX measured at 1m distance from lamp, on the same surface where the lamp is standing


Battery Status Indicator (BSI) & Other Features for user-friendliness

BSI: During Solar / AC Charging




Whilst charging = RED
Fully charged = GREEN

BSI: During Lamp Use



Well charged = GREEN
Needs charging = RED

BSI: During Mobile Phone Charging



Mobile Charging = RED/GREEN toggles
Note: Lamp LED's go OFF to save power



Micro-USB connector of Solar Panel can be used to directly charge mobile phones as well @ 5V output



Battery with low self-discharge & 500+ cycle lifespan; Auto-protection against deep discharge & overcharge

Designed to Maximize Container Loadability

container	euro-palletized	non-palletized
20'DC	5,400 pcs	6,580 pcs
40'DC	10,800 pcs	13,590 pcs
40'HC	10,800 pcs	15,100 pcs



SUNLITE

MANUFACTURED BY
INDIA IMPEX

SAGAR@SUNLITE-SOLAR.COM

MADE IN INDIA