


Taylor Air Tools

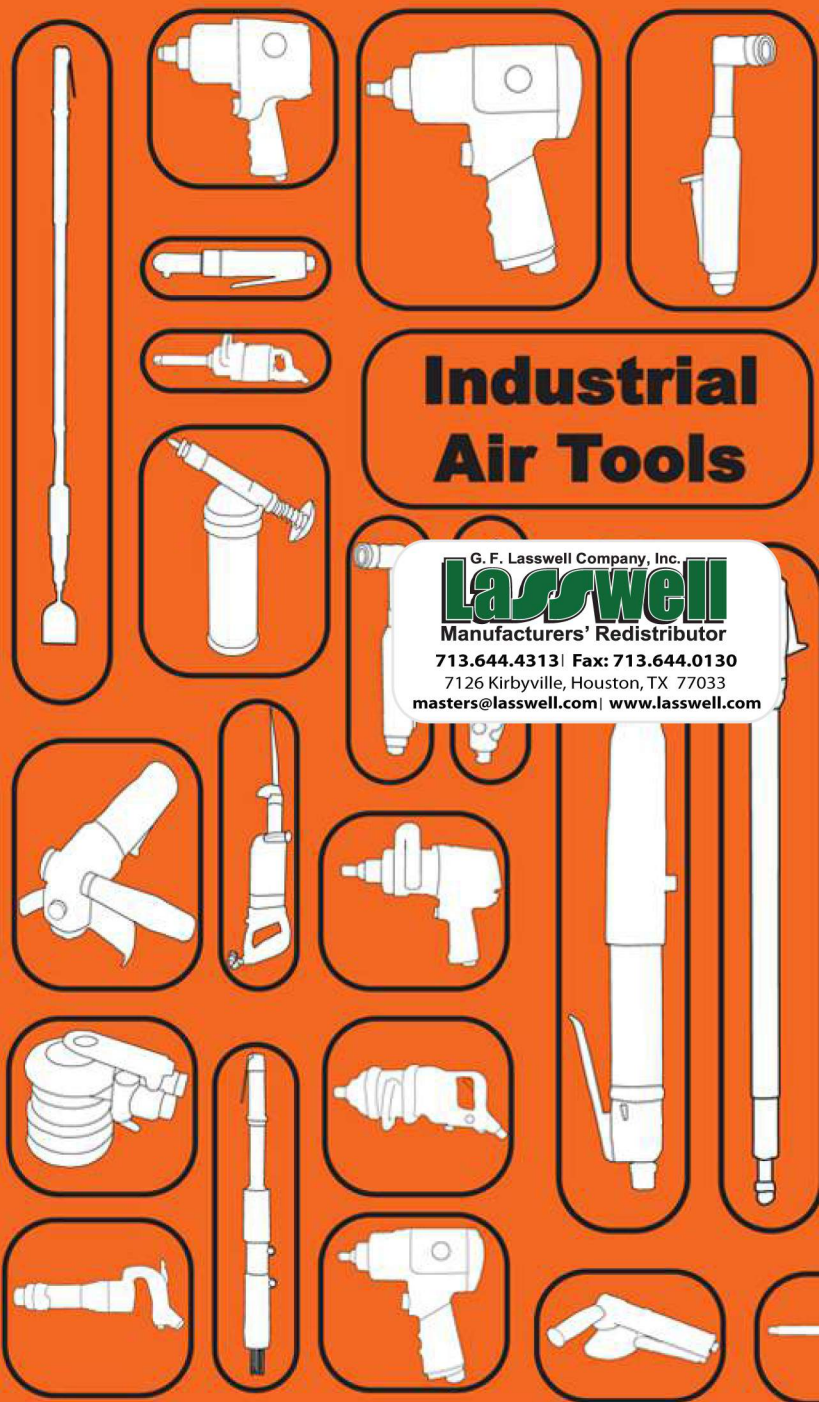

Industrial Air Tools

G. F. Lasswell Company, Inc.
Lasswell
 Manufacturers' Redistributor
 713.644.4313 | Fax: 713.644.0130
 7126 Kirbyville, Houston, TX 77033
 masters@lasswell.com | www.lasswell.com

OVER 450 TOOL MODELS FOR:

- SANDING
- GRINDING
- TIGHTENING
- LOOSENING
- SAWING
- HAMMERING
- SQUEEZING
- RIVETING
- SCALING
- DRIVING
- DRIVING SCREWS
- BRUSHING
- CUTTING
- SHEARING
- POLISHING
- SCRAPING
- PEENING
- DEBURRING
- SPRAYING
- SCRIBING
- CAULKING
- FILING
- NIBBLING
- NAILING
- ROUTING
- SMOOTHING
- TAPPING
- CHIPPING



TAYLOR PNEUMATIC TOOL COMPANY

Volume 19

Taylor

see our website at www.taylorpneumatic.com

Shipping & Repairs: 505 N. Railroad Ave., Boynton Beach, Florida 33435

Mail: P.O. Box 1117 Boynton Beach, Florida 33425

PH: (561) 732-1111 Toll Free: (800) 805-8665

Fax: (561) 731-4412 e-mail: airtool@taylorpneumatic.com

email orders to: orderdesk@taylorpneumatic.com



The Taylor family has a long history in the air tool business. My father Jim Taylor started manufacturing air tools from scratch in 1962. The intricacies and engineering of metalworking and tool and die work was learned from the ground up. I grew up in this environment learning what industrial designs worked as different tool applications were requested and manufactured. Our successful family pneumatic tool business was then sold in 1984.


Having never gotten the tool business out of my blood, in 1993 with my sons, Dave Jr. and Brad (the third generation) Taylor Pneumatic was started. Cumulatively, we have over 90 years of tool expertise between us. We have put together a full line of pneumatic tools to be used across many different industries at reasonable price points, and are constantly adding more.

The experience and knowledge we have gained over the years has allowed us to improve the standards we have for our tools. Tools are made to our specifications in factories we have worked with for years. We understand quality tools make a difference and that sets us apart from our competitors. We sell the best product, not always the cheapest.







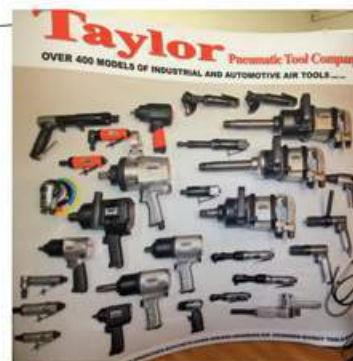









Quality and customer service are our top priorities. This allows us to form long and positive business relationships. Our complete line is in stock and we typically ship same day 98% of the time. We stand behind our products with a full inventory of parts. Our repair department provides services in a timely manner at our Florida facility.

With our large in-stock inventory, we are sure to have a tool to meet your needs. Give us a call, buy some great tools, and make a new friend.

Dave Taylor, Sr.
President
Taylor Pneumatic Tool Company



Building the future since 1993

Accessories		22-23, 27, 33-35, 42, 52-53, 58-60, 63-65, 69-72, 76, 81-82, 84-85, 90-92, 94, 96
Belt Sanders		28-31
Cutoff Tools		42-43
Die Grinders		73-83
Drills		43-52
Grinders		36-41, 51
Hammers		58-64, 70-71, 94
Impact Wrenches		4-13
Polishers		24-27, 51
Ratchet Wrenches		14-15
Riveters		85-87
Sanders		16-33
Saws		92
Scalers		65-71
Screwdrivers		54-57
Specialty Tools		88-91, 93, 95, 97-98
Index By Tool Number		99

1/4" & 3/8" IMPACT WRENCHES

Taylor

T-7725T

1/4" Impact Wrench



40 ft.lbs. Torque

- * Double swinging weight clutch
- * O-ring supported socket retainer
- * Protective rubber scuff
- * Built-in regulator

Small, lightweight and comfortable, the T-7725T 1/4" Impact is great for all types of assembly operations involving small fasteners. Excellent for transmission and body shops and all general mechanical work. Narrow profile reaches into tight spots.

T-6739

3/8" Impact Wrench

- High torque twin hammer clutch

A 3/8" impact wrench with the power of a 1/2" tool. 3 piece housing allows easy access for maintenance and repair. Twin hammer clutch delivers top power in a lightweight aluminum housing. Made for production. Built-in regulator.



500 ft.lbs. Torque

Available with
1/2" anvil as
T-6749

T-7724

3/8" Impact Wrench



100 ft.lbs. Torque

- Double swinging weight clutch

The T-7724 has a convenient forward and reverse switch. The swinging weight clutch is designed for maximum durability.

MODELS	SQ. DRIVE	WEIGHT lbs.	LENGTH in.	WORKING TORQUE	MAX TORQUE	AIR PRESSURE	AVERAGE AIR CONS.	AIR CONS. @ LOAD	AIR INLET NPT
T-6739	3/8"	3.65	6.5	400	500	90 PSI MAX	4	15	1/4"
T-7720N	3/8"	2	6.25	115	125	90 PSI MAX	4	13	1/4"
T-7724	3/8"	2	6.25	90	100	90 PSI MAX	3	12	1/4"
T-7725T	1/4"	2.2	5	35	40	90 PSI MAX	2	8	1/4"
T-7739	3/8"	3.4	6.5	200	220	90 PSI MAX	4	15	1/4"
T-7744A	3/8"	3	6.5	150	160	90 PSI MAX	3	13	1/4"
T-8820AH	3/8"	2.89	8.54	35	40	90 PSI MAX	3	12	1/4"
T-8839	3/8"	2.8	6.5	260	280	90 PSI MAX	4	15	1/4"
T-9920	3/8"	2.5	6.75	160	175	90 PSI MAX	4.5	14	1/4"
T-9939	3/8"	3.05	3.7	450	500	90 PSI MAX	5	16	1/4"

T-7720N

3/8" Butterfly Impact



125 ft.lbs. Torque

- Double swinging weight clutch

Small, lightweight and comfortable, the T-7720N 3/8" Butterfly and the T-9920 3/8" Butterfly Impacts are great for all types of assembly operations involving small fasteners. Excellent for transmission and body shops and all general mechanical work including production assembly. Both tools feature a 360 degree swivel regulator. Their compact size lets you reach the tightest areas.

T-9920

3/8" Butterfly Impact



175 ft.lbs. Torque

T-7744A

3/8" Impact Wrench

Easy to use, the T-7744A has a precision motor & clutch for long life. Comfort grip, graduated regulator and convenient forward and reverse lever.

160 ft.lbs. Torque



T-7739

3/8" Impact Wrench

Comfortable grip and trigger, the T-7739 is a reliable 3/8" impact for production. Twin hammer clutch is powerful and long lasting. Built-in regulator.

220 ft.lbs. Torque

Hi Torque Twin hammer clutch



T-9939

3/8" Super Duty Impact Wrench

500 ft.lbs. Torque

The T-9939 has a super duty twin hammer clutch and delivers tremendous torque versus its small size and narrow profile. The perfect impact wrench for the tightest places. Built-in regulator.



Available with 1/2" anvil as T-9939A



T-8839

3/8" Impact Wrench

Available with 1/2" anvil as T-8839A

Hi Torque Twin hammer clutch

Compact, lightweight and hard hitting. The T-8839 and T-8839A have composite housings that are ideal for your toughest job. Twin hammer clutches have lots of power. Tool exhausts through the bottom of the handle. Built-in regulator.

280 ft.lbs. Torque



40 ft.lbs. Torque

Low profile angle head to get into tight places other impact wrenches can't. Lever throttle for precise control. Comes with rear hanger. Built-in regulator.

- Pin and "O" Ring socket retainer
- Double swing weight clutch

T-8820AH

3/8" Angle Impact Wrench



1/2" IMPACT WRENCHES

Taylor

T-6231

**Heavy Duty
1/2" Impact Wrench**



**650 ft.lbs.
Torque**

The T-6231 is designed for tire work, but ideal for assembly and MRO applications. T-6231L has an extended anvil. Taylor Pneumatic tools are manufactured to exacting standards to meet the needs of the MANUFACTURING, METAL WORKING, ENERGY MARKETS and the AUTOMOTIVE AFTERMARKET. These tools are ideal for mining, petrochemical, oilfield & power plant applications as well as use in shipyards, railyard applications, metal working, foundries, heavy production use and truck and automotive tire repair.

T-6231L

2" Extended Anvil

- 1/2" Heavy Duty Impact Wrench
- Built-in Regulators
- Long Life Twin Hammer Clutch
- Ring Type Socket Retainer
- High Performance Motor
- Rubber Cushion Grip

T-7734

1/2" Impact Wrench

**325 ft.lbs.
Torque**



T-7734L

2" Extended Anvil

Lightweight and compact these Impact Wrenches are ideal for general duty automotive applications.

T-6749

**Super Duty
1/2" Impact Wrench**

**500 ft.lbs.
Torque**



The T-6749 has a hard hitting Twin Hammer Clutch design that delivers plenty of power in a small frame. The 3 piece housing allows easy access for maintenance and repair.

- *Forward and reverse
- *Built-in regulator
- *Sturdy Aluminum Housing

T-9939A

**1/2" Super Duty
Impact Wrench**

Available with 3/8" anvil as T-9939



The T-9939A has a super duty twin hammer clutch and delivers tremendous torque versus its small size and narrow profile. The perfect impact wrench for the tightest places.

**500 ft.lbs.
Torque**



T-7231N

**1/2" Heavy Duty
Impact Wrench**

**425 ft.lbs.
Torque**

- Built-in regulator
- Long life twin hammer clutch
- Ring type socket retainer
- High performance motor
- Light weight aluminum handle
- Comfort grip
- Convenient forward and reverse



T-7231NL

2" Extended Anvil

MODELS	SQ. DRIVE	WEIGHT lbs.	LENGTH in.	WORKING TORQUE	MAX TORQUE	AIR PRESSURE	AVERAGE AIR CONS. @ LOAD	AIR CONS. @ LOAD	AIR INLET NPT
T-6231 & T-6231L	1/2"	5.625 & 5.75,	6.75 & 8.5	550	650	90 PSI MAX	5	19	1/4"
T-6749	1/2"	3.70	6.5	400	500	90 PSI MAX	4	17	1/4"
T-7231N & T-7231NL	1/2"	5.625 & 5.75	6.75 & 8.125	400	425	90 PSI MAX	5	19	1/4"
T-7734 & T-7734L	1/2"	5.25	6.75 & 8.125	275	325	90 PSI MAX	4	15	1/4"
T-7745 & T-7745L	1/2"	5 & 5.25	6.75 & 8.125	375	425	90 PSI MAX	4	15	1/4"
T-7749 & T-7749L	1/2"	5.8 & 6	6.5 & 8	450/550	500f/600r	90 PSI MAX	5	19	1/4"
T-8834AH	1/2"	11.2	14.75	180	220	90 PSI MAX	6	21	1/4"
T-8834S	1/2"	4.5	12.75	250	310	90 PSI MAX	5	21	1/4"
T-8849, 8849L, 8849P	1/2"	5.3	7.25	900	1000	90 PSI MAX	5	23	1/4"
T-9939A	1/2"	3.05	3.8	425	500	90 PSI MAX	3	13	1/4"
T-9949	1/2"	7.4	7.25	1050	1150	90 PSI MAX	6	21	1/4"

T-7745

1/2" Heavy Duty Impact Wrench

The T-7745 & T-7745L have built-in regulators, ring type socket retainers, high torque clutches and convenient forward and reverse.

425 ft.lbs. Torque



T-7745L

2" Extended Anvil

310 ft.lbs. Torque

T-8834S

1/2" Straight Impact Wrench



T-8834AH

220 ft.lbs. Torque

1/2" Angle Head Impact Wrench

Great for tight spots. Low profile angle head reaches areas not accessible by other impacts. Both tools have built in regulators.

T-7749

Super Duty 1/2" Impact Wrench

The T-7749 has a steel clutch cover for use in demanding applications. A strong tool with 500 ft.lbs torque in forward and 600 ft.lbs. in reverse.



T-7749L

2" Extended Anvil

600 ft.lbs. Torque

All of our 1/2" IMPACTS have built-in regulators

These tools are ideal for applications in the mining, petrochemical, oilfield and power plant applications as well as use in shipyards, metal working, foundries, heavy production use, railyard applications and truck and automotive tire repair.



T-8849

1/2" SD Impact Wrench

1000 ft.lbs. Torque



T-8849L

2" Extended Anvil



Pin type socket retainers available in T-8849 as an optional extra. These tools are built for power plants and facilities needing high torque and low weight. Order model T-8849P.

The T-8849 and T-9949 have composite housings developed to provide maximum torque with minimum weight.

T-9949

1/2" SD Impact Wrench

The T-9949 is our latest addition. Hard hitting, long lasting quality clutch has the most torque of any of our 1/2" impact wrenches



1150 ft.lbs. Torque

3/4" IMPACT WRENCHES

Taylor

T-6775

3/4" Super Duty Impact Wrench

- *Built-in Regulator
- *1200 ft.lbs. Working Torque
1400 ft.lbs Max.
- *Long Life Twin Hammer Clutch
- *Ring Type Socket Retainer
- *High Torque to Weight Ratio
- *Aluminum Housing for Long Life

The T-6775 & T-6775L are economical 3/4" high torque impact wrenches that are built to last. Quality castings, end plates and clutch mechanism. These tools have the same great warranty as all of our impact wrenches.



T-6775L

T-7772

3/4" Impact Wrench

700 ft.lbs. Torque



T-7772L

Power is the secret to the popularity of the T-7772. This wrench is excellent for heavy duty fasteners and lug nuts. 1" bolt capacity takes on the toughest farm equipment, RV's, trucks and buses.



T-9988S

T-7775

T-8849A

T-8875

T-7773

T-7773L

MODELS	SQ. DRIVE	WEIGHT lbs.	LENGTH in.	WORKING TORQUE	MAX TORQUE	AIR PRESSURE	AVERAGE AIR CONS. AIR CONS.	AIR CONS. @ LOAD	AIR INLET NPT
T-6775 & L	3/4"	10.6 & 11.2	9.25 & 11.25	1200	1400	90 PSI MAX	8	31	3/8"
T-7772 & L	3/4"	10.5 & 11.75	8.75 & 14.75	650	700	90 PSI MAX	6	24	1/4"
T-7773 & L	3/4"	11.5 & 12.75	10.75 & 13.5	850	900	90 PSI MAX	7	26	1/4"
T-7774 & L	3/4"	10.2 & 11.45	9.5 & 11.5	850	900	90 PSI MAX	6	24	1/4"
T-7775	3/4"	11.22	11.8	1300	1500	90 PSI MAX	9	36	3/8"
T-8849A	3/4"	4.85	8	950	1000	90 PSI MAX	7	26	1/4"
T-8875	3/4"	7.9	9	1100	1200	90 PSI MAX	8	24	3/8"
T-9988S	3/4"	11.22	14	900	1000	90 PSI MAX	12	42	3/8"

T-8849A

3/4" Super Duty Impact Wrench

1000 ft.lbs. Torque



T-8875

3/4" Super Duty Impact Wrench

1200 ft.lbs. Torque



Compact, lightweight and hard hitting. These composite tools are ideal for all your toughest jobs. With torque from 1000 ft.lbs for the T-8849A and 1200 ft.lbs for the T-8875, these are the perfect tools for utility companies and refineries. Composite handle and body are tough and long lasting. Long lasting "Twin Hammer" clutch in both models.



The T-7773 3/4" Impact Wrench features 900 ft.lbs. of torque for those really tough jobs. A precision impact clutch and motor for long life under heavy duty conditions, and built-in regulator for speed control. Exhaust is through the bottom of the handle and away from the operator.



Our Best 3/4" Impact

- *Twin Hammer Clutch delivers high performance and durability
- *For use in applications such as maintenance or assembly of heavy equipment, trucks, buses, RV's, construction and farm equipment
- *Steel Clutch Housing
- *1500 ft.lbs. of Torque
- *Teasing Throttle
- *Cushion grip
- *Exhausts next to air inlet



All of our 3/4" IMPACTS have built-in regulators

Twin Hammer Clutch in the T-9988S delivers high performance and durability. Great for industrial applications. Side handle for added stability.

1" IMPACT WRENCHES

Taylor

1600 ft.lbs. Torque

The T-6794 delivers 1,600 ft.lbs. of max torque. The auxiliary handle can be rotated left, right or on top to provide the operator with maximum comfort. The 3 piece housing allows easy access for maintenance and repair. Hard hitting Twin Hammer Clutch design delivers plenty of power in a small frame.

T-6794
1" Super Duty Impact Wrench

T-6794-6
1" Super Duty Pistol Grip Impact



T-6796

Super Duty 1" Pistol Grip Impact Wrench

1800 ft.lbs. Torque

T-6796-6
Super Duty 1" Pistol Grip Impact Wrench With 6" Extended Anvil



T-6796L-6

Super Duty 1" Straight Impact Wrench With 6" Extended Anvil

1900 ft.lbs. Torque

- Super Duty 1" Impact Wrenches**
- *Heavy Duty Pinless Clutches
 - *Very High Torque and Dependability
 - *Inside Trigger with Teasing Throttle
 - *Aluminum Housing for Long Life
 - *Three Position Power Settings in Forward and Reverse

T-6796L

Super Duty 1" Straight Impact Wrench



T-6799L-6

HI TORQUE Super Duty 1" Straight Impact With 6" Extended Anvil

2750 ft.lbs. Torque

T-6799L

HI TORQUE Super Duty 1" Straight Impact



Super Heavy Duty 1" Impacts. The T-6796, T-6796-6, T-6796L, T-6796L6, T-6799L & T-6799L-6 all have Hi Torque PINLESS clutches that deliver plenty of power when you need it. These tools are ideal for mining, petrochemical, oilfield & power plant applications as well as use in shipyards, railyard applications, metal working, foundries, heavy production use and truck and automotive tire repair.



T-7796AN

T-7796AN-6

T-7796LAN

T-7796LAN-6

T-6794

T-6794-6

T-7794

T-7794 1300 ft.lbs. Torque
1" Heavy Duty Impact Wrench



- *Built-in regulator
- *Ring type socket retainer
- *Long lasting high torque clutch
- *Convenient forward and reverse

T-8894 1500 ft.lbs. Torque
1" Super Duty Impact Wrench

Compact, lightweight and hard hitting. This composite tool is ideal for all your toughest jobs. With torque of 1500 foot pounds and weight of 11.22 lbs. it is great for chemical plants and utilities. Long lasting "Twin Hammer" clutch.



T-7796LAN-6 1800 ft.lbs. Torque
1" Straight Handle Impact Wrench With 6" Extended Anvil



T-7796LAN
1" Straight Handle Impact Wrench



T-7796AN 1800 ft.lbs. Torque
1" Pistol Grip Impact Wrench



T-7796AN-6
1" Pistol Grip Impact Wrench



These 1" Impacts develop 1,800 ft.lbs. of torque with a twin hammer clutch. Light in weight for the torque they produce. A combination of aluminum handles and steel clutch housings. Auxillary handles are adjustable 360degrees. The T-7796LAN and the T-7796LAN-6 have an optional throttle lever available that can change the tool from inside trigger to outside configuration to suit the users preference.

MODELS	SQ. DRIVE inch	WEIGHT lbs.	LENGTH inch	WORKING TORQUE	MAX TORQUE	AIR PRESSURE	AVERAGE AIR CONS. AIR CONS. @ LOAD	AIR INLET NPT
T-6794	1	15.4	10	1500	1600	90 PSI MAX	18 36	3/8"
T-6794-6	1	18.4	15	1500	1600	90 PSI MAX	18 36	3/8"
T-6796 & T-6796-6	1	21.8 & 25.3	11.5 & 19.5	1650	1800	90 PSI MAX	10 42	1/2"
T-6796L & T-6796L-6	1	21.8 & 28	16.5 & 28	1600	1900	90 PSI MAX	10 42	1/2"
T-6799L & T-6799L-6	1	36 & 42	22.5 & 30	2500	2750	90 PSI MAX	13 52	1/2"
T-7794	1	11.2	9.5	1150	1300	90 PSI MAX	7 29	1/4"
T-7796AN & AN-6	1	18.2 & 20.2	11 & 17	1650	1800	90 PSI MAX	8 33	1/2"
T-7796LAN & LAN-6	1	21.6 & 23.6	15.1 & 21.1	1650	1800	90 PSI MAX	8 33	1/2"
T-8894	1	11.22	10	1400	1500	90 PSI MAX	8 28	3/8"



T-6796-6

T-6796

T-8894

T-6796L

T-6796L-6

T-6799L

T-6799L-6

1" IMPACT WRENCHES

Taylor

T-7797L-6

1" Straight Handle Impact Wrench w/6" extended anvil



1400 FT. LBS.

T-7797L

1" Straight Handle Impact Wrench

- * Side Handles
- * Ring type socket retainers
- * Convenient forward and reverse lever

*Plenty of power for the truck tire shop.
Both tools have the double swinging weight clutch*



T-6799L-6
(See Page 10)

T-7799L

1" Super Duty Impact Wrench

T-7799L-6

1" Super Duty Impact Wrench With 8" Extended Anvil

(NOT SHOWN)

- * These 1" Impacts develop 2,500 ft.lbs. of torque with a twin hammer clutch design.
- * Rugged design for the toughest jobs
- * Convenient forward and reverse
- * Built-in regulator

**HI TORQUE
2500 FT. LBS.**



T-7798L-6

1-1/2" Straight Handle Impact Wrench

HI TORQUE 3000 FT. LBS. in a 1-1/2" Wrench



T-7798L

1-1/2" Super Duty Impact Wrench



The T-7798L and T-7798L-6 produce 3000 ft.lbs. of torque and make fast easy work out of large bolts. The twin hammer clutch delivers performance and durability. Built-in regulator, side handle and lots of power.

TWIN HAMMER CLUTCH

T-6231, T-6231L, T-6739, T-6749, T-6775, T-6775L, T-6794, T-6794-6, T-7231, T-7231L, T-7739, T-7749, T-7775, T-7796AN, T-7796AN-6, T-7796LAN, T-7796LAN-6, T-7798L, T-7798L-6, T-7799L, T-7799L-6, T-8839, T-8839A, T-8839P, T-8849, T-8849L, T-8849P, T-8875, T-8894, T-9939, T-9939A, T-9988S, T-9988S-4



PIN TYPE CLUTCH

T-7744A, T-7744S, T-7745, T-7745L, T-7772, T-7772L, T-7773, T-7773L, T-7774, T-7774L, T-7794



CLUTCH TYPES

DOUBLE SWINGING WEIGHT CLUTCH

T-7725T, T-7797L, T-7797L-6, T-8820AH, T-8834, T-8834AH



SWINGING WEIGHT CLUTCH

T-7720N, T-7724, T-7734, T-7734L, T-9920



PINLESS CLUTCH

T-6796, T-6796-6, T-6796L, T-6796L-6, T-6799L, T-6799L-6



MODELS	SQ. DRIVE inch	WEIGHT lbs.	LENGTH inch	WORKING TORQUE	MAX TORQUE	AIR PRESSURE	AVERAGE AIR CONS.	AIR CONS. @ LOAD	AIR INLET NPT
T-7797L	1	28	16.75	1250	1400	90 PSI MAX	10	60	1/2"
T-7797L-6	1	31	22.75	1250	1400	90 PSI MAX	10	69	1/2"
T-7798L	1-1/2	34.5	17.5	2800	3000	90 PSI MAX	12	50	1/2"
T-7798L-6	1-1/2	41	25.5	2800	3000	90 PSI MAX	12	50	1/2"
T-7799L	1	36.1	24.75	2300	2500	90 PSI MAX	10	55	1/2"
T-7799L-6	1	43.1	31.75	2300	2500	90 PSI MAX	10	55	1/2"

RATCHET WRENCHES 1/4" & 3/8"

Taylor

T-6825

1/4" Economy Ratchet Wrench



T-6826

3/8" Economy Ratchet Wrench



T-7825

1/4" Ratchet Wrench



T-7826

3/8" Ratchet Wrench



T-8825

1/4" Ratchet Wrench



T-8826

3/8" Ratchet Wrench / Screwdriver



**T-8826
Doubles as a
MINI
SCREWDRIVER**



T-7729

Used in hard to reach areas, such as under dashboards. The T-7826 is the same great tool as the T-7825, but with a 3/8" anvil. Production ratchets.

The T-6825 and T-6826 are economical 1/4" and 3/8" ratchets, built for general shop work.

Ratchet wrenches are exceptionally good at doing the job they are designed for - removing fasteners *after they have first been loosened*. It is important to keep the ratchet mechanism clean and free of sand and grit. Sand will wear out the ratchet mechanism and cause premature tool failure. Use an air blow gun to clean the head after extended use.

The T-8826 is a super stubby 3/8" Ratchet Wrench that fits in the palm of your hand. A 1/4" hex hole in the anvil will accept 1/4" Apex screwdriver bits. The convenience of this tool is hard to believe, reaching into places like no other.

Also available with a 1/4" anvil as the T-8825. (This tool does not have the capability to hold Apex bits.)

MODELS	SQ. DRIVE	WEIGHT lbs.	LENGTH in.	WORKING TORQUE	MAX TORQUE by hand	AIR PRESSURE	AVERAGE AIR CONS.	AIR CONS. @ LOAD	AIR INLET NPT
T-6728	3/8"	2.6	10	50	125	90 PSI MAX	4	17	1/4"
T-6729	1/2"	2.6	10	50	125	90 PSI MAX	4	17	1/4"
T-6825	1/4"	1.12	6.5	20	30	90 PSI MAX	3	12	1/4"
T-6826	3/8"	1.12	6.5	20	30	90 PSI MAX	3	12	1/4"
T-7728	3/8"	2.5	10	50	125	90 PSI MAX	4	17	1/4"
T-7729	1/2"	2.5	10	50	125	90 PSI MAX	4	17	1/4"
T-7730	1/2"	4.375	14.375	90	250	90 PSI MAX	5	21	1/4"
T-7825	1/4"	1.12	6.5	20	30	90 PSI MAX	3	12	1/4"
T-7826	3/8"	1.12	6.5	20	30	90 PSI MAX	3	12	1/4"
T-8825	1/4"	1.12	4.72	20	25	90 PSI MAX	3	11	1/4"
T-8826	3/8"	1.12	4.72	20	25	90 PSI MAX	3	11	1/4"
T-9825NK	1/4" & 3/8"	1.25	8.25	30	100	90 PSI MAX	4	12	1/4"

T-6728

3/8" Economy Ratchet Wrench



T-6729

1/2" Economy Ratchet Wrench



T-7728

3/8" Ratchet Wrench



T-7729

1/2" Ratchet Wrench



T-7730

1/2" Ratchet Wrench



- *Teasing throttle
- *Ball type socket retainer
- *Triple idler gear system
- *Light, easy to grip aluminum handle
- *3/4 HP motor

This high torque ratchet handles those tough fasteners in tight places.

Not designed to be used as a nutrunner, as damage may occur.

T-9825NK

Thru Hole Ratchet Kit 1/4" & 3/8"



The beauty of the T-9825NK is two fold. A 1/4" & a 3/8" drive are in the kit. Just remove drive and flip it around for reverse. The second part is that a set of 10 sockets are with the tool, that fit directly into the head, leaving the center open so that a threaded rod or long bolt can pass through.

Kit (T-9825NK) contains 8,10, 12, 13 & 14MM sockets as well as 5/16", 3/8", 7/16", 1/2" and 9/16" along with the tool.

Socket with 1/4" hex, accepts bits that are part of the kit.



1/4" Drive 3/8" Drive

T-6446

6" Economy Palm Grip
DA Sander 3/16" Orbit



All of our DA Sanders have our
Limited Lifetime Warranty

T-6445

5" Economy Palm Grip
DA Sander 3/16" Orbit



T-6956

6" Economy Palm Grip
DA Sander 3/16" Orbit



T-6955

5" Economy Palm Grip
DA Sander 3/16" Orbit



The T-6445 & T-6446 are small, compact and easy to use. Available with a 5" or 6" Velcro or PSA pad. Rubber grip is comfortable, and the tool is easy to use. Built-in muffler and regulator.

Taylor Pneumatic Sanders are built to provide trouble free service. Low profile and tough aluminum construction combined with smooth and balanced operation make these tools a must for automotive sanding, woodworking, and any finish work. These tools have built-in regulators and mufflers for quiet operation. Swirl free finishes are obtained by letting the tool do the work. Keep the pad flat, keep the tool moving. Adjust the pad speed with the built-in regulator. The tools have pads that move round and round and up and down because of the offset of the oscillator. Ease off on the pressure you apply and watch the pad spin backwards! The grains of abrasives do not travel the same path twice!

T-6956B

6" Economy Palm
Grip DA Sander
3/32" Orbit



T-6955B

5" Economy Palm
Grip DA Sander
3/32" Orbit



The T-6955B & T-6956B are small, compact and easy to use. They feature a 3/32" orbit for super fine sanding. They feature heavy-duty ball bearing construction, built-in regulator and a smooth powerful cutting action. The vinyl face pad makes for easy attachment of PSA sandpaper or it is available with a Velcro pad.

T-6956VAC

6" Economy Palm Grip
DA Vacuum Sander
3/16" Orbit



The T-6955VAC/6VAC are small, compact and easy to use. They feature an adjustable exhaust, heavy-duty ball bearing construction, built-in regulator and a smooth powerful cutting action. The vinyl face pad make for easy attachment of PSA sandpaper or available with Velcro Pad. The 3/16" orbit has a heavy cutting action for the most demanding work. The shroud has vacuum hookup to pull dust away from the surface of your work and comes complete with hose and bag. (Seen on right)

T-6955VAC

5" Economy Palm Grip
DA Vacuum Sander
3/16" Orbit



MODELS	FREE SPEED rpm	PAD SIZE inch	WEIGHT lbs.	ORBIT DIA. inch	SPINDLE SIZE	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-6445 & T-6446	11,000	5 & 6	2.5	3/16	5/16-24	90 PSI MAX	1/4"	8	16
T-6955 & T-6956	11,000	5 & 6	1.76	3/16	5/16-24	90 PSI MAX	1/4"	8	16
T-6955B & T-6956B	11,000	5 & 6	1.76	3/32	5/16-24	90 PSI MAX	1/4"	8	16
T-6955VAC & T-6956VAC	11,000	5 & 6	2.5	3/16	5/16-24	90 PSI MAX	1/4"	8	16
T-7445 & T-7446	6,000	5 & 6	2.2	3/16	5/16-24	90 PSI MAX	1/4"	7	15
T-7553	11,000	3	2.5	3/32	5/16-24	90 PSI MAX	1/4"	8	16
T-7555 & T-7556	10,000	5 & 6	2	3/16	5/16-24	90 PSI MAX	1/4"	8	16
T-7555B & T-7556B	10,000	5 & 6	2	3/32	5/16-24	90 PSI MAX	1/4"	8	16
T-7555VAC & T-7556VAC	11,000	5 & 6	2.5	3/16	5/16-24	90 PSI MAX	1/4"	8	16

T-7446

6" DA Sander 3/16" Orbit



The T-7445/T-7446 have a smaller grip to better fit smaller hands. They both come with regulators and muffled exhaust.

T-7445

5" DA Sander 3/16" Orbit



Great finishing sanders. Smooth and quiet, yet have a fast cutting action.

T-7553

3" Mini Palm Grip DA Sander 3/32" Orbit



The T-7553 is small, compact and easy to use. It features heavy-duty ball bearing construction, built-in regulator and a smooth powerful cutting action. The 3" velcro pad makes for easy attachment of sanding disks. The 3/32" Orbit gives a fine finish for the most demanding work.

T-7445/46 SL

DA Sander w/ safety lever



T-7555B

5" DA Sander 3/32" Orbit

T-7556

6" DA Sander 3/16" orbit

PRODUCTION SANDERS



T-7555

5" DA Sander 3/16" orbit



T-7556B

6" DA Sander 3/32" Orbit



The T-7556/T-7555 are built for comfort and deliver a fine finish. Features adjustable exhaust, heavy duty ball bearing construction, paddle lever, built-in regulator and rear exhaust. (Specify PSA or Velcro pads)

The T-7555B/T-7556B have the same great specs as the T-7555/T-7556, but have a 3/32" orbit that can give a finer finish.

T-7555VAC

5" Palm Grip DA Sander Vacuum Ready 3/16" Orbit




T-7556VAC

6" Palm Grip DA Sander Vacuum Ready 3/16" Orbit



The T-7556VAC/T-7555VAC have the same great specs as the T-7556/T-7555, but are set up to be attached to an industrial vacuum cleaner.

Bag and hose come with the T-6955VAC and T-6956VAC tools seen on left

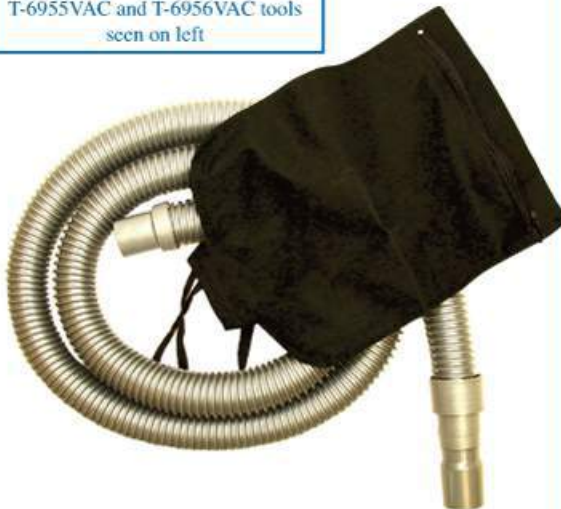

T-7665

Detail Triangular Mini Jitterbug Sander



The T-7665 is small, compact and easy to use. It features heavy-duty ball bearing construction, built-in regulator and a smooth powerful cutting action. The vinyl face pad makes for easy attachment of PSA sandpaper. Pad size is 90 x 90 x 80mm. Triangular Pad allows use in corners and tight spots. The 1/8" Orbit gives a fine finish and heavy cutting action for the most demanding work. Can be used for sanding, polishing and scrubbing. *Velcro pads available.*

T-7211

2" Angle DA Sander



- *Regulator
- *Full ball bearing construction
- *Built-in silencer
- *1/8" Orbit

Our best 2" DA Sander for getting in hard to reach spots where finish work is needed.

T-7311

6" DA Sander



- T-7311/T-7311W5
- *Built-in Regulator
 - *1/2 HP motor
 - *Full ball bearing construction
 - *Built-in silencer
 - *Balanced counter weight design
 - *Locking shaft for easy pad removal
 - *Available with Velcro pad (specify when ordering)
 - *3/8" Orbit

T-7311W5

5" DA Sander

T-7311SL

WITH SAFETY LEVER

(SPECIFY 5" OR 6" PAD)



Spare pads for the T-7211 & T-7511

T-7511

2" Angle DA Sander



A great finishing sander. Smooth and quiet, yet has a fast cutting action.

- *Rear Exhaust
- *Full ball bearing construction
- *Designed for small finishing jobs

721128

2" PSA DA Pad 1/4-20



721128V

2" Velcro DA Pad 1/4-20



751138

2" PSA DA Pad 6mm



751138V

2" Velcro DA Pad 6mm



T-7786

6" DA Sander
w/ 9/32" Orbit



T-7785

5" DA Sander
w/ 9/32" Orbit



- *Built-in regulators
- *Built-in silencer
- *Smooth performance
- *Fast cutting dual action
- *Our best DA Sander in this style
- *9/32" Orbit

Smooth, quiet and reliable, the T-7786 & T-7785 have a fast cutting action with the least amount of vibration possible. Exhaust is through the handle and blows toward the air hose, not on your work.

What does Taylor do for you? We have the product in stock, we have the parts in stock. We service what we sell and we do it at reasonable prices and timely. We are available to discuss where and how you will use your tools and help you to buy the best tool for your application.

T-9556

6" Super Duty
DA Sander
3/16" Orbit

The T-9555 & T-9556 sanders are our smoothest running DA Sanders. Metal rotors and fiberglass pads help to improve cutting action and durability.

T-9556B

6" Super Duty
DA Sander
3/32" Orbit



OUR SMOOTHEST DA SANDERS



T-9555B

5" Super Duty
DA Sander
3/32" Orbit

- *Heavy duty ball bearing construction.
- *Special offset head bearing.
- *Paddle Lever
- *Light and Powerful
- *Smooth cutting action
- *Built-in regulator
- *Rear exhaust



T-9555

5" Super Duty
DA Sander
3/16" Orbit



MODELS	FREE SPEED rpm	PAD SIZE inch	WEIGHT lbs.	ORBIT DIA. inch	SPINDLE SIZE	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-7211	8,000	2"	1.5	1/8	1/4-20	90 PSI MAX	1/4"	6	25
T-7311 & T-7311W5	10,000	5" or 6"	4.25	3/8	5/16-24	90 PSI MAX	1/4"	8	18
T-7511	18,000	2"	1.25	9/64	6mm	90 PSI MAX	1/4"	5	16
T-7665	10,000	90x90x80mm	1.65	1/8	n/a	90 PSI MAX	1/4"	9	18
T-7785 & T-7786	10,000	5" or 6"	3.25	9/32	5/16-24	90 PSI MAX	1/4"	7	20
T-9555 & T-9556	10,000	5" or 6"	2.2	3/16	5/16-24	90 PSI MAX	1/4"	7	15
T-9555B & T-9556B	10,000	5" or 6"	2.2	3/32	5/16-24	90 PSI MAX	1/4"	7	15

SANDERS

Taylor

- *Positive lock clips hold paper in place
- *Rubber grip absorbs shock
- *One hand operation
- *1/8" orbit for fine work

Used for wet or dry sanding. Great for fiberglass, plastic, steel, aluminum, or wood. A must for every body shop and woodworking shop.



T-7765

Jitterbug Sander 3-2/3" X 9"

T-7888P

3" Mini Polisher/Sander



2,500 RPM

- *Includes 3" Foam back Velcro pad.
- *Rear Exhaust
- *For use on steel, aluminum, wood, plastic, rubber etc.
- *Rubber comfort grip
- *Ideal for sanding and polishing

T-8865

Jitterbug Sander 3.75" X 4.25"
With PSA PAD

T-8865V

Jitterbug Sander 3.75" X 4.25"
With VELCRO PAD



- *Positive lock clips paper in place
- *Rubber grip absorbs shock
- *1/8" Orbit for fine work

Used for wet or dry sanding. Great for fiberglass, plastic, steel, aluminum or wood. A must for every body shop and woodworking shop.

Tay.7888P50V
3" Velcro Pad
5/16-24



T-8859RS50
Pad Adapter
1/4-20 X 5/16-24



T-8859RS51
3" Rolok Pad
5/16-24 Female



T-8859RS

15,000 RPM Angle Sander
w/3" rollok pad



A new addition based on the T-8859R. Rollok pad makes easy and convenient abrasive changes.

T-8859HRS

4,000 RPM Angle Sander
w/3" rollok pad



A new addition based on the T-8859R motor. Added gear train and new angle head gives you twice the torque and Rollok pad makes easy and convenient abrasive changes.



T-6778

5" High Speed Sander



T-5550

**5" Sander
11,000 RPM**



The T-5550, T-6778 & T-7778 are ideal tools for flat or contour surfaces. Great for feather edging, touch up and production sanding. Motor design gives smooth balanced performance. Built-in regulator adds precise speed control.

The .7 HP motor makes quick work of removing fiberglass, wood, steel or aluminum. Unique governor allows more air when RPM's drop.

- *Auxilliary handle fits right and left side
- *All ball bearing construction
- *Lightweight aluminum housing
- *Exhaust muffler through handle
- *Gearless - direct drive.
- *Governor controlled. Maintains RPM under load.

5" Sander Backup pads

3"-777826, 4-1/2"-777827,
5"-777828



T-7778

5" High Speed Sander



T-8759RS

2" Orbital Spot Repair Sander

The T-8759RS is our smallest orbital sander. Great for spot repair and corner work. Comes with 1", 2" and triangle pads w/velcro.



- * Heavy duty ball bearing construction
- * Light and Powerful
- * Built-in regulator
- * Comes with holding rod to facilitate pad or paper change.
- * Comes with three backup pads


MODELS	RPM	PAD SIZE inch	SPINDLE SIZE	HEIGHT in.	WEIGHT lbs.	AVERAGE AIR CONS.	AIR CONS. @ LOAD	AIR PRESSURE	AIR INLET NPT
T-5550	11,000	5	5/8-11	6.1	2.34	15	32	90 PSI MAX	1/4"
T-6778	18,000	3, 4.5, 5	7/16-20	2	2.3	12	25	90 PSI MAX	1/4"
T-7765	8,000	3.6 x 9	N/A	6.5	4.75	9	12	90 PSI MAX	1/4"
T-7778	14,000	3, 4.5, 5	7/16-20	2	2.3	12	25	90 PSI MAX	1/4"
T-7888P	2,500	3 ROLOK	5/16-24	5.5	1.32	4	14	90 PSI MAX	1/4"
T-8759RS	15,000	2	1/4 - 20	2.75	1.2	4	19	90 PSI MAX	1/4"
T-8859RS	15,000	3 ROLOK	5/16-24	7	1.7	5	24	90 PSI MAX	1/4"
T-8865V & T-8865	10,000	3.25 x 4.75	N/A	5	1.5	9	18	90 PSI MAX	1/4"
T-8859HRS	4,000	3 ROLOK	5/16-24	2	2.2	5	24	90 PSI MAX	1/4"

T-7265

Finger Sander



This unique sander replicates the human finger in its orbital motion. Tool includes 4 "finger" pads.

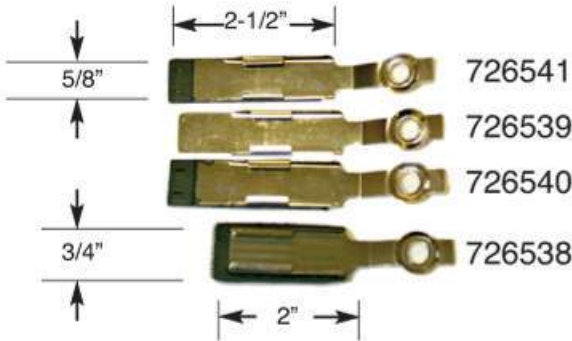

T-7315

Straight Line Sander



The T-7315 removes material from large areas with ease. The synchronized dual pistons give a smooth action that reduces operator fatigue.

- * Proven twin piston design
- * Quick action sandpaper clamps
- * Exceptionally quiet
- * Long life cylinder liners and racks
- * Lightweight and easy to use.

Replacement pad assembly part # 731529



T-7815A

5" Angle Sander




The T-7815A features heavy duty alloy steel gears, safety lock off lever, lightweight aluminum housing, built-in regulator and convenient side handle. Rear exhaust.

Fast material removal is accomplished with a gear driven 50 square inch pad. Ideal for applications between grinding and finish sanding. Eliminates scratch patterns.

T-7777

8" Orbital Sander

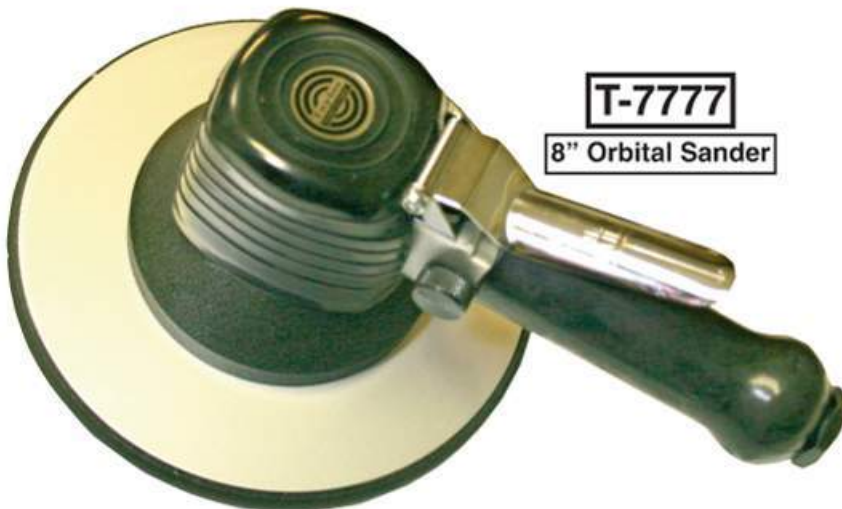

- * Built-in regulator
- * All ball bearing construction
- * Insulated handle
- * .5 HP motor provides plenty of power



777703
Replacement 8" pad for T-7777



Tay.7815A02
Replacement 5" pad for T-7815A



Tay.7715N67V
5" Velcro pad for T-7815A and tools under 15,000 RPM

MODELS	RPM	PAD SIZE	SPINDLE SIZE	LENGTH in.	WEIGHT lbs.	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-7265	16,000	various	N/A	7	1.5	90 PSI MAX	1/4"	5	16
T-7315	3,000 SPM	2.75" x 17.5"	N/A	17.5	6.25	90 PSI MAX	1/4"	8	11
T-7777	900	8"	N/A	11.5	4.25	90 PSI MAX	1/4"	8	18
T-7815A	6000	5"	5/8 - 11	9.7	2.9	90 PSI MAX	1/4"	10	21



T-7716

7" Angle Sander

This lightweight, rugged 1.0 horsepower sander is excellent for shaping and contouring patches, sanding body filler and for heavy rust removal. Comes complete with a rubber backup pad - (our T-7470A).

- * All ball bearing construction
- * Side handle for right or left handed operation
- * Built-in regulator
- * Hardened and ground spiral bevel gears
- * 1 HP motor



T-7716P

7" Angle Polisher

The T-7716P Same great tool as the T-7716 but with a lower gear ratio. RPM is 2500, the perfect polishing speed. Comes complete with a rubber backup pad (our T-7470A) and the T-7472 Wool Polishing Pad.



T-8816

7" Angle Sander

The T-8816 is excellent for shaping and contouring patches, sanding body filler and for heavy rust removal. Comes complete with a foam 7" Velcro Pad - (T-881647V). Sanders come with blue grip and run at 5500 RPM. Polishers have a red grip and are 2500 RPM. The T-8816 & T-8816P have all the bells and whistles - Rear exhaust - lock off levers - cushion grips - foam pads - low noise - grease fitting in head.



T-8816P

7" Angle Polisher

Tay.7715N67V

5" Cushioned Velcro Pad 5/8-11



Tay.7815A02

5" Plastic Pad 5/8-11



MODELS	RPM	PAD SIZE in.	SPINDLE SIZE	WEIGHT lbs.	LENGTH in.	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-7716	5,500	7	5/8 -11	4.625	16	90 PSI MAX	1/4"	13	26
T-7716P	2,500	7	5/8 -11	4.625	16	90 PSI MAX	1/4"	13	26
T-7718	4,000	7	5/8 -11	5.25	8.25	90 PSI MAX	1/4"	11	22
T-7718P	2,000	7	5/8 -11	5.25	8.25	90 PSI MAX	1/4"	11	22
T-8816	5,500	7	5/8 -11	4.625	16	90 PSI MAX	1/4"	10	21
T-8816P	2,500	7	5/8 -11	4.625	16	90 PSI MAX	1/4"	10	21
T-9916	4,500	7	5/8 -11	4.625	16	90 PSI MAX	1/4"	10	21
T-9916P	2,500	7	5/8 -11	4.625	16	90 PSI MAX	1/4"	10	21

T-9916

7" Angle Sander



Both tools have a push button to lock the spindle for easy pad removal. (on left)



This lightweight, rugged 1.3 horsepower sander is excellent for shaping and contouring patches, sanding body filler and for heavy rust removal. Comes complete with a plastic backup pad. Auxiliary plastic handle rotates for left or right handed use, or straight up!

T-9916P

7" Angle Polisher

Same great tool as the T-9916 but with a lower gear ratio. RPM is 2500, the perfect polishing speed. Comes complete with a plastic backup pad.



T-7718

7" Vertical Sander



Both the T-7718 & 18P are available with a short muffer side handle. Add SM after the model #.



- * Built-in regulator
- * Ball bearing construction
- * Lightweight aluminum housing
- * Exhausts through handle
- * Rugged 1 HP motor

T-7718P

7" Vertical Polisher

Same great tool as the T-7718 but with a lower gear ratio. RPM is 2000, the perfect polishing speed. Comes complete with a rubber backup pad, our T-7470A and the T-7472 Wool Polishing Pad. A great tool for buffing and polishing paint, plastic, metal and wood.



T-7470A

7" Rubber Pad



T-7472

7 1/2" Wool Polishing Pad



T-881647

7" PSA Pad




T-881647V

7" Velcro Poly Pad



T-7716DS

4500 RPM Drum Sander

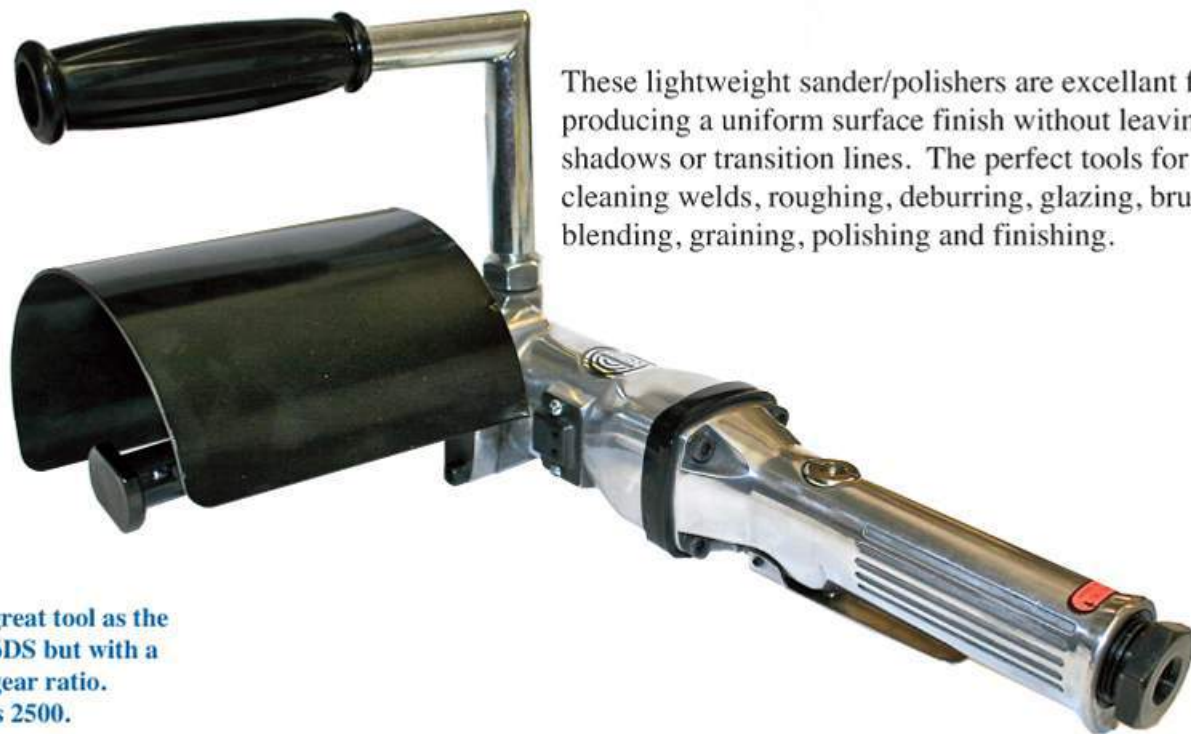

These lightweight sander/polishers are excellent for producing a uniform surface finish without leaving shadows or transition lines. The perfect tools for cleaning welds, roughing, deburring, glazing, brushing, blending, graining, polishing and finishing.

Same great tool as the T-7716DS but with a lower gear ratio. RPM is 2500.



- * All ball bearing construction
- * Side handle for right or left handed operation
- * Built-in regulator
- * Hardened and ground spiral bevel gears
- * 1 HP motor

T-7716DP

2500 RPM Drum Polisher

WHEN OPERATING PNEUMATIC TOOLS IT IS OF THE UTMOST IMPORTANCE TO THINK SAFETY FIRST. DISCONNECT TOOLS FROM THE AIR SUPPLY WHEN CHANGING ACCESSORIES OR WHEN THE TOOL IS NOT IN USE. DIRECT EXHAUST AWAY FROM YOURSELF AND OTHERS. USE EYE PROTECTION. USE HEARING PROTECTION WHEN TOOLS ARE BEING USED FOR EXTENDED PERIODS. USE 90 PSI MAX AT THE TOOL. PUTTING A FEW DROPS OF AIR TOOL OIL IN THE TOOL AND RUNNING FOR A FEW SECONDS AT THE END OF A DAY WILL HELP PROTECT INTERNAL PARTS. FOLLOW ALL OPERATING INSTRUCTIONS AND OPERATE TOOL IN ACCORDANCE WITH THE ANSI B186.1 SAFE OPERATING CODE.



T-8818P
7" Vertical Polisher
2500 RPM

- *All ball bearing construction
- *Side handle for right or left handed operation
- *Exhaust through handle muffler
- *Hardened and ground spiral bevel gears
- *1 HP motor

RPM is 2500, the perfect polishing speed. Comes complete with a plastic backup pad, pad nut and wrench. A great tool for buffing and polishing paint, plastic, metal and wood. Can be used with brushes to clean automotive carpets.

Spindle thread is 3/8-24. Tool comes with adapter Tay.8818P11. Adapter has male thread 5/8-11. Also has female threads 5/16-24 and 3/8-24.

Tay.8818P11
Adapter



Tay.7715N67V
5" Cushioned Velcro Pad 5/8-11



T-881645V
5" Velcro Poly Pad 5/8-11



Tay.7815A02
5" Plastic Pad 5/8-11



T-7470A
7" Rubber Pad



T-7472
7 1/2" Wool Polishing Pad



T-881647
7" PSA Pad



T-881647V
7" Velcro Poly Pad



MODELS	RPM	PAD SIZE inch	SPINDLE SIZE	LENGTH in.	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-7716DP	2,500	4x4	1" keyed	16	90 PSI MAX	1/4"	13	26
T-7716DS	4,500	4x4	1" keyed	16	90 PSI MAX	1/4"	13	26
T-8818P	2,500	7	3/8-24	5.5	90 PSI MAX	1/4"	10	21

BELT SANDERS

Taylor



T-7060

1/4" X 13" Belt Sander

RPM 16,000
 Belt Size 1/4" X 13"
 HP .37
 Length 15-1/2"
 Weight 1.7 lbs.
 Air Pressure 90 PSI Max.
 AVG.CFM 4
 Lightweight Belt Sander is built for heavy use. Exhaust muffler keeps dBA's in the low 80's.

*Rear Exhaust
 *For use on steel, aluminum, wood, plastic, rubber, etc.
 *Adjustable Head
 *Includes 2 belts
 *Works well in corners and on irregular shapes



T-7010

3/8" X 13" Belt Sander

RPM 16,000
 Belt Size 3/8" X 13"
 HP .37
 Length 16-1/2"
 Weight 1.7 lbs.
 Air Pressure 90 PSI Max.
 AVG.CFM 4
 Lightweight Belt Sander is built for heavy use. Exhaust muffler keeps dBA's in the low 80's.

*Rear Exhaust
 *For use on steel, aluminum, wood, plastic, rubber, etc.
 *Adjustable Head
 *Includes 2 belts
 *Works well in corners and on irregular shapes



T-7012

1/2" x 24" Belt Sander

RPM 16,000
 Belt Size 1/2" X 24"
 HP .37
 Length 21-1/2"
 Weight 2 lbs.
 Air Pressure 90 PSI Max.
 AVG.CFM 4
 Lightweight Belt Sander is built for heavy duty use. Exhaust muffler keeps dBA's in the low 80's. Long reach makes tough jobs accessible.

*Rear Exhaust
 *For use on steel, aluminum, wood, plastic, rubber, etc.
 *Adjustable Head
 *Includes 2 belts
 *Works well in corners and on irregular shapes



T-7020

3/4" X 20 1/2" Belt Sander

RPM 16,000
 Belt Size 3/4" X 20-1/2"
 HP .45
 Length 18-1/2"
 Weight 3.1 lbs.
 Air Pressure 90 PSI Max.
 AVG.CFM 7
 Lightweight Belt Sander is built for heavy duty use. Exhaust muffler keeps dBA's in the low 80's. Long reach makes tough jobs accessible.

*Rear Exhaust
 *For use on steel, aluminum, wood, plastic, rubber, etc.
 *Adjustable Head
 *Includes 2 belts
 *Works well in corners and on irregular shapes



T-7030

1 3/16" X 21 1/4" Belt Sander

RPM 12,000
 Belt Size 1-3/16" X 21-1/4"
 HP .7
 Length 19-1/2"
 Weight 4.9 lbs.
 Air Pressure 90 PSI Max
 AVG.CFM 10
 Lightweight Belt Sander is built for heavy use. Exhaust muffler keeps dBA's in the low 80's. Works well in corners and on irregular shapes.

*Rear Exhaust
 *For use on steel, aluminum, wood, plastic, rubber, etc.
 *Adjustable Head
 *Includes 2 belts
 *Handle for safety and leverage.

All 5 models have a rubber detachable muffler that can be rotated to direct exhaust away from user & work.

T-6020A

3/4" X 20 1/2"
Economy
Belt Sander



RPM 16,000
Belt Size 3/4" X 20-1/2"
HP .45
Length 14"
Weight 3.1 lbs.
Air Pressure 90 PSI Max.
AVG.CFM 5

Lightweight Belt Sander is built for heavy use.

- * Rear Exhaust
- * For use on steel, aluminum, wood, plastic, rubber, etc.
- * Adjustable Head
- * Includes 2 belts
- * Works well in corners and on irregular shapes

T-7010AN

3/8" X 13"
Belt Sander



RPM 16,000
Belt Size 3/8" X 13"
HP .37
Length 11"
Weight 1.7 lbs.
Air Pressure 90 PSI Max.
AVG.CFM 5

Rugged and dependable

- * Rear Exhaust
- * For use on steel, aluminum, wood, plastic, rubber, etc.
- * Adjustable Head
- * Includes 2 belts
- * Works well in corners and on irregular shapes

T-7012A

1/2" X 24"
Belt Sander



RPM 16,000
Belt Size 1/2" X 24"
Length 17"
HP .37
Air Inlet 1/4" NPT
Air Pressure 90 PSI Max.
Weight 2 lbs.
AVG. CFM 5

Lightweight Belt Sander is built for heavy duty use.

- * Rear Exhaust
- * For use on steel, aluminum, wood, plastic, rubber, etc.
- * Adjustable Head
- * Includes 2 belts
- * Works well in corners and on irregular shapes

T-7020A

3/4" X 20 1/2"
Belt Sander



RPM 16,000
Belt Size 3/4" X 20-1/2"
HP .45
Length 14"
Weight 3.1 lbs.
Air Pressure 90 PSI Max.
AVG. CFM 8


Lightweight Belt Sander is built for heavy use.

- * Rear Exhaust
- * For use on steel, aluminum, wood, plastic, rubber, etc.
- * Adjustable Head
- * Includes 2 belts
- * Works well in corners and on irregular shapes

We have belts available for all of our belt sanders in grits of 60, 80, 100 and 120. Belts for the T-6020A, T-7020, T-7020A & T-8020G also available in 24 & 36 grit.

The 7 series belt sanders on the left are the "Cadillacs" of Belt Sanders.

The ones above are the "Chevy's", great tools, but without the bells and whistles.

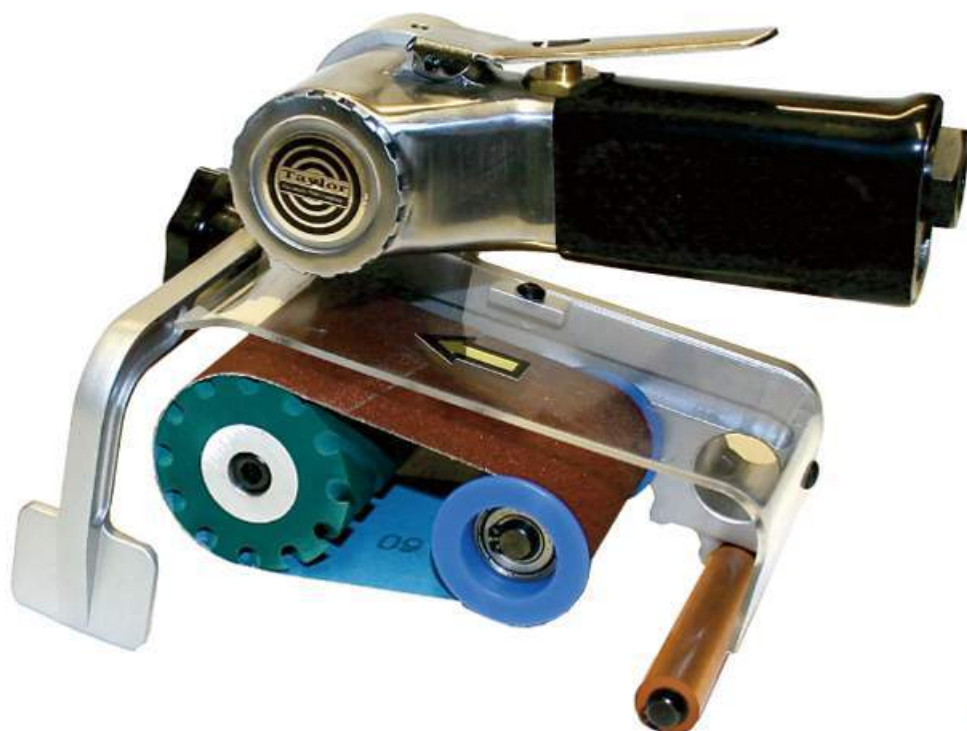

T-7040A

60 X 260 mm
(2.36" x 10.23")
Economy Belt Sander

RPM	7,000
Belt Size	2.36" x 10.23"
HP	.37
Length	7"
Weight	3 lbs.
Air Pressure	90 PSI Max
Air Inlet	1/4" NPT

This unique sander has many uses. The roller on the right of the tool acts as a pivot point so that more or less pressure can be exerted. Side guide can be used for straight passes. Boss on right of tool for vacuum hookup. Includes one 60 grit belt.

Belts for T-7040A available in 36, 60, 80, 100, and 120 grit.


T-7050C

2" Shredder
w/Coarse Carbide
Coated Wheel

RPM	7,000
Wheel Size	2" x 2-1/4"
HP	.37
Length	7"
Weight	3 lbs.
Air Pressure	90 PSI Max

Wheels available in 16 and 24 Grit as T-7050C16 and T-7050C24.

This unique shredder has many uses. The roller on the back of the tool acts as a pivot point so that more or less pressure can be applied. Carbide wheel cuts fiberglass, concrete, wood, plastic and many other materials.

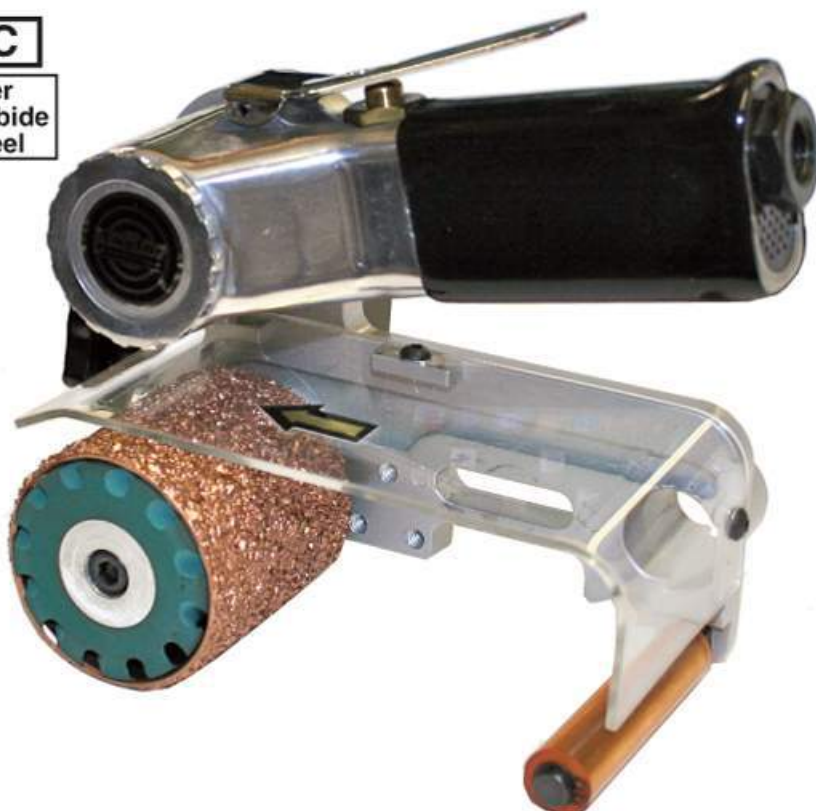

T-8020G

3/4" X 20-1/2" Belt Sander
For use with thicker
surface prep belts.



Convenient side door allows easy access for changing belts. Can use standard abrasive belts as well as thick surface prep belts.

RPM	16,000
Belt Size	3/4" X 20-1/2"
HP	.45
Length	18-1/2"
Weight	2.76 lbs.
Air Pressure	90 PSI Max

This Lightweight Belt Sander is built for heavy use. Exhaust muffler keeps dBAs in the low 80's.

- *Includes 2 standard belts
- *Works well in corners and on irregular shapes
- *Rear Exhaust
- *For use on steel, aluminum, wood, plastic, rubber etc.
- *Adjustable Head
- *Side door - for easy access



BELT SANDER BELTS ARE AVAILABLE IN 60, 80, 100 & 120 GRIT, PLUS 24 & 36 GRIT FOR THE T-6020A, T-7020, T-7020A, T-8020G.

T-7716W

7" WET Angle Sander



- *All ball bearing construction
- *Side handle for right or left operation
- *Built-in regulator
- *Hardened and ground spiral bevel gears
- *Adjustable water feed through the spindle

RPM 4500
 Spindle Size 5/8-11
 Length 16"
 Weight 4-5/8 lbs.
 Air Inlet 1/4" NPT
 Air Pressure 90 PSI Max.

T-9913WS

3" Angle Water Polisher



RPM 4500
 Spindle Size 5/8-11
 Length 9.06"
 Weight 4 lbs.
 Air Inlet 1/4"
 Air Pressure 90 PSI Max.

The T-9913WS is a top of the line Air Polisher for Stone Fabricators. Designed for continuous production use with maximum performance in Stone Shops. A very durable tool when used in adverse conditions, just remember to oil the tool through the air inlet and run for a second or two to coat all internal parts after use. Centrally fed water distribution provides quality finishes.

Comes complete with 3" velcro pad, air hose, water feed hose with valve, splash guard, side handle and wrench.

MODELS	RPM	PAD SIZE inch	SPINDLE SIZE	LENGTH in.	WEIGHT lbs.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-7716W	4,500	7	5/8 -11	16	4.625	1	90 PSI MAX	1/4"	13	26
T-9407S	6,500	7	5/8 -11	8.5	7.5	2	90 PSI MAX	1/2"	20	40
T-9913WS	4,500	3	5/8 -11	9.1	4	1	90 PSI MAX	1/4"	14	27

T-9407S

7" Vertical Sander

2 HP



The T-9407S is a 2 HP sander that comes complete with a T-7470A 7" rubber pad and pad nut. This is the same great tool as the T-9407 grinder, but without a guard. T-9407S has a governor to prevent over speeding as well as a heavy duty lock off lever to help prevent accidental starts.

T-881647V

**7" Velcro Pad
5/8-11**



T-7470A

**7" Rubber Pad
5/8-11**



**SEE PAGE 34 FOR
MORE PADS**

T-7415

5" DA Pad - 5/16-24 for the T-7311W5, T-7445 and T-7785. PSA - Has vinyl face for pressure sensitive adhesive abrasives.



T-7415V

5" DA Pad - 5/16-24 for the T-7311W5, T-7445 and T-7785. Has velcro face for abrasives with the hook and loop system.



Tay.755545

5" DA Pad - 5/16-24 for the T-7555, T-9555, T-7311W5, T-7445 and T-7785. Thin pad for use with PSA abrasives.



T-7415VAC

5" DA Pad for use with T-7555VAC Spindle size 5/16-24 PSA vinyl face.



T-7415VV

5" DA Pad for use with T-7555VAC Spindle size- 5/16-24 Velcro face.



T-7416

6" DA Pad - 5/16-24 for the T-7311, T-7446 and T-7786. PSA - Has vinyl face for pressure sensitive adhesive abrasives.



T-7416V

6" DA Pad 5/16-24 for the T-7311, T-7446 and T-7786. Has velcro face for abrasives with the hook and loop system.



Tay.755546

6" DA Pad - 5/16-24 for the T-7556, T-9556, T-7311, T-7446 and T-7786. Thin pad for use with PSA abrasives.



T-7416VAC

6" DA Pad for use with T-7556VAC Spindle size- 5/16-24 PSA vinyl face.



T-7416VV

6" DA Pad for use with T-7556VAC Spindle size- 5/16-24 Velcro face.



Tay.755338

3" DA Pad 5/16-24 for the T-7553. PSA Vinyl Face.



Tay.755338V

3" DA Pad 5/16-24 for the T-7553. Velcro Face.



Tay.755344

3-1/2" Polishing Pad for the T-7553. For use with Tay.755338V velcro pad.



Tay.721128

Tay.721128V

2" DA Pads for the T-7211 PSA or Velcro 1/4-20.



Tay.751138

Tay.751138V

2" DA Pads for the T-7511 PSA or Velcro 6mm thread.



T-881647 & T-881647V

(PSA) (VELCRO)
7" Poly Pads for the T-7716, T-7718, T-8816/P type tools. 5/8-11 Female thread 5500 RPM Max.



T-7470A

7" Rubber Back Up Pad for the T-7716, T-7718, T-8816/P type tools. 5/8-11 Female thread 6600 RPM Max. Also available T-7471B Medium Flex rated 8600 RPM.



T-7472

7 1/2" Wool Polishing Pad for the T-7716P and T-7718P.



T-6415 5" PSA



T-6416 6" PSA



T-6415V 5" Velcro



T-6416V 6" Velcro



T-881645V 5" Foam Velcro Pad 5/8-11



Tay. 7715N67V 5" Cushioned Velcro Pad 5/8-11



Tay.7815A02 5" Plastic Pad 5/8-11



77703 8" PSA Pad w/5 Holes



T-6415VV Velcro Vacuum



T-6416VV Velcro Vacuum



T-5710
Brass Multi-Position
Regulator 1/4" NPT



T-5711
Brass Regulator
1/4" NPT



T-5712
Brass Regulator
w/Gauge 1/4" NPT



T-6922
Hose Swivel
1/4" NPT



T-6922R
Regulated Hose Swivel
1/4" NPT



T-7922
Hose Swivel
1/4" NPT



T-7922R
Regulated Hose Swivel
1/4" NPT



T-7923
Hose Swivel
3/8" NPT



T-7924
Hose Swivel
1/2" NPT



T-5830
Mini Oiler
1/4" NPT



T-#23450 Hose Swivel-7/8-24
Fits our T-#2,3,4 Chipping Hammers.
Remove air inlet - screw into handle.



T-#23451 Hose Swivel-3/8" NPT
Fits all tools with 3/8" NPT.
Screws into air inlet.



GRINDERS

Taylor

T-7707

7" Angle Grinder

**1.25 HP
MOTOR**

- *Precision bearings
- *Removable side handle
- *Hardened spiral bevel gears
- *Uses type 27 grinding wheel (not included)



The T-7707 is a heavy duty grinder designed for production grinding in foundries, shipyards, fabrication shops and any application that requires a powerful lightweight grinder. Built-in governor to prevent overspeed.

T-7715N

5" Angle Grinder
5/8-11



**.7 HP
MOTOR**

T-7715

5" Angle Grinder
3/8-24



- *.7 HP motor provides fast efficient grinding in tight spots
- *Hardened spiral bevel gears in angle head for long life and low vibration
- *Lock off lever standard
- *Uses type 27 grinding wheels (not included)
- *Built-in governor prevents overspeed

T-7714

4" Angle Grinder
3/8-24



MODELS	RPM	WHEEL SIZE inch	SPINDLE SIZE	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-7707	7,500	7	5/8-11	8.375	13.5	1.25	90 PSI MAX	1/4"	12	24
T-7714	12,000	4	3/8-24	4	8.75	.7	90 PSI MAX	1/4"	12	24
T-7715	12,000	5	3/8-24	4	8.75	.7	90 PSI MAX	1/4"	12	24
T-7715N	12,000	5	5/8-11	4	8.75	.7	90 PSI MAX	1/4"	12	24
T-8815	10,000	5	5/8-11	3.19	8.25	.6	90 PSI MAX	1/4"	10	21
T-8859G	15,000	2	5/16-24	1.5	7	.45	90 PSI MAX	1/4"	5	23
T-9914 & 15	11,000	4 & 5	3/8-24	3.2	9.5	1.3	90 PSI MAX	1/4"	15	36
T-9915N	11,000	5	5/8-11	3.2	9.5	1.3	90 PSI MAX	1/4"	15	36
T-9915ND & NG	11,000	5	5/8-11	3.2	9.5	1.3	90 PSI MAX	1/4"	15	36
T-9969G	9,000	4	5/8-11	2.4	.9	.9	90 PSI MAX	1/4"	15	36

T-8815

5" Angle Grinder
5/8-11 Spindle



Lightweight yet durable, the T-8815 has a comfortable grip, safety lever and adjustable exhaust. This tool is powerful and has a side handle for extra control. Uses type 27 grinding wheels (not included).

T-9969G

4" Angle Grinder
w/ 5/8-11 Spindle

**.9 HP
MOTOR**



Powerful, lightweight and easy to use, the T-9969G grinder makes quick work of grinding steel, aluminum, composites and wood. Built-in regulator for precise speed control. Hardened cylinder and end plates. Rear exhaust. 105° angle head. Uses type 27 wheel (included).

T-8859G

.45HP 2" Angle Grinder

The T-8859G is small enough to reach the tightest areas. Rear exhaust and quiet operation. Complete with 2" type 27 wheel, swivel guard, grease fitting and built in regulator.



T-9914, T-9915, T-9915N, T-9915ND, T-9915NG

- * PUSH BUTTON SPINDLE LOCK FOR EASE OF WHEEL REMOVAL
- * HARDENED SPIRAL BEVEL GEARS
- * ADJUSTABLE EXHAUST
- * LEFT OR RIGHT HAND AUXILIARY HANDLE
- * BUILT IN GOVERNOR TO PREVENT OVERSPEED



The T-9915 series of grinders are built for production and long life. Adjustable exhaust, Heavy duty safety lockoff lever. Use type 27 wheels (not included).

Designed for production grinding in foundries, shipyards, fabrication shops and any application that requires a powerful lightweight grinder.

**1.3 HP
MOTOR**



**Guard Swivels
Left & Right**



T-9914

4" Guard
3/8-24

T-9915

5" Guard
3/8-24

T-9915N

5" Guard
5/8-11

T-9915ND

5" w/Dust Collector
5/8-11 Spindle

T-9915NG

5" w/ 5/8-11 /w Swivel Guard



T-8600 Heavy Duty 6" Straight Grinder

1.4 HP



T-8600CG Heavy Duty Cone & Plug Grinder

The T-8600 and T-8600CG are designed for maximum durability. Governor prevents overspeed and maintains optimum RPM. Heavy Duty ball bearing construction. Ergonomic design for operator comfort. Safety lock off lever helps prevent accidental starts. High power to weight ratio. (Wheels not included)

2 HP



T-9407
7" Super Duty
Vertical Grinder

GRINDING WHEEL
NOT INCLUDED



T-9409
9" Super Duty
Vertical Grinder

The T-9407 and T-9409 are 2 HP grinders designed for removal of heavy duty rust and scale, for grinding welds and heavy deburring. These grinders are for use with depressed center grinding wheels and accept 7" or 9" diameter type 27 wheels. Equipped with an internal governor to limit speed as well as a heavy duty lock off lever to help prevent accidental starts.

T-9509

9" Super Duty Vertical Grinder



3 HP

The T-9509 is a 3 HP grinder designed for removal of heavy duty rust and scale, for grinding welds and heavy deburring. This grinder is for use with depressed center grinding wheels and accepts 9" diameter type 27 wheels. Equipped with an internal governor to limit speed as well as a heavy duty lock off lever to help prevent accidental starts.

T-9600

9" Super Duty Vertical Grinder



4 HP

- *Lock off lever prevents accidental starts.
- *Built-in governor prevents overspeed.
- *Both handles are replaceable.

T-9600C

6" Super Duty Vertical Cup Grinder



Heavy duty surface grinder designed for continuous sanding and grinding in production situations. Smooths rough surfaces and cuts down high spots. Handles large areas.

Ideal for cleaning castings and masonry work. Great for fabrication shops, steel mills, refineries, shipyards and construction. Removes heavy scale, rust and weld splatter.

MODELS	RPM	WHEEL SIZE	SPINDLE SIZE	HEIGHT in.	WEIGHT lbs.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-8600	6,900	6"	5/8 -11	22.5 length	9.1	1.4	90 PSI MAX	1/2"	20	35
T-8600CG	6,900	N/A	5/8 -11	21 length	8	1.4	90 PSI MAX	1/2"	20	35
T-9407	6,500	7"	5/8 -11	8.5	8.5	2	90 PSI MAX	1/2"	20	55
T-9409	6,500	9"	5/8 -11	8.5	8.75	2	90 PSI MAX	1/2"	20	55
T-9509	6,000	9"	5/8 -11	7.75	12.2	3	90 PSI MAX	1/2"	30	65
T-9600	5,900	9"	5/8 -11	10.75	15	4	90 PSI MAX	1/2"	25	85
T-9600C	5,900	6" cup	5/8 -11	11	15.5	4	90 PSI MAX	1/2"	25	85

7" & 9" GRINDERS

Taylor

1.9 HP



T-9707

7" Heavy Duty Angle Grinder

The T-9707 & T-9709 are super duty grinders designed for production grinding in foundries, shipyards, fabrication shops and any application that requires a powerful, lightweight grinder.

2.5 HP



T-9709

9" Heavy Duty Angle Grinder

- * 1.9 HP & 2.5 HP motors provide fast efficient grinding in tight spots
- * Hardened spiral bevel gear in angle head for long life and low vibration
- * Lock off lever standard
- * Uses type 27 grinding wheels (not included)
- * Built in governor prevents overspeed

2 HP

T-8707
7" Heavy Duty Angle Grinder

The T-8707 has a push button safety lock off lever, variable direction exhaust, built-in governor to maintain constant speed and a quiet and powerful 2 HP motor.



MODELS	RPM	WHEEL SIZE	SPINDLE SIZE	LENGTH in.	WEIGHT lbs.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-8707	8,500	7"	5/8-11	12	6.6	2	90 PSI MAX	3/8"	20	35
T-9707	7,700	7"	5/8-11	11.25	7	1.9	90 PSI MAX	3/8"	33	40
T-9709	5,900	9"	5/8-11	14	9.7	2.5	90 PSI MAX	3/8"	21	30
T-9940	13,500	4"	3/8-24	9.5	3.47	1	90 PSI MAX	1/4"	16	26
T-9940EX & EXH	13,500	4"	3/8-24	10.5	3.85	1	90 PSI MAX	1/4"	16	26
T-9995N	13,000	5"	5/8-11	11.25	5	1	90 PSI MAX	3/8"	15	30

Used for grinding, blending, deburring, cleaning and smoothing with 3" and 4" type 27 wheels in fab shops, refineries, power plants, shipyards, foundaries and a wide variety of manufacturing industries as well as maintenance and repair operations.

T-9940, T-9940EX & T-9940EXH

- *13,500 rpm free speed
- *Short or extended Angle Head
- *Motor parts are hardened and resist wear from contamination
- *Lock off lever standard
- *Uses type 27 grinding wheels (not included)
- *Steel housing withstands rugged use
- *Exhaust deflector rotates to direct air away from the operator and work area
- *Adjustable wheel guard

1 HP

T-9940

4" Angle Grinder



1 HP

T-9940EX

4" Extended Angle Grinder



1 HP

T-9940EXH

4" Extended Angle Grinder w/ Handle



1 HP

T-9995N

5" Angle Grinder



The T-9995N features a muffled rear exhaust, side handle for use on left or right sides, all steel body with aluminum angle head, 13,000 RPM. This smooth running tool has a powerful 1 HP motor with a swivel guard.

3" & 4" CUTOFF TOOLS **Taylor**



T-7801

.5 HP 3" Cutoff Tool

When plenty of reliable power is needed, the T-7801 will provide it. Cuts sheet metal, fiberglass, muffler clamps and hangers. Grinds burrs and rough edges.



T-9801

.9 HP 4" Cutoff Tool

Our strongest and most powerful Cutoff tool. Cuts steel, aluminum, fiberglass and plastic. Excellent for grinding burrs and rough edges.

T-9801341

**Cutoff Wheel
4" x 1/16" x 3/8"**



T-980134

Pack of 50



T-7801341

**Cutoff Wheel
3" x 1/16" x 3/8"**



T-780134

Pack of 50



T-8801R

4" Reversible Angle Cutoff Tool
(uses our T-9801341 4" Cutoff Wheel)
same great tool as the T-8801REX,
but with short reach

	T-8801R	T-8801REX	T-8814EX
RPM	15,000	15,000	11,000
Length	9.2"	14.8"	13.6"
Weight	2.4 lbs.	3.2 lbs.	2.7 lbs.
Air Pressure	90 PSI	90 PSI	90 PSI
Air Inlet	1/4" NPT	1/4" NPT	1/4" NPT
Spindle Size	3/8-24	3/8-24	3/8-24
HP	.9	.9	.45
Avg. CFM	14	14	6

The T-8801REX is a Heavy Duty 4" Cutoff tool designed with extra reach and the special feature of being able to reverse the tool and change the direction of the stream of sparks when cutting. Helps to minimize contamination.

The T-8814EX is a Heavy Duty grinder designed for production grinding in foundries, shipyards, fabrication shops and any application that requires a powerful lightweight grinder.



OPTIONAL SIDE HANDLE
8801REX85 fits T-8801REX
and T-8814EX. Gives added
stability to both tools.



T-8801REX

4" Reversible Extended
Angle Cutoff Tool
(uses our T-9801341
4" Cutoff Wheel)



T-8814EX

4" Extended Angle Grinder
(uses 4" depressed center
grinding wheels)



T-9988HD

1/2" Hammer Drill

The T-9988HD is small, compact, lightweight and strong. This tool easily drills 1/2" holes in concrete. Comes with cushioned grip, side handle and 1/2" drill chuck.

MODELS	RPM	WHEEL SIZE	ARBOR SIZE	LENGTH in.	WEIGHT lbs.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-7801	25,000	3"	3/8"	7.75"	1.785	.5	90 PSI MAX	1/4"	6	26
T-9801	18,000	4"	3/8"	7"	2.1	.9	90 PSI MAX	1/4"	9	30
Hammer Drill		CHUCK SIZE								
T-9988HD	1,800	1/2"	3/8-24	10.5	4.25	.5	90 PSI MAX	1/4"	6	20

3/8" & 1/2" DRILLS

Taylor

T-5540SPC

2 Speed Drill
w/ 3/8" Precision Chuck



4000 RPM

T-5540K

2 Speed Drill
w/ 3/8" Keyless Chuck



4000 RPM

The T-5540 precision 3/8" non reversing drill features smooth two speed throttle, strong .7 HP motor, side handle for right or left hand use, quiet rear exhaust and roller bearings in the gears. Choose from three drill chuck options.

Available with 1/2" Keyless Chuck as T-5540K12

T-6768RK

Heavy Duty 3/8" Drill
w/Keyless Chuck



2000 RPM

Super Duty 3/8" and 1/2" Drills

*Convenient Reverse Lever

*Variable Speed Throttle

*Keyless or Keyed Drill Chuck

*Aluminum Housings for Long Life

T-6768R

Heavy Duty 3/8" Drill



2000 RPM

T-6768HRK

Heavy Duty 1/2" Drill
w/Keyless Chuck



500 RPM

T-6768HR

Heavy Duty 1/2" Drill



500 RPM

General purpose drilling made easy with these economical lightweight drills. Tough enough for hole sawing.

T-7454HPR

2600 RPM

**.75HP Heavy Duty
3/8" Reversible Drill**



- *Teasing throttle
- *Exhausts through bottom of handle
- *Convenient forward and reverse lever
- *Built to last

Plenty of power for those tough drilling applications.

T-7757D

**3/8" Straight
High Speed Drill**



25,000 RPM

Compact to work in confined spaces. The T-7757D cannot be damaged by overloading. Drill, brush, hone or deburr without hazard of electric shock. (Not for use with cast wheels or accessories not rated for 25,000 RPM.)

T-7768R

**Super Duty
3/8" Reversible Drill**



1800 RPM

Quality drills for production use. The T-7768R has a convenient forward and reverse lever, rear exhaust and all ball bearing construction. Comes standard with a quality drill chuck with a range of 0 to 3/8" and superior holding power. Variable speed and three gear system make this our best 3/8" drill. T-7768 is the same great tool in forward only.

T-7768

**Super Duty 3/8"
Non Reversible Drill**



1800 RPM

Useful for drilling, grinding and wire brushing. The T-7701D's powerful motor and planetary gear system provide years of trouble free service.

T-7701D

3/8" Straight Drill

2500 RPM



T-7768RAH

3/8" Angle Drill

1800 RPM

Designed to be used in tight areas where only an angle can reach. Compact and easy to use, the angle head can be rotated 360 degrees.



MODELS	RPM	CHUCK SIZE inch	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-5540SPC & K	4000	3/8 & keyless	2.8	7.5	.7	90 PSI MAX	1/4"	15	32
T-6768R	2000	3/8	2.97	7	.5	90 PSI MAX	1/4"	4	26
T-6768RK	2000	3/8 keyless	2.97	7	.5	90 PSI MAX	1/4"	4	26
T-6768HR	500	1/2	3.63	8.25	.5	90 PSI MAX	1/4"	4	27
T-6768HRK	500	1/2 keyless	3.63	8.25	.5	90 PSI MAX	1/4"	4	27
T-7454HPR	2600	3/8	3	7.25	.75	90 PSI MAX	1/4"	6	26
T-7701D	2500	3/8	2.75	7.25	.5	90 PSI MAX	1/4"	6	26
T-7757D	25000	3/8	1.375	6.625	.5	90 PSI MAX	1/4"	6	26
T-7768	1800	3/8	3	7	.5	90 PSI MAX	1/4"	4	16
T-7768R	1800	3/8	3	7	.5	90 PSI MAX	1/4"	4	16
T-7768RAH	1800	3/8"	3.5	6.5	.5	90 PSI MAX	1/4"	4	16

3/8" & 1/2" DRILLS

Taylor

**800
RPM**



T-7768HR
1/2" Reversible Drill
800 RPM

**800
RPM**



T-7768HRK
1/2" Reversible Drill
w/ Keyless Chuck

The T-7768HR and T-7768HRK have convenient forward and reverse lever, rear exhaust and all ball bearing construction.

Quality drills for production use.

← NON-REVERSING →

T-7788N

3/8" Pistol Grip Drill



**2500
RPM**

T-7788FK

3/8" Pistol Grip Drill
w/ Keyless Chuck



**2500
RPM**

- Quality hardened gears
- Rear Exhaust
- Variable Speed
- Lightweight aluminum handle

T-7788R


3/8" Pistol Grip
Reversible Drill



**2500
RPM**

T-7788K

3/8" Pistol Grip
Reversible Drill

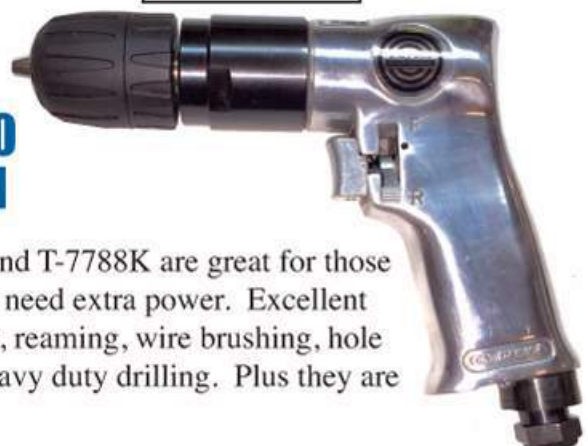

**2500
RPM**

The T-7788R and T-7788K are great for those tough jobs that need extra power. Excellent tool for honing, reaming, wire brushing, hole sawing, and heavy duty drilling. Plus they are reversing.

Pneumatic Tool Company 3/8", 1/2" & 5/8" DRILLS

T-7787RN

**3/8" Reversible
90 Degree Drill**



**1400
RPM**

The perfect tool for working in confined areas. Variable speed lever gives you precise speed control. Plenty of power for the tough jobs.

- Quality hardened gears
- Rear Exhaust
- Variable Speed
- Forward and Reverse
- Angle head reaches into tight areas

T-7788HRK

**1/2" Pistol Grip
Reversible Drill
w/ Keyless Chuck**




A great 1/2" production drill with HiTorque Double reduction gears.

**500
RPM**

T-7788HR

**1/2" Pistol Grip
Reversible Drill**

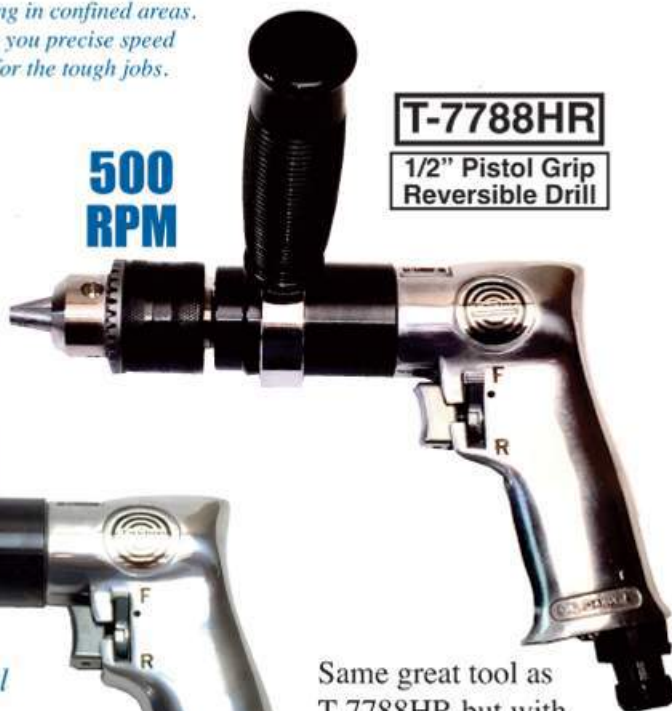

Same great tool as T-7788HR but with a heavy duty keyless chuck

T-9988HRS

**5/8" HD Straight
Reversible Drill**



**1000
RPM**

- Heavy Duty 5/8" Drill
- Plenty of Power
- Side Handle
- Tapered Chuck
- Twin Hammer Clutch

MODELS	RPM	CHUCK SIZE inch	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS. @ LOAD	AIR CONS. @ LOAD
T-7768HR	800	1/2	3.5	7.5	.5	90 PSI MAX	1/4"	4	16
T-7768HRK	800	1/2 keyless	3.5	7.5	.5	90 PSI MAX	1/4"	4	16
T-7787RN	1,400	3/8	2	8.25	.5	90 PSI MAX	1/4"	5	21
T-7788N	2,500	3/8	2	7	.5	90 PSI MAX	1/4"	5	21
T-7788FK	2,500	3/8 keyless	2	7	.5	90 PSI MAX	1/4"	5	21
T-7788R	2,500	3/8	2	7	.5	90 PSI MAX	1/4"	5	21
T-7788K	2,500	3/8 keyless	2	7	.5	90 PSI MAX	1/4"	5	21
T-7788HR	500	1/2	3.5	8.75	.5	90 PSI MAX	1/4"	5	21
T-7788HRK	500	1/2 keyless	3.5	8.75	.5	90 PSI MAX	1/4"	6	24
T-9988HRS	1,000	5/8 taper mount	10.12	15	2	90 PSI MAX	3/8"	6	24

1/4" AIRCRAFT DRILLS (NON-REVERSING)

Taylor

**2800
RPM**

T-7888
w/ 1/4"
Standard Chuck

The T-7888 is a small precision 1/4" drill with plenty of power. Fits in the palm of your hand. Choose from four chuck options.



MODELS	RPM	CHUCK SIZE inch	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-7888	2800	1/4	1.5	6	.3	90 PSI MAX	1/4"	4	15
T-7888KC	2800	1/4 keyless	1.5	6	.3	90 PSI MAX	1/4"	4	15
T-78881B	2800	1/4	1.5	6	.3	90 PSI MAX	1/4"	4	15
T-7888MK	2800	1/4 metal keyless	2.05	6.75	.3	90 PSI MAX	1/4"	4	15
T-7888A	4500	1/4	1.5	6	.3	90 PSI MAX	1/4"	4	15
T-7888AKC	4500	1/4 keyless	1.5	6	.3	90 PSI MAX	1/4"	4	15
T-7888A1B	4500	1/4	1.5	6	.3	90 PSI MAX	1/4"	4	15
T-7888AMK	4500	1/4 metal keyless	2.05	6.75	.3	90 PSI MAX	1/4"	4	15

**4500
RPM**

T-7888A
W/ 1/4"
Standard Chuck

The T-7888A is a small precision 1/4" drill with plenty of power that fits in the palm of your hand. Rubber grip reduces vibration and improves grip.



See drill chucks on page 53

T-9888 1/4" Variable Speed Mini Palm Drill (non-reversible)

The T-9888 is a quality 1/4" drill with the teasing throttle control you need. Multi directional exhaust cover channels exhaust away from user. Quiet and comfortable, the cushioned grip and quiet operation makes this the perfect 1/4" Palm Drill. Shown with precision 1/4" chuck. Also available with 1/4" Composite Keyless chuck as T-9888K, with 1/4" Metal Keyless chuck as T-9888MK and with 1/4" Hi-Precision Geared chuck as T-9888SPC.



T-9888R Reversible 1/4" Variable Speed Mini Palm Drill

The T-9888R is a quality 1/4" drill with the same teasing throttle control as above and a convenient reversing lever. Multi directional exhaust cover channels exhaust away from user. Quiet and comfortable, the cushioned grip and quiet operation makes this the perfect 1/4" Palm Drill. Shown with precision 1/4" chuck. Also available with 1/4" Composite Keyless chuck as T-9888RK and with 1/4" Hi-Precision Geared chuck as T-9888RSPC.



MODELS	RPM	CHUCK SIZE inch	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-9888	2700	1/4	1.54	6.38	.3	90 PSI MAX	1/4"	4	16
T-9888K	2700	1/4 keyless	1.54	6.38	.3	90 PSI MAX	1/4"	4	16
T-9888MK	2700	1/4 metal keyless	2.05	7.5	.3	90 PSI MAX	1/4"	4	16
T-9888SPC	2700	1/4	1.54	6.38	.3	90 PSI MAX	1/4"	4	16
T-9888R	2700	1/4	1.54	6.38	.3	90 PSI MAX	1/4"	4	16
T-9888RK	2700	1/4 keyless	1.54	6.38	.3	90 PSI MAX	1/4"	4	16
T-9888RSPC	2700	1/4	1.54	6.38	.3	90 PSI MAX	1/4"	4	16

The TAYLOR 1/4-28 Drill Motors shown here give a wide range of use for tight spots encountered in aircraft manufacturing and any type of production drilling situation.



Quarter shown for size comparison

All five tools accept 1/4-28 industry standard threaded drill bits. Grease fittings in heads and gear case enable proper lubrication. Use our T-1010 mini grease gun (see page 84) for grease fittings. Angle housings made from solid stock. Smooth quiet operation. Rear Exhaust.

Fits any 1/4-28 threaded spindle with the use of our adapter from tapered shaft (inside chuck) to 1/4-28 thread.

T-9870

1/4-28 Aircraft Drill Motor & 1/4" Collet



The T-9870 & T-9890 give added versatility with their 1/4" collets and threaded collets for 1/4-28 on the T-9870 and 5/16-24 on the T-9890. Quality one piece angle heads and unique lock off levers make these tools long lasting and comfortable to use.



T-9890

5/16-24 Threaded Collet Aircraft Drill Motor & 1/4" Collet



Use as a Buffer, Grinder or Drill

Optional

755338 3" Pad PSA
755338V 3" Velcro Pad
755344 3-1/2" Polishing Pad
(SEE PAGE 34)



Quality Air Tools - Affordable Prices

MODELS	RPM	THREAD SIZE inch	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AIR CONS. @ LOAD
T-9750	2800	1/4-28	1.6	10	.33	90 PSI MAX	1/4"	4
T-9750EX	2800	1/4-28	1.8	13.25	.33	90 PSI MAX	1/4"	4
T-9751	2800	1/4-28	1.6	10	.33	90 PSI MAX	1/4"	4
T-9753	2800	1/4-28	1.98	10.75	.33	90 PSI MAX	1/4"	4
T-9754	2800	1/4-28	1.9	10.25	.33	90 PSI MAX	1/4"	4
T-9870	3000	1/4-28 / 1/4	2.1	9.75	.6	90 PSI MAX	1/4"	5
T-9890	3000	5/16-24 / 1/4	2.1	9.75	.6	90 PSI MAX	1/4"	5

T-9940EXD

Heavy Duty 3/8" Angle Drill

13,500 RPM



The T-9940EXD is an exceptionally Heavy Duty 3/8" Angle Drill. Free Speed is 13,500, Spindle size is 3/8-24, Weight is 4 lbs., length is 12.5". Forward direction only. Air cons. @ load- 26CFM

EXCELLENT FOR DRILLING, GRINDING, WIRE BRUSHING and SANDING

- * Extended angle head and motor parts are hardened and resist wear.
- * Steel housing withstands rugged use.
- * Exhaust deflector rotates to direct air away from the operator and work area.
- * Lock off lever standard

5/8" Drill Chuck w/taper



T-9988HRS-A 5/8" Drill Chuck with TAPERED MOUNT fits T-9988HRS DRILL. Key is T-9988HRS-B, Chuck and key is T-9988HRS-C.

3/4" Drill Chuck w/taper



T-9988HRS34-A 3/4" Drill Chuck with TAPERED MOUNT fits T-9988HRS DRILL. Key is T-9988HRS34-B, Chuck and key is T-9988HRS34-C.

1/8" Drill Chuck T-9750-C

The T-9750-C comes with key & adapter. The adapter is tapered on one end to fit the chuck and has 1/4-28 threads on the other end to fit the tool. This chuck fits the T-9750, T-9750EX, T-9751, T-9753 and T-9754. Key is model T-9750-B. Chuck only is T-9750-A. Adapter is T-9750-D.



1/4" Drill Chucks

T-7888-A 1/4" Drill Chuck Jacobs Multicraft Standard Drill Chuck. 3/8-24 threads. Key is model T-7788-B (fits T-7888-A & T-7788-A chucks). Chuck and key are model T-7888-C. This chuck can be used on forward and reversible drills. Capacity 0 to 1/4".



T-9888-A 1/4" Special Precision Drill Chuck. Machined gear. 3/8-24 threads. Key is model T-9888-B. Chuck and key are model T-9888-C. This chuck can be used on forward and reversible drills. Capacity 0 to 1/4".



T-7888-SPA 1/4" Special Jacobs 1BA Drill Chuck. 3/8-24 threads. Key is model T-7888-SPB. Chuck and key are model T-7888-SPC. This chuck can be used on forward and reversible drills. Capacity 0 to 1/4".



T-9888-SPA 1/4" Special Hi-Precision Drill Chuck. Extra High quality 1/4" chuck. 3/8-24 threads. Machined gear. Key is model T-9888-SPB. Chuck and key are model T-9888-SPC. This chuck can be used on forward and reversible drills. Capacity 0 to 1/4".



T-77887BASPA 1/4" Special Jacobs 7BA Drill Chuck. 3/8-24 threads. Key is model T-77887BASPB. High quality machined gear. Chuck and key are model T-77887BASPC. This chuck can be used on forward and reversible drills. Capacity 0 to 1/4".



T-9888-KC 1/4" Composite Keyless Drill Chuck. This chuck can be used on forward and reversible drills. This unique chuck makes changing bits easy. 3/8-24 threads. Capacity 0 to 1/4".



T-9888-MKC 1/4" Metal Keyless Drill Chuck. Heavy Duty metal chuck stands up to the heaviest use. 3/8-24 threads. This chuck can be used on forward direction drills only.



3/8" Drill Chucks



T-7788S2-A 3/8" Standard Jacobs Multicraft "S2" Drill Chuck. 3/8-24 threads. Key is model T-7788S2-B. Chuck and key are model T-7788S2-C. This chuck can be used on forward and reversible drills. Capacity 3/8".



T-7788-A 3/8" Standard Jacobs Multicraft Drill Chuck. 3/8-24 threads. Key is model T-7788-B. Chuck and key are model T-7788-C. This chuck can be used on forward and reversible drills. Capacity 3/8".



T-7768R41BA-A 3/8" Special Jacobs 41BA Drill Chuck. 3/8-24 threads. Key is model T-7768R41BA-B. High quality machined gear. Chuck and key are model T-7768R41BA-C. This chuck can be used on forward and reversible drills. Capacity 3/8".



T-77882BASPA 3/8" Special Jacobs 2BA Drill Chuck. 3/8-24 threads. Key is model T-77882BASPB. High quality machined gear. Chuck and key are model T-77882BASPC. This chuck can be used on forward and reversible drills. Capacity 3/8".



T-7768R-SPA 3/8" Special Hi-Precision Drill Chuck. 3/8-24 threads. Machined gear. Key is model T-7768R-SPB. Chuck and key are model T-7768R-SPC. This chuck can be used on forward and reversible drills. Capacity 3/8".



T-7788-KC 3/8" Composite Keyless Drill Chuck. This chuck can be used on drills with forward and reverse. 3/8-24 thread Drill Chuck. Capacity 3/8".

1/2" Drill Chucks



T-7788HR-KCN 1/2" Keyless Drill Chuck. Makes changing drill bits easy. This chuck can be used for forward and reversible drills. 3/8-24 threads. 1/2" capacity.



T-7788HR-A 1/2" Standard Jacobs Multicraft Drill Chuck. 3/8-24 threads. Key is model T-7788HR-B. Chuck and key are model T-7788HR-C. This chuck can be used on forward and reversible drills. Capacity 1/2".

T-2420EX

Push to Start Auto
Shut off Screwdriver

- *Reversible
- *Rear Exhaust
- *Accurate Torque
- *Adjustable Torque
- *3.5mm Hex Drive



Comes with adjusting wrenches, and 6 screwdriver bits.

T-2430EX

Push to Start Auto
Shut off Screwdriver

- *Reversible
- *Rear Exhaust
- *Accurate Torque
- *Adjustable Torque
- *1/4" Hex Drive



Manual torque adjustment - tighten or loosen internal spring

T-2440EX

Push to Start Auto
Shut off Screwdriver



Manual torque adjustment - tighten or loosen internal spring

MODELS	RPM	HEX DRIVE	CLUTCH TYPE	LENGTH in.	WEIGHT lbs.	TORQUE Range in.lb.	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-2420EX	800	3.5MM"	Int.Adj.	7.5	.8	3.11 - 10.67	90 PSI MAX	1/4"	3	7
T-2430EX	1000	1/4"	Ext.Adj.	10.25	1.6	10.67 - 19.56	90 PSI MAX	1/4"	4	10
T-2440EX	600	1/4"	Ext.Adj.	11.25	2.25	17.78 - 42.67	90 PSI MAX	1/4"	5	12
T-7761	1600	1/4"	Int.Adj.	8.875	1.25	30 - 70	90 PSI MAX	1/4"	4	12
T-7761AH	1500	1/4"	Int.Adj.	10	1.8	30 - 70	90 PSI MAX	1/4"	4	12
T-7744S	9000	1/4"	Impacting	6.5	3	160 Ft.Lbs.	90 PSI MAX	1/4"	3	13

T-7761

1/4" Straight Handle
Screwdriver



The T-7761 & T-7761AH are reversible and produce accurate torque. The clutches are internally adjustable and feature rear exhaust.

T-7761AH

1/4" Right Angle
Screwdriver



T-7744S

1/4" Impacting
Screwdriver



Impacting clutch provides plenty of torque.

Convenient forward and reverse button is located just above the trigger.

Quick change bit holder - pull back to release bits.

Built in regulator.

SCREWDRIVERS

Taylor

These pistol grip screwdrivers are light and comfortable. Rear exhaust directs air away from the operator and muffles the exhaust noise. Location of reverse lever makes changing directions easy.

T-7763
1/4" Screwdriver
1800 RPM



- *Lightweight
- *Reversible
- *Ergonomic Handle
- *Internally adjustable clutch
- *Rear Exhaust
- *Precision bearings and gears

T-7766
Positive Clutch Screwdriver
1800 RPM



The T-7766 Positive Clutch Screwdriver gives the operator manual control of clutch engagement and release by applied pressure. Great for applications where running torque is greater than final torque.

T-7766HR
Positive Clutch Externally Adjustable 1/4" Screwdriver
800 RPM



- *Reversible
- *Ergonomic Handle
- *Externally adjustable clutch (pull and twist outside housing)
- *Rear Exhaust

T-7763S 800 RPM
1/4" Straight Handle Screwdriver



T-7763SH 1800 RPM
1/4" Straight Handle Screwdriver



Lightweight and easy to use. The T-7763S & T-7763SH are strong and powerful. Bail Hangers, rear exhaust, reversible, internally adjustable.

776337A
20-90
in. lbs.



776337B
45-115
in. lbs.



776337C
45-145
in. lbs.



The torque on the T-7763, T-7763EX, T-7763S, T-7763SH & T-7764EX can be further changed by switching the spring in the clutch.



1800 RPM T-7763EX
1/4" Externally Adjustable Clutch Screwdriver



800 RPM T-7764EX
1/4" Externally Adjustable Clutch Screwdriver

These pistol grip screwdrivers are light and comfortable. Rear Exhaust directs air away from the operator and muffles exhaust noise. Location of reverse lever makes changing directions easy.

T-8863S 8500 RPM

1/4" Straight Impacting Screwdriver



- *Convenient 1/4" Quick change bit holder
- *Lightweight aluminum handle
- *Easy to use forward and reverse lever
- *Hanger included

T-9963 2500 RPM

1/4" Direct Drive Screwdriver



T-9963HR 1000 RPM

1/4" Direct Drive Screwdriver



The T-9963 & T-9963HR have composite handles, precision bearings and gears as well as being light in weight and easy to use. Great for maintenance.

MODELS	RPM	HEX DRIVE	CLUTCH TYPE	LENGTH in.	WEIGHT lbs.	TORQUE Range in.lb.	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-7763	1800	1/4"	INT.ADJ.	7	2.5	45 - 115	90 PSI MAX	1/4"	4	16
T-7763EX	1800	1/4"	EXT.ADJ.	8.25	3.1	45 - 145	90 PSI MAX	1/4"	4	16
T-7763S	800	1/4"	INT.ADJ.	11	2.66	45 - 115	90 PSI MAX	1/4"	4	16
T-7763SH	1800	1/4"	INT.ADJ.	10.75	2.6	45 - 145	90 PSI MAX	1/4"	4	16
T-7764EX	800	1/4"	EXT.ADJ.	8.5	3.1	45 - 115	90 PSI MAX	1/4"	4	16
T-7766	1800	1/4"	POSITIVE	6.5	2.25	115	90 PSI MAX	1/4"	4	16
T-7766HR	800	1/4"	EXT.ADJ.	7.27	3	45 - 115	90 PSI MAX	1/4"	4	16
T-8863S	8500	1/4"	Impacting	8.27	2.51	175	90 PSI MAX	1/4"	6	20
T-9963	2500	1/4"	Direct Drive	6	1.7	65	90 PSI MAX	1/4"	3	14
T-9963HR	1000	1/4"	Direct Drive	6.75	2	85	90 PSI MAX	1/4"	4	16

RIVETING HAMMERS

Taylor

.401 Shank Rivet Guns

.498 Shank Rivet Guns



Straight Handle Rivet Guns

T-4120
Spring for
T-1X and T-1XS

***Note:**
T-1X and T-1XS use special "JIFFY" style .401 shank rivet sets for riveting capabilities in extremely tight areas.

Model #	T-5X	T-7X	T-9X
Shank Diameter	.498	.498	.498
Bore & Stroke	3/4"X2-11/16"	3/4"X5-13/16"	3/4"X3-7/8"
Blows per Min.	1800	900	1150
Length	8-15/16"	11-15/16"	9-15/16"
Weight	4-3/4 lbs.	6 lbs.	5-1/8 lbs.
Air Pressure	90 PSI Max.	90 PSI Max.	90 PSI Max.
Aluminum Rivet Capacity	1/4"	3/8"	5/16"
Air Cons. @ Load	14	14	14

These tools are extremely powerful for heavy duty riveting. They also perform well for front end work, removal of heavy duty spring bushings and pins and any type of truck or off road equipment requiring driving, hammering, ripping, scraping or punching.

Model #	T-1X/T-1XS	T-2X/T-2XS	T-3X/T-3XS	T-4X/T-4XS
Shank Diameter	.401 (Jiffy Style)	.401	.401	.401
Bore & Stroke	9/16 x 1-7/8"	1/2"X2-1/4"	1/2"X2-7/8"	1/2"X3-1/16"
Blows per Min.	2850	2600	2100	1700
Length	4"	6-11/16"	7-5/16"	8-5/16"
Weight	2-1/8 lbs.	2-1/4 lbs.	2-5/16 lbs.	2-3/4 lbs.
Air Pressure	90 PSI Max.	90 PSI Max.	90 PSI Max.	90 PSI Max.
Aluminum Rivet Capacity	1/8"	1/8"	3/16"	1/4"
Air Cons. @ Load	9	9	9	9

- *Extra sensitive teasing throttle
- *Lightweight aluminum handle
- *Hardened tool steel piston and steel alloy cylinder for long life
- *Spool valve for slow heavy blows needed to drive rivets

T-5710
Brass Multi
Position
Regulator
1/4" NPT



T-5711
Brass Regulator
1/4" NPT



T-6922
Hose Swivel
1/4" NPT



T-6922R
Regulated Hose
Swivel
1/4" NPT



T-5120
Quick
Change
Spring for
.401 Shank
Hammers

T-5210
Beehive
Spring for
.401 Shank
Hammers

T-4120
Spring for
T-1X and
T-1XS

T-6120
Quick
Change
Spring for
.498 Shank
Hammers

T-6210
Beehive
Spring for
.498 Shank
Hammers

T-7922
Hose Swivel
1/4" NPT

T-7922R
Regulated
Hose Swivel
1/4" NPT

T-5830
Mini Oiler
1/4" NPT





T-7151

Super Duty .401 Air Hammer

T-7111

Super Duty .401 Air Hammer

	T-7151	T-7111
Shank Diameter	.401	.401
Bore & Stroke	3/4"X3-1/2"	3/4"x2-1/2"
Blows per minute	2100	3500
Length	8-7/8"	6-3/4"
Weight	4.5 lbs.	3.5 lbs.
Air Pressure	90 PSI Max.	90 PSI Max.
Air Inlet	1/4" NPT	1/4" NPT
Air Cons.@ load	18	18

- *Steel alloy barrels and heat treated pistons
- *Lightweight aluminum handles

Plenty of power for the toughest jobs. Will drive pins, cut sheet metal, scrape or cut steel, aluminum, wood, stone or concrete. The T-7151 has a longer stroke and heavier piston. The T-7111 has a shorter stroke and piston and higher BPM making it more suitable for panel cutting.

*Now available:
T-7111AT Needle Scaler
attachment for the T-7111
& T-7151. Or order T-7111C
or T-7151C as the complete
tool.*



T-7151C

T-7111C

T-7513

.401 Aluminum Safety Chuck



T-7514

.401 Quick Change Ball Type Retainer



T-5120

.401 Quick Change Spring



T-5210

.401 Beehive Spring



.401 Shank Chisels

These chisels fit the T-2X, T-3X, T-4X Rivet Hammers, the T-7111 and T-7151 Air Hammers, as well as any hammer that accepts .401 shank chisels. Forged steel.

- T-4030**
Tapered Punch
- T-4040**
Cold Chisel
3/4" Wide
- T-4060**
Spot Weld Buster
- T-4090**
Special Panel Cutter
- T-4091**
Scraper Blade
8" x 1-3/4"



- T-4100**
Double Bladed Panel Cutter
- T-4177**
Star Drill 3/4"
- T-4191**
Scraper Blade
14" x 1-1/2"
- T-4192**
Cold Chisel
14" x 3/4"
- T-4220**
Scraper Blade
1-1/4 wide



.498 Shank Chisels

These chisels fit the T-5X, T-7X, T-9X Rivet Hammers, as well as any hammer that accepts .498 shank chisels. Forged steel.

T-5020

Blank Chisel



T-5030

Tapered Punch



T-5040

Cold Chisel
3/4" Wide



T-5100

Double Bladed
Panel Cutter



T-5220

Scraper Blade
1-1/4" Wide



The T-7121 is a Super Duty Air Hammer that produces up to 3000 blows per minute at 90 PSI. Excellent for cutting, crimping, driving pins, bushings, shearing and for front end work. Long life cylinder with hardened and ground piston. Metal valve blocks.

Uses quick change spring T-712117 (included with tool)

T-7121

Super Duty .401
Air Hammer



T-7121K

Kit includes:

- T-4030
- T-4040
- T-4060
- T-4090
- T-4100
- 712120
- T-712117

Shank Diameter	.401
Bore & Stroke	3/4" X 2-9/32"
Blows per minute	3000
Length	7.63"
Weight	3.5 lbs.
Air Pressure	90 PSI Max.
Air Inlet	1/4" NPT
Air Cons. @ load	18

see additional
chisels on page 59


Quick change retainer for T-7121 is our 712120.



T-5T

Long Reach Sand Rammer

The T-5T Sand Rammer is a hard hitting Heavy Duty Rammer built for production use in foundries, construction sites, utility companies or wherever a Rammer is used.

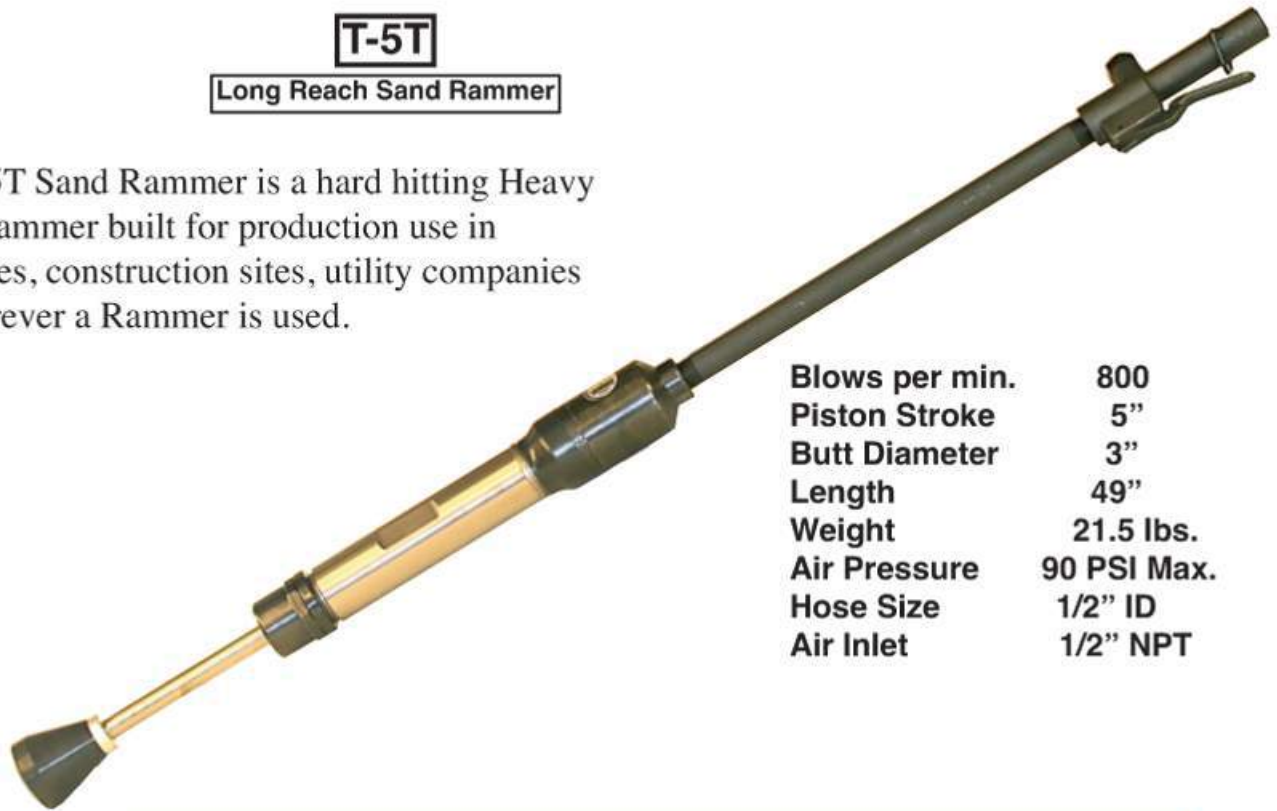

Blows per min.	800
Piston Stroke	5"
Butt Diameter	3"
Length	49"
Weight	21.5 lbs.
Air Pressure	90 PSI Max.
Hose Size	1/2" ID
Air Inlet	1/2" NPT

T-2005

One Shot Hammer



T-8005

One Shot Hammer



Our One Shot hammers are designed for operations requiring less power, including driving oil seals, bushings and pins. Every pull of the lever delivers a single blow that can be regulated by adjusting the air pressure.

	T-2005	T-8005
Shank Diameter	.401	.401
Blows per Actuation	1	1
Length	8-3/8"	10"
Weight	2 lbs.	2.86 lbs.
Air Pressure	90 PSI Max.	90 PSI Max.
Air Inlet	1/4" NPT	1/4" NPT

.680 Rd. Shank Oval Collar & .580 Hex

**Top Quality 4 Bolt
Chipping Hammers**

**Forged "D" Handles
Hardened Valves**

Quality you can count on

**Available for non-turning
hex chisels (H models)**

T-#24B




or
T-#24BH
(hex shank chisels)

T-#34B



or
T-#34BH
(hex shank chisels)

T-#44B

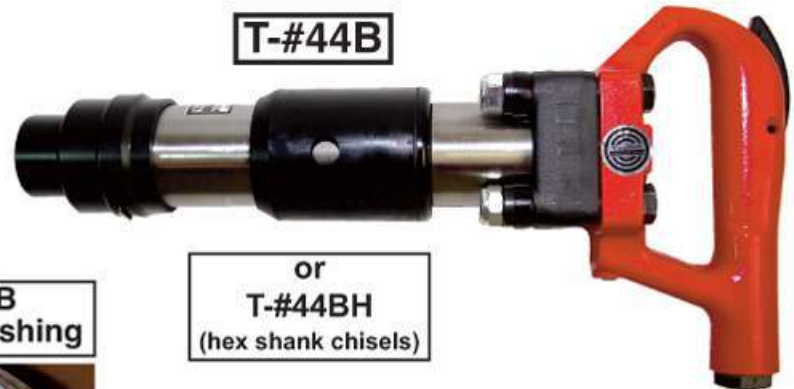

or
T-#44BH
(hex shank chisels)

Hex Chisel



**T-#24BH
Hex Bushing**

Round Chisel



**T-#24B
Round Bushing**



SEE PAGE 64 FOR CHISELS

MODELS	STROKES per.min.	BORE & STROKE	LENGTH in.	WEIGHT lbs.	SHANK Diameter	AIR PRESSURE	AIR INLET NPT	AIR CONS. @ LOAD
T-#2	2150	1-1/8" X 2"	15.5	14.5	.680	90 PSI MAX	3/8"	25
T-#3	1900	1-1/8" X 3"	16.25	15.625	.680	90 PSI MAX	3/8"	26
T-#4	1500	1-1/8" X 4"	18.25	16.875	.680	90 PSI MAX	3/8"	27
T-#24B&BH	2400	1-1/8" X 2"	14.4	17.5	.680/.580hex	90 PSI MAX	3/8"	25
T-#34B&BH	1920	1-1/8" X 3"	15.75	18.5	.680/.580hex	90 PSI MAX	3/8"	26
T-#44B&BH	1500	1-1/8" X 4"	19.8	19.8	.680/.580hex	90 PSI MAX	3/8"	27

The T-#2, #3, #4 Chipping hammers are designed for heavy duty use. Solid steel construction and hard hitting tool steel pistons give years of service. Use 90 PSI to get maximum life. Higher pressure shortens tool life.

All three Chipping Hammers take round shank oval collar chisels and come complete with the #23431N3 chisel retainer.
HEX BUSHINGS AVAILABLE FOR ALL 3 TOOLS

.680 Rd. Shank Oval Collar

T-#2

Chipping Hammer



T-#3

Chipping Hammer



T-#4

Chipping Hammer



Chipping Hammer Accessories

These accessories fit our T-#2, T-#24B, T-#3, T-#34B, T-#4 & T-#44B Chipping Hammers as well as any chipping hammer that accepts .680 round shank oval collar chisels or .580 hex shank chisels like the T-#24BH, T-#34BH and T-#44BH Four Bolt Chipping Hammers.

T-#23450 Hose Swivel-7/8-24
 Fits our T-#2,3,4 Chipping Hammers only.
 Remove air inlet - add swivel.



T-#23451 Hose Swivel-3/8" NPT
 Fits all Chipping Hammers w/3/8" NPT air inlet. Screws into air inlet.



#23431N3

Chisel Retainer



RETAINER SPRING
 fits both retainers

#23434N3



T-7516

Quick Change Ball Type Retainer



These Chisels fit our T-#2, T-#3, T#4, T#24B, T#34B and T-#44B Hammers. Made of forged steel.

.680 Round Shank Oval Collar Chisels

- T-1101 Cold Chisel 9"- 1" wide
- T-1108 Cold Chisel 12"- 1" wide
- T-1108-18 Cold Chisel 18" - 1" wide
- T-1101W2 Wide Chisel 9" (shown) 2" wide
- T-1108W2 Wide Chisel 12" (not shown) 2" wide
- T-1108-18W2 Wide Chisel 18" (not shown) 2" wide
- T-1110W45 4.5" Wide Chisel 11" (shown)
- T-1180 Moil Point 9" (shown)
- T-1182 Moil Point 12" (not shown)
- T-1182-18 Moil Point 18" (not shown)
- T-1103 Bushing Tool 9-1/2" (shown)



These Chisels fit our T-#24BH, T-#34BH and T-#44BH Made of forged steel. .580 HEX

.580 Hex Shank Oval Collar Chisels

- T-1108H-18 Cold Chisel 18" - 1" wide
- T-1108H-12 Cold Chisel 12"- 1" wide
- T-1108H Cold Chisel 9"- 1" wide
- T-1101W2H Wide Chisel 9" (shown)
- T-1108H-W2 Wide Chisel 12" (not shown)
- T-1108H-18W2 Wide Chisel 18" (not shown)
- T-1180H Moil Point 9" (shown)
- T-1182H Moil Point 12" (not shown)
- T-1182-18H Moil Point 18" (not shown)
- T-1103H Bushing Tool 9-1/2"



Chipping Hammer RETAINERS for .580 and .680 chisels

#23431N3 Comes as standard equipment on all our Chipping Hammers



T-7516 Quick Change Ball Type Retainer (optional) fits all Chipping Hammers



T-#23451 Hose Swivel-3/8"NPT Fits all Chipping Hammers Screws into 3/8" air inlet.



T-#23450 Hose Swivel-7/8-24 Fits our T-#2,3,4 Chipping Hammers. Remove air inlet - add swivel.

RETAINER SPRING Fits both retainers above #23434N3



T-6125

Needle Scaler

T-6125A

Weld Flux Scaler



T-612525

T-6125A18



T-6125A4-12



T-6125A4-9



T-6125A8



T-6125A1



T-6125A2



T-6125A3

The T-6125 has many applications. Chipping concrete and brick, cleaning castings and paint and rust removal. Remove the needle scaler attachment and add the T-6125A8 chisel to use this tool for scaling. (Order chisels separately) Or use model T-6125C for needle scaler with chisel. T-6125 comes with T-6125A8 Chisel as shown.

All three needle scalers have lever throttles, precision machined and hardened parts and feature all steel construction.

T-7356

Needle Scaler

T-7356A

Weld Flux Scaler



**OUR MOST POPULAR NEEDLE SCALER
ALL STEEL CONSTRUCTION**



T-7356SL

Needle Scaler w/Safety Lever




The T-7356 has many applications. Chipping concrete and brick, cleaning castings and paint, and rust removal. Remove the needle scaler attachment T-7356AT and add the T-7356A8 chisel to use this tool for scaling. (order chisels separately)

The T-7356V has an adjustable vacuum shroud brush attachment. The shroud is effective at trapping and removing coatings, corrosion and other debris dislodged by needle scaler.

These scalers work on almost any surface including irregular shapes such as tubing, rivet heads, steel window sills, weld seams, corners, edges, bearing mounts, concrete and many other applications.

T-7356V

Needle Scaler
Vacuum Ready

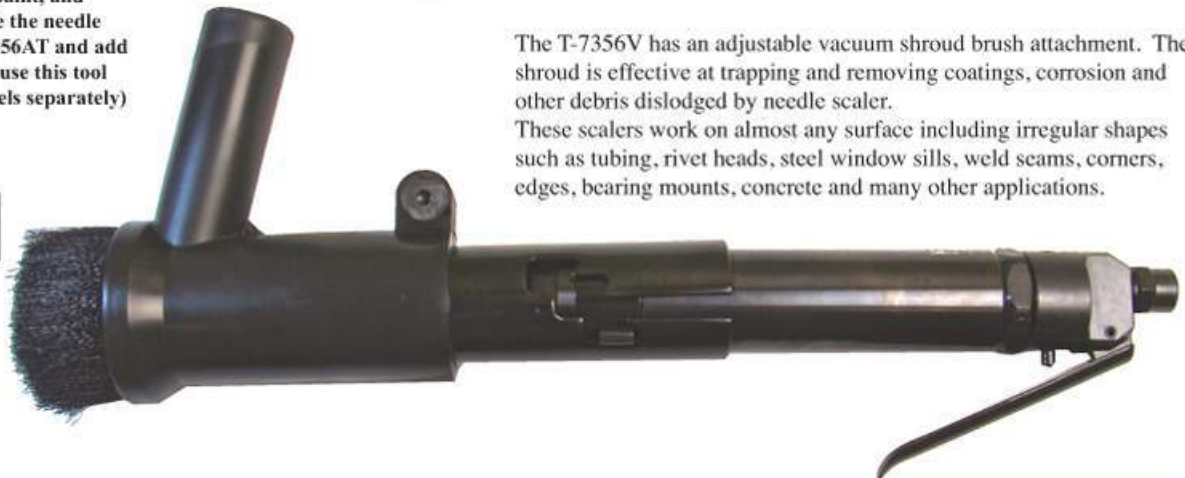

MODELS	BLOWS per.min.	# of NEEDLES	LENGTH in.	WEIGHT lbs.	AIR PRESSURE	AIR INLET NPT	AIR CONS. @ LOAD
T-6125	4500	19	17.5	6	90 PSI MAX	1/4"	10
T-6125A	4500	-	10.25	3.75	90PSI MAX	1/4"	10
T-7356	4500	19	17.5	6	90PSI MAX	1/4"	10
T-7356A	4500	-	10.25	3.75	90PSI MAX	1/4"	10
T-7356V	4500	19	17.5	6	90PSI MAX	1/4"	10

NEEDLE SCALERS WELD FLUX SCALER

Taylor

T-7601


Pistol Grip Needle Scaler



A great tool for heavy duty scaling, the T-7601 has a well cushioned rubber handle, heat treated piston and barrel.

T-7601AH

Pistol Grip Weld Flux Scaler

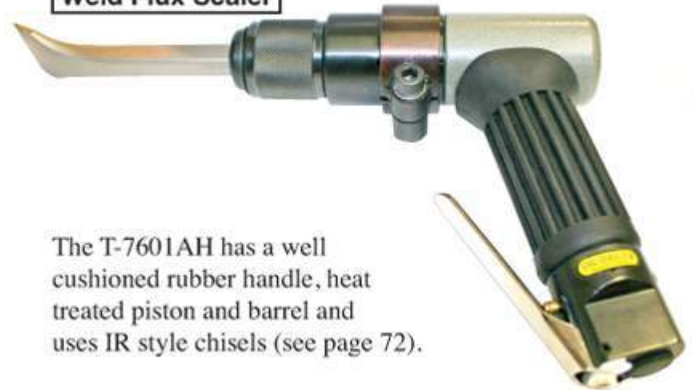

The T-7601AH has a well cushioned rubber handle, heat treated piston and barrel and uses IR style chisels (see page 72).

T-7601V

Pistol Grip Needle Scaler Vacuum Ready



The T-7601V has an adjustable vacuum shroud brush attachment. The shroud is effective at trapping and removing coatings, corrosion and other debris dislodged by the needle scaler.

These scalers work on almost any surface including irregular shapes such as tubing, rivet heads, steel window sills, weld seams, corners, edges, bearing mounts, concrete and many other applications.

T-7602

Extra Heavy Duty Needle Scaler



Heavy duty needle scaler comes with 35 4MM needles. A big tool for big jobs. Hardened steel parts, 35 needles covers a large areas. Comfortable rubber grip.

The T-7182 can be changed into a weld flux scaler by simply removing the scaler tube and mushroom chisel and inserting a scraper blade or punch. Changing chisels is easy: a twist of the chisel retainer releases the steel ball holding the chisel and chisels may then slide in or out. Uses IR style chisels. T-7182 is Needle Scaler. T-7182A is Weld Flux Scaler comes with 1-1/4" angle scraper. (T-7601AH8)

T-7182

Needle Scaler



T-7182A

Weld Flux Scaler



- *Precision machined and hardened parts
- *Lever throttle
- *All steel construction
- *Needles adjust to contours of the work
- *Ball retainer

T-8601

Vibration Dampened
Pistol Grip Needle Scaler



T-8602

Vibration Dampened
Pistol Grip Needle Scaler



The T-8601 and T-8602 have many applications:
Chipping concrete and brick, cleaning castings
and paint and rust removal.

Vibration dampening feature lessens operator fatigue.
Comfortable rubber grip. Needles adjust to contours.
Precision machined and hardened parts.

MODELS	BLOWS per.min.	# of NEEDLES 3mm	LENGTH in.	WEIGHT lbs.	AIR PRESSURE	AIR INLET NPT	AIR CONS. @ LOAD
T-7182	4000	19	16.375	6	90 PSI MAX	1/4"	8
T-7182A	4000	-	8.5	3.8	90 PSI MAX	1/4"	8
T-7601	3000	19	10	5.7	90 PSI MAX	1/4"	8
T-7601AH	3000	-	8.5	5.7	90 PSI MAX	1/4"	8
T-7601V	3000	19	10	5.7	90 PSI MAX	1/4"	8.5
T-7602	2200	35-4mm	20	13	90 PSI MAX	1/4"	15
T-8601	1800	19	18.5	8.15	90 PSI MAX	1/4"	25
T-8602	2400	19	17.2	7.23	90 PSI MAX	1/4"	25



T-7356K

Needle Scaler Kit

The T-7356K includes The T-7356, T-7356A8 1-1/4 Angle Chisel, T-7356A1 Diamond Point Chisel, T-7356A4 3/4" Cold Chisel, extra set of 7" Needles (not shown) and molded carrying case.

T-6356

Mini Needle Scaler



Needle Diameter	3mm
# of needles	12
Piston Stroke	1"
Strokes per min.	4200
Length	12.32"
Weight	2.5 lbs.
Air Pressure	90 PSI Max.

The T-6356 is compact and easy to use. Solid steel construction, hardened and ground parts and precision machining make it hard hitting and perfect for tight spots. Uses same needles as our popular T-7356. *T-735646 set of 19 needles.*
T-635646 set of 12 needles



T-735646B

Thousand Pack
1000 needles

TAYLOR T-735646B *Box-O-Needles*

1000 pcs. 3MM x 7" Needles

These needles fit Taylor Pneumatic's T-6125, T-7356, T-7601, T-7182, T-8601, T-8602 and T-6356 needle scalers and many similar types.

Box of 1000 needles is the least expensive way to purchase. Quantity works out to be slightly over 52 sets of 19 needles. Needles come packed in 10 bags of 100. Weight is 23 lbs.
T-735646B

T-735646H

Hundred Pack
100 needles



T-735646

Individual Pack
19 needles



Small tune-up kit. Contains part #'s 2,3,4,5,6,38,39, 46,47,48

T-7356SK



Large tune-up kit. Contains part #'s 2,3,4,5,6,7,9,28(2pcs), 29,30(2pcs),31,32,33, 38,39,45,46,47,48

T-7356LK



LONG REACH SCRAPER SCALING HAMMER

Taylor

T-7603K

Long Reach Scraper Kit



T-760326
4" Chisel 19/32 HEX



T-760326C
2-3/4" Chisel



T-760326B
2" Chisel



T-760326A
1-1/2" Chisel

T-7603AT converts T-7603 into Long reach NEEDLE SCALER w/19 4mm needles(Optional)



The T-7603K comes with three extension bars - two at 19-1/2" and one at 12". The three examples on the right show some of the many combinations in which this tool can be used - from 24" to 83". If you already own a T-7603, you can turn it into a NEEDLE SCALER by adding the T-7603AT needle scaler attachment.

OPTIONAL ACCESSORIES



T-760384
4" Chisel 19/32 HEX

T-760386
8" Flex Blade
Must be used with
T-760384




T-760387
12" Flex Blade
Must be used with
T-760384



- *Custom molded case
- *Heavy duty
- *Extra long reach
- *Excellent for tile removal
- *Rubber handle grips
- *Includes 4", 1-1/2", 2" and 2-3/4" scraper blade chisels (T-760326, 26A, 26B, and 26C)

T-7603NS

Long Reach Needle Scaler

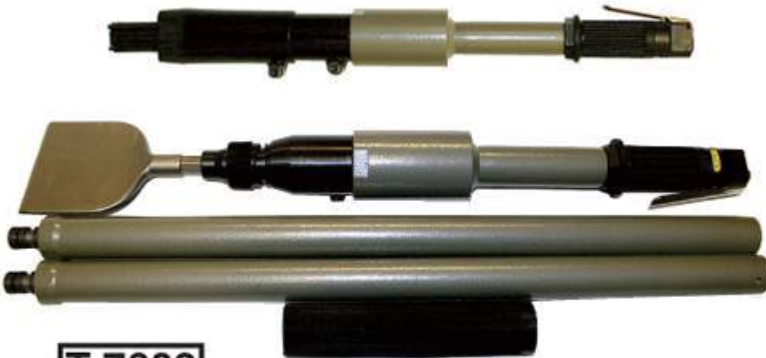

T-7603

Long Reach Scraper

The T-7603 and T-7603NS come with the two extension bars shown above. The examples on the right show the various lengths that can be achieved. The lengths are from left to right 71" Overall length, 47" O.A.L. and 24" O.A.L. If you already own a T-7603, you can turn it into a needle scaler by adding the T-7603AT needle scaler attachment.

- *Extra long reach
- *Rubber handle grips
- *Includes 4" scraper blade chisel (T-760326)
- *Heavy duty
- *Excellent for tile removal

T-7603AT converts T-7603 into Long reach needle scaler (optional)



T-760326A
1-1/2" Chisel
Optional

T-760326
4" Chisel
comes with the T-7603.
19/32" HEX



Optional Wide Flex Blades are available on page 70



T-7604A

Triple Head Scaling Hammer



- *Quick removal of old paint, rust, scale and concrete
- *Heat treated piston and cylinders
- *Rapid vibratory action for fast material removal

5.25"

T-7605

Single Head Scaling Hammer



MODELS	BLOWS per.min.	BORE & STROKE	LENGTH in.	WEIGHT lbs.	AIR PRESSURE	AIR INLET NPT	AIR CONS. @LOAD
T-7603	2200	1.12X1.53	24 to 83	13.5	90 PSI MAX	1/4"	13
T-7603NS	2200	1.12X1.53	24 to 83	13.5	90 PSI MAX	1/4"	13
T-7604A	3000	1.1 X 1	21	9	90 PSI MAX	3/8"	8
T-7605	2800	1.06 X 1	19.9	4.18	90 PSI MAX	3/8"	6

Accessories for Needle Scalers, Weld Flux Chippers & Scrapers

Chisels for the T-7356A and T-7356 (Cleco Style)

- T-7356A1**
Diamond Point
- T-7356A2**
Panel Cutter
- T-7356A3**
Blank
- T-7356A4**
3/4" Cold Chisel
- T-7356A7**
2" Scraper Blade
- T-7356A8**
1-1/4" Angle Chisel
- T-7356A9**
3" Scraper Blade
- T-7356A18**
18" Long Reach Scraper

Chisels for the T-7601AH and T-7182A (IR Style)

- T-7601AH8**
1 1/4" Angle Chisel
- T-7601AH9**
3/4" Angle Chisel
- T-7601AH1**
Diamond Point Chisel

Chisels for T-7603 19/32" Hex

- T-760326**
4" Scraper Blade Chisel
- T-760326A**
1-1/2" Chisel
- T-760384** 4" Chisel
accepts **T-760387** & **T-760386**
- T-760387**
- T-760386**

T-7356AT

Needle Scaler Attachment for T-7356 and T-7356A


T-735646 Needles (19 pack) for T-7356 and T-7601
3MM - 7" long

T-7603AT Converts a T-7603 to a Needle Scaler w/19 4MM needles 7" Long

7603AT22 (19 pack) for T-7603

T-7602 Needles

760223 (35 pack) 4MM 7" Long

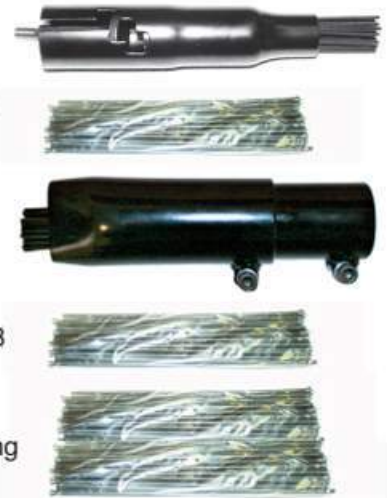

T-7922

Hose Swivel
1/4" NPT



T-7922R

Regulated
Hose Swivel
1/4" NPT



T-7824

18" Whip Hose 1/4" NPT
Attach 1/4" NPT female to the tool, then accessories or quick disconnects



T-8128
Gal.

See Page 35 for more accessories

T-8032
Qt.

T-8004
4 Oz.



Taylor Pneumatic Air Tool Oil is specifically blended to remove harmful deposits that can build up in your tool. It also emulsifies with moisture to protect internal steel parts and bearings.

NOTE: The most effective time to oil a tool is right after use. Put a teaspoon or two in the air inlet, run the tool for a second or two to coat all internal parts.

T-6401

1/8" Economy Pencil Grinder
54,000 RPM



T-7401

54,000 RPM Pencil Grinder



T-7402

70,000 RPM Pencil Grinder



The perfect tools for cleaning and polishing dies, porting and polishing engines, de-burring castings and any job where carbide burrs or stones are used for delicate material removal.

The T-7401 and T-7402 now come in a storage case with oil bottle, quick disconnect fitting, T-5830 oiler and 2 collet wrenches.



T-7459R

1/8" 90 degree Angle
Pencil Grinder 23,500 RPM



T-7469R

1/8" 45 degree Angle
Pencil Grinder 23,500 RPM



**3mm and 3/32 collets available*

MODELS	RPM	COLLET	LENGTH in.	WEIGHT lbs.	THROTTLE	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-6401	54,000	1/8"	5.5	3.75	TWIST	90 PSI MAX	1/4"	4	7
T-7401	54,000	1/8"	5.5	3.75	TWIST	90 PSI MAX	1/4"	4	7
T-7402	70,000	1/8"	5	4.75	TWIST	90 PSI MAX	1/4"	4	7
T-7459R	23,500	1/8"	5	4.75	TWIST	90 PSI MAX	1/4"	4	7
T-7469R	23,500	1/8"	5.5	3.75	TWIST	90 PSI MAX	1/4"	4	7

DIE GRINDERS

Taylor

T-6757R

1/4" Rear Exhaust
Economy Die Grinder



.5 HP

Compact to work in close quarters, the T-6757R can not be damaged by overloading. Drill, brush, hone and deburr without hazard of electric shock. Use accessories rated for the RPM of the tool.

T-6758R

1/4" Rear Exhaust
Economy Die Grinder



.25 HP

T-6757R & T-6758R
*Direct Drive
*Rear Exhaust
*Full Ball Bearing Construction
*Lock off Lever

T-6759R
*Hardened Spiral Bevel Gears
*Rear Exhaust
*Full Ball Bearing Construction
*Lock off Lever

T-6758R fits in the palm of your hand. Easy accessibility to confined areas.

T-6759R

1/4" Rear Exhaust Angle
Economy Die Grinder



.25 HP

T-6759R - Angle head design has a comfortable grip. Excellent for grinding, polishing, deburring and breaking sharp edges.

T-7757REN T-7757R

RPM	25,000	25,000
Collet Size	1/4"	1/4"
Length	13-1/4"	6-5/8"
Weight	2-3/5 lbs.	1-3/8 lbs.
Air Pressure	90 PSI	90 PSI
Air Inlet	1/4" NPT	1/4" NPT

T-7757R

1/4" Rear Exhaust
Die Grinder



.5 HP

The extended design allows you to reach deep into areas that would be impossible with other tools.

*Direct Drive
*Rear Exhaust
*Full Ball Bearing Construction
*Powerful .5 HP motor

T-7757REN

1/4" Rear Exhaust
Extended Die Grinder



.5 HP

OPTIONAL: 1/8" collet (T-7508) available for all the above

MODELS	RPM	COLLET in.	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-6757R	22,000	1/4"	1.2	6.25	.5	90 PSI MAX	1/4"	13	26
T-6758R	25,000	1/4"	.75	6	.25	90 PSI MAX	1/4"	12	24
T-6759R	25,000	1/4"	1.05	6	.25	90 PSI MAX	1/4"	11	22
T-7757R	25,000	1/4"	1.3	6.5	.5	90 PSI MAX	1/4"	13	20
T-7757REN	25,000	1/4"	2.75	13.25	.5	90 PSI MAX	1/4"	13	26
T-7758	25,000	1/4"	.625	5.25	.25	90 PSI MAX	1/4"	12	24
T-7759	25,000	1/4"	.9	5.25	.25	90 PSI MAX	1/4"	11	22
T-7758R	25,000	1/4"	.8	6	.25	90 PSI MAX	1/4"	12	24
T-7759R	25,000	1/4"	1	6.25	.25	90 PSI MAX	1/4"	11	22
T-7758RE	25,000	1/4"	1.25	10.25	.25	90 PSI MAX	1/4"	11	22

T-7758 1/4" Front Exhaust Die Grinder

- *Direct Drive
- *Front Exhaust
- *Full Ball Bearing Construction
- *Powerful .25 HP motor

Our smallest and lightest Die Grinder, the T-7758 fits in the palm of your hand. Easy accessibility to confined areas.

.25 HP



T-7759 1/4" Front Exhaust Right Angle Die Grinder

- *Hardened spiral bevel gears
- *Front Exhaust
- *Full Ball Bearing Construction
- *Powerful .25 HP motor
- *Grease fitting in head
- *Lock off lever

Front exhaust Angle design provides comfortable grip. Strong and reliable, the T-7759 is excellent for grinding, polishing, deburring and breaking sharp edges in confined areas.

.25 HP



T-7758R 1/4" Rear Exhaust Die Grinder

- *Direct Drive
- *Rear Exhaust
- *Full Ball Bearing Construction
- *Powerful .25 HP motor

The T-7758R fits in the palm of your hand. Easy accessibility to confined areas.

.25 HP



T-7759R 1/4" Rear Exhaust Right Angle Die Grinder

- *Hardened spiral bevel gears
- *Rear Exhaust
- *Full Ball Bearing Construction
- *Powerful .25 HP motor
- *Grease fitting in head
- *Lock off lever

Angle design provides comfortable grip. Strong and reliable, the T-7759R is excellent for grinding, polishing, deburring and breaking sharp edges in confined areas.

.25 HP



T-7758RE 1/4" Rear Exhaust Extended Die Grinder

- *Direct Drive
- *Rear Exhaust
- *Full Ball Bearing Construction
- *Powerful .25HP Motor

The extended design allows you to reach deep into areas that would be impossible with other tools.

.25 HP



OPTIONAL: 1/8" collet (T-7508) available for all the above

COLLETS



1/4" T-7504 1/8" T-7508
Fits all die grinders shown

7779RN

1/4" Pistol Grip Die Grinder



RPM	20,000
Collet Size	1/4"
HP	.5
Weight	1.5 lbs.
Air Pressure	90 PSI Max.

- *Precision bearings
- *Rear exhaust
- *Direct drive motor
- *Lightweight

T-7308

1/4" Die Grinder



RPM	22,000
HP	.33
Length	5 5/8"
Weight	1.25 lbs.
Air Inlet	1/4"NPT
Air Pressure	90 PSI MAX

A great 1/4" Die Grinder with front exhaust and lock off lever. Powerful, lightweight, all ball bearing construction, direct drive. A long lasting quality die grinder.

T-8128

1 Gal



T-8032

1 Qt



T-8004

4 Oz



Taylor Pneumatic Air Tool Oil is specifically blended to remove harmful deposits that can build up in your tool. It is also formulated to emulsify with moisture to protect internal steel parts and bearings.

Note:

The most effective time to oil a tool is right after use. Put a teaspoon or two in the air inlet, run the tool for a second or two to coat all internal parts. Now the tool can be stored for long periods..

T-9930A

Super Duty Die Grinder 1/4" Collet

Used for grinding, blending, deburring, cleaning and smoothing in fab shops, refineries, power plants, ship yards and foundries and a wide variety of manufacturing industries as well as maintenance and repair operations.

T-9930B

Super Duty Die Grinder 3/8" Collet

1 HP



993026A 1/4" COLLET (included)
993026B 3/8" COLLET (optional)

T-9930EXA

Super Duty 1/4" Extended Die Grinder

T-9930EXB

Super Duty 3/8" Extended Die Grinder



1 HP

T- 9930A & B & T-9930EXA & EXB

- * 22,000 RPM free speed
- * Available with 1/4" or 3/8" high quality collet
- * Steel housing withstands rugged use
- * Motor parts are hardened and resist wear from contamination

- * Lock off lever standard
- * T-9930A & B Front Exhaust
- * T-9930EXA & EXB Rotating Side Exhaust

T-9957RE

1/4" Extended Die Grinder



.9 HP

T-9959REA

1/4" Right Angle Die Grinder



.9 HP

The T-9957RE is a Super Duty Extended Die Grinder with magnesium/aluminum body, comfort grip handle, lock off lever and side exhaust.

Same great tool as above. Angled head & 1/4" collet. Short head great for getting into tight spaces.

MODELS	RPM	COLLET	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AVG. AIR CONS.	AIR CONS. @ LOAD
T-7308	22,000	1/4"	1.25	5.625	.33	90 PSI MAX	1/4"	10	32
T-7779RN	20,000	1/4"	1.5	6.5	.5	90 PSI MAX	1/4"	6	12
T-9930A	22,000	1/4"	2.64	6.75	1	90 PSI MAX	1/4"	10	32
T-9930B	22,000	3/8"	2.62	6.75	1	90 PSI MAX	1/4"	10	32
T-9930EXA	22,000	1/4"	3.63	12.5	1	90 PSI MAX	1/4"	10	32
T-9903EXB	22,000	3/8"	3.63	12.5	1	90 PSI MAX	1/4"	10	32
T-9957RE	15,000	1/4"	3.3	14.5	.9	90 PSI MAX	3/8"	15	25
T-9957REA	15,000	1/4"	4.45	14.5	.9	90 PSI MAX	3/8"	15	25

T-9758R Heavy Duty 1/4" Rear Exhaust Die Grinder



.33 HP

T-9759R Heavy Duty 1/4" Rear Exhaust Angle Die Grinder



.33 HP

T-9758 Heavy Duty 1/4" Front Exhaust Die Grinder



T-9759 Heavy Duty 1/4" Front Exhaust Angle Die Grinder



The "9 Series" Die Grinders are made for demanding applications. Hardened steel end plates and precision motor parts provide long life. These tools are smooth and quiet, with plenty of power. Angle heads have spiral bevel gears. The "R" tools have rear exhaust. Tools without an "R" have front exhaust.

T-9757R Heavy Duty 1/4" Rear Exhaust Die Grinder



.6 HP

T-9755R Heavy Duty 1/4" Rear Exhaust Die Grinder



.9 HP

T-9757 Heavy Duty 1/4" Front Exhaust Die Grinder



T-9755 Heavy Duty 1/4" Front Exhaust Die Grinder



T-9969R

Heavy Duty .9 HP
Angle Die Grinder

Powerful, lightweight and easy to use, this grinder makes quick work of grinding steel, aluminum, composites and wood. Built-in regulator for positive speed control. Hardened cylinder and end plates. Rear exhaust. 105° angle head.



.9 HP

The T-9958 is an all steel bodied 1/4" Precision Die Grinder. Has a side exhaust and easy to use safety lever. Built for the roughest use. Collet and foundation are one piece.

T-9958

1/4" Precision
Side Exhaust Die
Grinder



.4 HP

T-9901RN

Heavy Duty 1/4" Rear
Exhaust Die Grinder

The T-9901RN features a low 3,800 RPM, easy to use safety lock off lever, sure grip rubber handle cover and plenty of power.



.9 HP

COLLETS



1/4" T-7504 1/8" T-7508

Fits all die grinders shown
except T-9958

T-9959R

Heavy Duty 1/4" Right
Angle Die Grinder



.9 HP

The T-9957R is based on the same .9 HP motor as the T-9901RN. 11,000 rpm speed and short angle head make this tool ideal for tight work areas.

MODELS	RPM	COLLET inch	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-9755/R	18,000	1/4"	1.5	8	.9	90 PSI MAX	1/4"	12	20
T-9757/R	20,000	1/4"	1.32	6.25 / 7	.6	90 PSI MAX	1/4"	11	19
T-9758/R	25,000	1/4"	.8	5.25 / 6	.33	90 PSI MAX	1/4"	8	17
T-9959/R	25,000	1/4"	.9	5.5 / 6.25	.33	90 PSI MAX	1/4"	8	17
T-9901RN	3,800	1/4"	2.2	8	.9	90 PSI MAX	1/4"	14	24
T-9957R	11,000	1/4"	1.75	6.75	.9	90 PSI MAX	1/4"	14	24
T-9958	24,000	1/4"	1.8	7.5	.4	90 PSI MAX	1/4"	12	22
T-9969R	9,000	1/4"	2.2	9	.9	90 PSI MAX	1/4"	12	20

T-7758KSA

Sanding Kit

Includes T-7758 Die Grinder and 10 grinding stones, 1/8" collet, male quick disconnect, sanding cylinder holders and sandpaper cylinders.



T-7759KSA

Sanding Kit

Includes T-7759 Angle Die Grinder and 10 grinding stones, 1/8" collet, male quick disconnect, 2" and 3" Pad Holders and Sanding Discs.



T-7759KSU

Surface Prep Kit

Includes T-7759 Angle Die Grinder and 10 grinding stones, 1/8" collet, male quick disconnect, 2" and 3" Pad Holders and Surface Prep Pads.



T-7759RK3

Belt Sander, Die Grinder, Drill Kit

3/8" X 13" Belt Sander converts to 1/4" Angle Die Grinder and 3/8" Angle Drill.



T-8857RE

Extended 25" Die Grinder

The T-8857RE is a Heavy Duty Extended Die Grinder. Its length of 25 inches gets you into really tight spots and the .9 horsepower motor provides all the power you need. The collet provides maximum gripping strength because both ends of the collet are slotted.



The T-8957R is a remarkable tool. The direction of rotation can be changed to throw grinding sparks the opposite direction. This allows the operator to avoid contaminating nearby materials.

T-8957R

1/4" Reversible Die Grinder



MODELS	RPM	COLLET inch	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AVERAGE AIR CONS.	AIR CONS. @ LOAD
T-8857RE	18,000	1/4"	1.6	7.25	.9	90 PSI MAX	1/4"	14	24
T-8957R	22,000	1/4"	3.8	25.25	.9	90 PSI MAX	1/4"	14	24

T-8857R

1/4" Rear Exhaust
Die Grinder

← 6.9" →



T-8859R

1/4" Rear Exhaust
Angle Die Grinder



T-8869R

1/4" Rear Exhaust
115° Angle Die Grinder



115° Angle Head makes certain applications more convenient and more desirable for operators.

The T-8857R, T-8859R and T-8869R are .45 HP cushioned grip die grinders. With plenty of power and their compact size, these tools are a must for production grinding. As with all die grinders, use of balanced stones and accessories are required. Also using a maximum of 90 PSI at the tool and oiling daily at the end of each shift will give extended life to the tool.



1/4" T-7504 1/8" T-7508

Fits all die grinders shown
(see pages 82 & 83)

T-8758R

1/4" Rear Exhaust
Die Grinder



T-8759R

1/4" Rear Exhaust
Angle Die Grinder



T-9901RN

1/4" Super Duty
Die Grinder .9 HP



Low Speed High Torque

If you need torque in a die grinder, the T-9901RN is for you. The .9 HP motor is strong and compact. Aluminum handle is comfortable and easy to grip.

The T-8758R and T-8759R are the .35 HP version of the T-8859R. With plenty of power and their smaller size, these tools are a must for production grinding. As with all die grinders, use of balanced stones and accessories are required. Also using a maximum of 90 PSI at the tool and oiling daily at the end of each shift will give extended life to the tool.

MODELS	RPM	COLLET inch	WEIGHT lbs.	LENGTH in.	HP	AIR PRESSURE	AIR INLET NPT	AVG. AIR CONS.	AIR CONS. @ LOAD
T-8758R	22,000	1/4"	1	6	.35	90 PSI MAX	1/4"	4	19
T-8759R	22,000	1/4"	1.2	6	.35	90 PSI MAX	1/4"	4	19
T-8857R	21,000	1/4"	1.2	6.9	.45	90 PSI MAX	1/4"	6	22
T-8859R	18,000	1/4"	1.7	7	.45	90 PSI MAX	1/4"	6	22
T-8869R	18,000	1/4"	1.7	8	.45	90 PSI MAX	1/4"	6	22
T-9901RN	3,800	1/4"	2.2	9	.9	90 PSI MAX	1/4"	14	28

Collets

T-7504

1/4"



T-7508

1/8"



T-3804

Cutoff Wheel Mandrel
3/8" Arbor
Fits any 1/4" collet



T-5712

Regulator With Gauge



T-5711

Brass Regulator
1/4" NPT



T-5710

Brass Multi-Position
Regulator
1/4" NPT



T-1010

Mini Grease Gun



T-7922

Hose Swivel
1/4" NPT



T-7922R

Hose Swivel
w/ Regulator
1/4" NPT



T-7824

18" Whip Hose
w/ 1/4" NPT
(male and female)



T-5830

Mini Oiler
1/4" NPT



The T-1010 Mini Grease Gun can be used for the T-7759R, T-7769R, T-8759R, T-8859R, T-8869R, T-9750, T-9750EX, T-9751, T-9753 & T-9754. Also for any small grease fittings to lube parts, gears, bearings etc.

Taylor Pneumatic Air Tool Oil is specifically blended to remove harmful deposits that can build up in your tool. It is also formulated to emulsify with moisture to protect internal steel parts and bearings.

Note:

The most effective time to oil a tool is right after use. Put a teaspoon or two in the air inlet, run the tool for a second or two to coat all internal parts. Now the tool can be stored for long periods.

AIR TOOL OIL

T-8128
1 Gal



T-8032
1 Qt



T-8004
4 Oz



The T-7891N and T-7892N are air over hydraulic riveters. The large canister on the bottom contains an air piston. When activated by the trigger, air pushes the piston into a reservoir of oil that in turn pushes another piston compounding the force and pulls the rivet.

The grip of both tools is adjustable. They can be adjusted to hold the rivet mandrel tightly so that it will not fall out before insertion, or it can be adjusted to fit loosely in the jaws. Both tools include see through mandrel catchers and a hanger eye on top of the tool.

- *Made for production
- *Heavy duty construction
- *Hardened jaws and nosepiece
- *Pulls standard steel, stainless steel, aluminum and plastic rivets.

T-7891N

3/16" Heavy Duty Riveter



Tool includes 3/16", 5/32", 1/8" and 3/32" nosepieces.



Hi-Volume Rivet Mandrel Catcher
Optional - 789122HV
for 3/16" models only

T-7892N

1/4" Heavy Duty Riveter



Tool includes 1/4", 7/32", 3/16", 5/32", 1/8" and 3/32" nosepieces.
Not for 1/4" monobolts.
Will pull smaller size monobolts.

Can be ordered in a convenient carrying case as T-7891NK or T-7892NK

T-7892NK



T-7891NK

MODELS	CAPACITY inch	PULLING FORCE	WEIGHT lbs.	HEIGHT in.	STROKE inch	AIR PRESSURE	AIR INLET NPT	AVG. AIR CONS.
T-7891N	3/16"	2,300	3.125	10.25	to 9/16	90 PSI MAX	1/4"	1
T-7892N	1/4"	3,500	3.75	11.75	to 11/16	90 PSI MAX	1/4"	1
T-7891NK	3/16"	2,300	3.125	10.25	to 9/16	90 PSI MAX	1/4"	1
T-7892NK	1/4"	3,500	3.75	11.75	to 11/16	90 PSI MAX	1/4"	1

T-7891A

3/16" Heavy Duty Long Nose Riveter



This tool has an extended nose for those hard to reach fasteners. Pulls 1/8", 5/32", 3/32" and 3/16" rivets. (not monobolts)

T-7892A

1/4" Heavy Duty Long Nose Riveter



Tool includes 1/4", 7/32", 3/16", 5/32", 1/8" and 3/32" nosepieces. Not for 1/4" monobolts. Will pull smaller sizes.

T-7893N

1/4" Super Duty Riveter



Tool includes 1/4" and 3/16" nosepieces. Extra long air cylinder creates more pulling force.

- *Heavy duty construction
- *Hardened jaws and nosepiece
- *Will pull standard steel, stainless steel, aluminum and plastic rivets.

THE T-7893N IS DESIGNED TO PULL 1/4" MONOBOLTS

- *Super duty construction
- *Hardened jaws and nosepiece
- *Pulls standard steel, stainless steel, aluminum, plastic rivets and monobolts up to 1/4"

T-9010

1/4" Hand Riveter



The T-9010 includes 1/4", 3/16", 5/32" and 1/8" nosepieces.

- * Heavy duty construction
- * Double gear reduction system easily pulls 1/4" split and steel rivets.
- * Extra long handles for more leverage and reach
- * Ideal for steel, stainless steel, aluminum, formica and masonite
- * Hardened jaws and nose kit
- * Extended nosepiece available (T-901009A)

MODELS	CAPACITY	PULLING FORCE	WEIGHT lbs.	HEIGHT inch	STROKE inch	AIR PRESSURE	AIR INLET NPT	AVG. AIR CONS.
T-7891A	3/16"	2,300	3.5	10.25	9/16	90 PSI MAX	1/4"	1
T-7892A	1/4"	3,500	4.25	11.75	11/16	90 PSI MAX	1/4"	1
T-7893N	1/4"	3,850	4.25	12.50	11/16	90 PSI MAX	1/4"	1
T-9010	1/4"	N/A	3.7	21"(LENGTH)	23/32			



T-3000C51A
1.5" Yoke



T-3000C51B
3" Yoke



T-3000C51C
2.5" Longeron Yoke



T-3000C51D
4" Yoke

T-3000C

C-Type Single Cylinder Rivet Squeezer w/ 2 Yokes 3" & Longeron



T-3000C15

C-Type Single Cylinder Rivet Squeezer 1.5" Yoke



T-3000CL

C-Type Single Cylinder Rivet Squeezer Longeron Yoke



T-3000C3

C-Type Single Cylinder Rivet Squeezer 3" Yoke



T-3000A

A-Type Single Cylinder Rivet Squeezer 1.5" Yoke



T-3000A3

A-Type Single Cylinder Rivet Squeezer 3" Yoke



T-6000A15

A-Type Double Cylinder Rivet Squeezer 1.5" Yoke



T-6000C3

C-Type Double Cylinder Rivet Squeezer 3" Yoke



T-6000A3

A-Type Double Cylinder Rivet Squeezer 3" Yoke



Used to squeeze a wide range of sizes and types of rivets. The T-3000C, T-3000A, T-6000C, and T-6000A's are commonly used for pressing, stamping and staking in manufacturing industries ranging from electronic components, boats, aircraft, automotive assemblies, trucks and buses. Compression force is multiplied by the unique cam and wedge design. Throttle control allows ease of use. Operation of the tool is quiet yet gives great accuracy and productivity. The T-6000 series tools give twice the force of the T-3000 tools.

- BUILT-IN SWIVEL, QUALITY ALUMINUM CASTING, AND ALLOY STEEL YOKE
- USES INDUSTRY STANDARD .187 (3/16") SHANK SQUEEZE SETS AND DIMPLE DIES
- QUALITY HEAT TREATED STEEL YOKES

"C" SQUEEZERS

"A" SQUEEZERS

"A" SQUEEZERS

"C" SQUEEZERS

T-6000C15

C-Type Double Cylinder Rivet Squeezer 1.5" Yoke



MODELS	RIVET CAPACITY ALUM.	RIVET CAPACITY STEEL	WEIGHT lbs.	LENGTH in.	COMPRESSION FORCE	AIR PRESSURE	AIR INLET NPT
T-3000C	1/8	3/32	4.5	10.25	3,000	90 PSI MAX	1/4"
T-3000C15	1/8	3/32	4.5	10.25	3,000	90 PSI MAX	1/4"
T-3000CL	1/8	3/32	4.5	10.25	3,000	90 PSI MAX	1/4"
T-3000C3	3/32	1/16	4.5	10.25	1,800	90 PSI MAX	1/4"
T-3000A	1/8	3/32	4.5	10.25	3,000	90 PSI MAX	1/4"
T-3000A3	3/32	1/16	4.5	10.75	1,800	90 PSI MAX	1/4"
T-6000C15	3/16	5/32	5.5	14	6,000	90 PSI MAX	1/4"
T-6000C3	3/16	5/32	6	13.25	4,100	90 PSI MAX	1/4"
T-6000A15	3/16	5/32	6	14	6,000	90 PSI MAX	1/4"
T-6000A3	1/8	3/32	5.5	13.25	4,100	90 PSI MAX	1/4"

Turns Straight Drills Into Angle Drills

T-DA90

3/8" Drill Attachment

- *3/8" Jacobs Chuck
- *Requires only 4" Clearance
- *One to one gear ratio
- *Not for use with bits larger than 3/8"



T-SP90

1/2" Drill Attachment


- *1/2" Jacobs Chuck
- *Requires only 5-1/2" Clearance
- *One to one gear ratio
- *Not for use with bits larger than 1/2"



T-3010

Air Grease Gun

- *Easy to load
- *Easily accesses hard to reach areas
- *Continuous flow when trigger is depressed

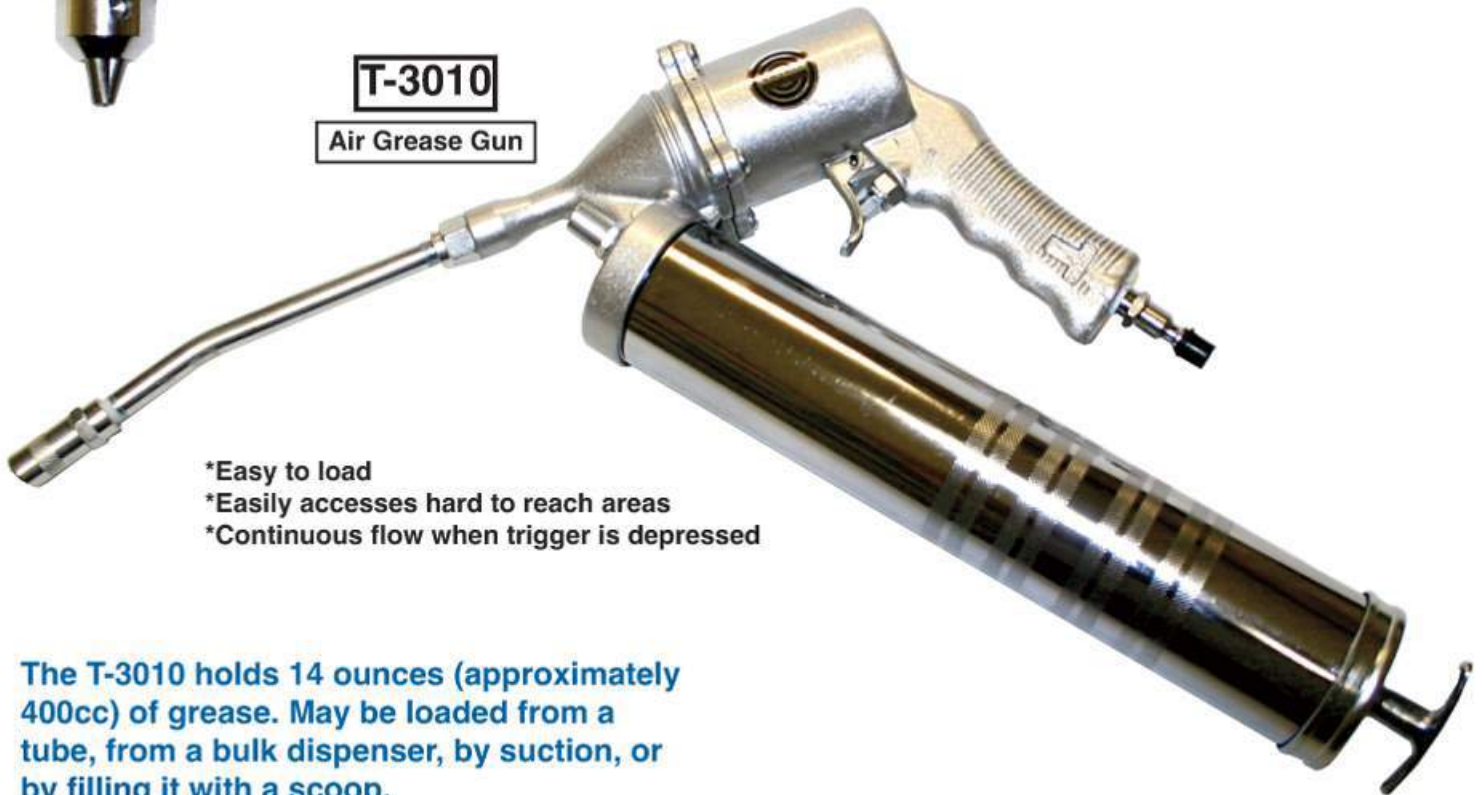

The T-3010 holds 14 ounces (approximately 400cc) of grease. May be loaded from a tube, from a bulk dispenser, by suction, or by filling it with a scoop.

Ideal for patchwork and roughing up the low spots before recapping.

T-7002A

Low Speed Tire Buffer



- *Built in regulator
- *Lightweight aluminum
- *Lock off lever
- *Rear exhaust
- *T-7002A44 Carbide Wheel included

RPM	2500
Length	9-1/8"
Weight	1-3/4 lbs.
Air Pressure	90 PSI Max.
Air Inlet	1/4" NPT

T-7007N

Spray Gun & No Drip Cup

Cup Capacity	1 Qt.
Nozzle Tip	1.8mm
Fluid Inlet	3/8" NPS
Weight Gun & Cup	1.2 lbs.
Air Pressure	30 to 70 PSI
Air Consumption	8.5 to 12 CFM
Compressor Required	1-1/2 HP Min.



These tools are a must for every sheet metal and body shop

T-7580

5/16" Punch Flange



Punch Size	5/16"	3/16"
Length	10"	10"
Weight	1-1/4 lbs.	1-1/4 lbs.
Tool Diameter	2-1/4"	2-1/4"
Air Inlet	1/4" NPT	1/4" NPT
Air Pressure	90 PSI Max.	90 PSI Max.

T-7581

3/16" Punch Flange



- *Head swivels 360 degrees
- *Lightweight
- *Crimps up to 14 gauge steel. Punches 18 gauge
- *Tool steel punch and punch guide

T-7616

**Air Scribe
(carbide tip)**

Writes as easily as a ball point pen on steel, glass, wood and ceramics.



Length 4"
Weight 6 oz.
Hose Length 5 ft.
Air Pressure 90 PSI Max.

- *Lightweight
- *Marks on materials up to 64R in hardness
- *Trouble free piston design
- *Low air consumption
- *Twist throttle

T-9616

**Air Scribe/
Mini Chisel Kit**

Kit includes 3 chisels and 1 scribe tip



The T-9616 is designed for durability and comfort. Hex shank chisels vibrate at 13,500 blows per minute. This tool comes complete with an 8 ft. high quality hose and filter. The filter element strains out foreign particles that might impair tool operations and can be removed and cleaned. Low air consumption and lightweight make this a must for writing on materials such as glass, steel, wood, plastic or any type of metal. Tool converts to light scaler or hammer for driving pins, peening, deburring, or trimming. Writes on materials up to 64RC hardness. Simple mechanism for trouble free use. Twist throttle with graduations for accurate speed control. Convenient carrying case included.



T-7700N

**Heavy Duty
Metal Shear**

Make distortion free cuts with the T-7700N and T-7701. The blades shear the material giving a clean cut. A 1/4" strip of material is removed by the cutting action or can be used to trim one edge. Loosen one screw to rotate head 360 degrees.

	T-7700N	T-7701
Steel Capacity	18 gauge	18 gauge
RPM	2500	2500
Length	8"	10"
Weight	3 lbs.	3 lbs.
Air Inlet	1/4" NPT	1/4" NPT
Air Pressure	90 PSI	90 PSI

- *Rear Exhaust
- *Lightweight aluminum housing
- *Variable speed
- *Leaves a clean edge
- *Powerful



T-7701

**Heavy Duty
Metal Shear**

Cuts hard to cut steel siding, flexible plastic, rubber and wire mesh. Top blade moves, bottom blade stationary.

T-7701SS

**Straight Handle
Scissor Shear**

	T-7701SS	T-7700SS
RPM	2500	2500
Length	11-3/4"	12-1/2"
Weight	3 lbs.	3 lbs.
Air Pressure	90 PSI	90 PSI



T-7700SS

**Pistol Grip
Scissor Shear**

- *Lightweight
- *Air regulator
- *Steel handle
- *Lever throttle

T-7703

Gasket Scraper



Strokes per min. 4500
 Bore & Stroke 1/4" X 2-1/4"
 Length 5-1/4"
 Weight 2 lbs.
 Air Inlet 1/4" NPT
 Air Pressure 90 PSI Max.

The perfect tool for removal of dried out gasket material. The T-7703 will not harm underlying surface when using at the correct angle.

- *Fast metal removal
- *Built-in silencer
- *4 files included
- *Lever throttle
- *Uses 1/4" round shank files

T-7705

Heavy Duty Reciprocating File



Strokes per min. 10,000
 Stroke 1/8"
 Length 6-7/8"
 Weight 2-1/2 lbs.
 Air Inlet 1/4" NPT
 Air Pressure 90 PSI Max.

Built for production, the T-7705 comes complete with round, flat, triangular and bastard files. Order extra file set part T-770501 (4 pcs.)

T-7618

Air Caulking Gun



- *Variable speed trigger
- *Strong steel tube cover
- *Lightweight die cast handle
- *Uses standard 10 oz tubes
- *Can be used with all types of caulking material



T-7711

Air Nibbler

Strokes per min. 2,600
 Width of cut 7/32"
 Max. Steel Thickness 18 gauge
 Length 7"
 Weight 2.2 lbs.
 Air Inlet 1/4" NPT
 Air Pressure 90 PSI MAX.

- *Teasing Throttle
- *1/2 HP motor provides power through hardened planetary gear system
- *Cutting head adjustable 360 degrees in 90 degree increments

SAWS

Taylor

T-7702

Reciprocating Mini Saw


Strokes per min.	10,000
Stroke	1/4"
Weight	1-3/8 lbs.
Length	7-1/8"
Air Inlet	1/4" NPT
Air Pressure	90 PSI Max.
Hose Size	3/8" ID
Blades	3.5" x 14, 18, 24 & 32 TPI
CFM @ Load	5

Small and easy to use, the T-7702 cuts straight and curved shapes. Cuts aluminum, mild steel, plastic and fiberglass with ease. Comes with two blades (24 & 32 TPI).



- *Lightweight
- *Adjustable guard for depth of cut
- *Built-in regulator

Order extra blades in packs of 10 pcs, part# T-770214(14TPI), T-770218(18TPI), T-770224(24TPI) or T-770232(32TPI). (seen on right)

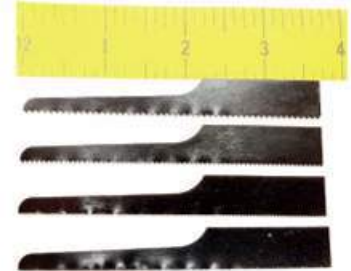

T-8802A

Heavy Duty Reciprocating Saw



Includes hose swivel, carrying case, wrench and a selection of blades. Shank is 1/2" - blade 3/4".

Strokes per Minute	0 to 1200
Stroke Length	1-3/4"
Length	18.1"
Weight	6.2 lbs.
Height	5-1/4"
Width	1-5/16"
Air Inlet	1/4" NPT
Air Pressure	90 PSI Max.
Hose Size	3/8" ID
CFM@Load	8

The T-8802A has variable speed, uses standard sawsall blades and has double pistons that produce plenty of power. Stroke length gives added blade life. Designed for heavy duty use in ship yards, factories, refineries for manufacturing and repair applications.

T-9902

Vibration Reduced Saw (9500 SPM)

SPM	9500
Stroke Length	.75"
Length	11.75"
Weight	1.2 lbs.
Air Pressure	90 PSI Max.
CFM @ Load	6
Blades	5.5" x 18, 24, 32 TPI

shown at right

part# T-990218, T-990224, T-990232 Will also use T-770214, 18, 24 & 32 TPI blades.



Patented vibration and noise reduced saw cuts steel, aluminum, stainless steel, wood, plastic and fiberglass with ease. Comes with the T-7922 hose swivel and safety lock off lever. Lightweight and powerful cutting action make this a must have tool. Will easily cut wooden 2 X 4's. The beauty of this saw is the 3/4" stroke, which uses more of the teeth on each stroke. Adjustable blade guard. Comes with three blades.

Both tools are lightweight, powerful production routers. Easily adjustable. Direct drive motors have no gears to wear. Complete with lock off levers and rear exhaust. All aluminum router base.

T-8705R
 .5 HP Router



T-9705R
 .9 HP Router



Model #	HP	Collet Size	RPM	Length	Weight	Air Inlet	Average Air Cons.	Pressure
T-8705R	.5	1/4"	22,000	7.125"	1.85 lb.	1/4"	8	90 PSI
T-9705R	.9	1/4"	18,000	7.75"	2 lb.	1/4"	12	90 PSI

T-7780

**Palm Grip
Nail Driver**



Nail Capacity 60 penny
Blows per min. 1000
Length 4-7/8"
Weight 2-3/8 lbs.
Air Inlet 1/4" NPT
Air Pressure 90 PSI Max.

- *Operates in any position
- *Tool stops when nail is set
- *Drives up to 60 penny nails
- *Pressure activated

Slight downward pressure activates the driving cycle. Tool comes with guide bushing for larger nails as well as finish nails.

T-7781

**Palm Grip
Air Hammer**



Blows per min. 1000
Length 4-1/2"
Weight 2 lbs.
Air Inlet 1/4" NPT
Air Pressure 90 PSI Max.

Replaces mallets and hammers in close quarter situations. Installs dowel pins, screen splines and is excellent for autobody panel bumping. Includes 778103A plastic, 778103B aluminum and 778103C steel tips.

Oscillations per min. 20,000
 Stroke Arc 3 degrees
 Length 7.6"
 Weight 2.7 lbs.
 Air Inlet 1/4" NPT
 Air Pressure 90 PSI Max.
 Hose Size 3/8" ID

T-7838

Heavy Duty Sealant
 Cutter/Scraper

SEE PAGE 96 FOR BLADES

blade included

OUR BEST WINDSHIELD TOOL

A must for every glass shop. Cuts encapsulated glass with ease. Also works great for cutting material out of expansion joints. Sharp blades and cutting action of this tool make for an excellent caulking and putty scraper - even cuts wood. Double head bearings for trouble free service. Complete with exhaust hose and T-783851 2-1/2" Offset Blade.



- *Built-in regulator
- *Full 1/2 HP motor
- *Multi-position blade holder
- *20,000 oscillations/min
- *Lightweight

T-7838B

Windshield
 Removal Tool



blade included

Oscillations per min. 20,000
 Stroke Arc 3 degrees
 Length 4.5"
 Weight 2.2 lbs.
 Air Inlet 1/4" NPT
 Air Pressure 90 PSI Max.
 Hose Size 3/8" ID

- * Built-in regulator
- * Full 1/2 HP motor
- * Multi-position blade holder
- * 20,000 oscillations/min
- * Front Exhaust

A must for every glass shop. Our T-7838B is a quality tool at an affordable price.

T-7838D

Windshield
 Removal Tool

Oscillations per min. 20,000
 Stroke Arc 3 degrees
 Length 7-1/2"
 Weight 2 lbs.
 Air Inlet 1/4" NPT
 Air Pressure 90 PSI Max.
 Hose Size 3/8" ID



blade included

The T-7838D comes complete with air supply hose and exhaust hose. Also provided is our T-783851 2-1/2" offset blade. This tool is a must for every glass shop and may be used with a wide range of blades.



Blades for the T-7838, T-7838B, T-7838D

Taylor Pneumatic knife blades are made for cutting urethane-bonded windows in automobiles and all types of vehicles. These blades may also be used to cut rubber belting and construction applications involving sealing compounds in joints.

T-783851
2 1/2" Offset



T-783853A
3 1/2" Hook Blade



T-783852
Straight Blade



T-783855
3/4" Hook Blade



T-783853
Curved Blade



T-783857
1 1/2" Hook Blade



T-783854
3 1/2" Offset



T-783867
Scraper Blade



T-783858
2 1/2" Hook Blade



T-8128
1 Gal.

AIR TOOL OIL

Taylor Pneumatic Air Tool Oil is specifically blended to remove harmful deposits that can build up in your tool. It is also formulated to emulsify with moisture to protect internal steel parts and bearings from rusting.

Note:

The most effective time to oil a tool is right after use. Put a teaspoon or two in the air inlet, run the tool for a second or two to coat all internal parts. Now the tool can be stored for long periods, preferably away from dust and dirt.

T-8004
4 Oz.



T-8032
1 Qt.



T-7712

Paint & Decal Removal Tool

The T-7712 comes with the T-771249 Rubber Eraser Wheel and the T-771257 Stripper Wheel for Paint and Rust removal.



Remove decals with no damage to underlying paint. Only light pressure needed - reduces operator fatigue. No heat damage to metal, glass, fiberglass or wood. Fast and easy, reduce labor by over 60%.

- * Use only light pressure
- * Keep the eraser level
- * Not recommended for polyethylene, lexan, acrylic, plexiglass or polypropylene
- * Wear protective eyewear
- * Start at the edges of the vinyl and work in right to left pattern.
- * Tool has 5/16-24 female threads
- * Adapter with 5/16-24 male threads and 6mm female threads is included with each tool.
- *Rear exhaust

Removes paint and rust from steel, aluminum, wood, plastic or almost any material. Unique abrasive wheel combined with the 3600 RPM speed of the T-7712 makes this a must have tool to reduce job time and operator fatigue.

RPM	3600
Length	7.75"
Height	4"
Weight	3.4 lbs.
Air Pressure	90 PSI Max.
Wheel Size	4" x 1"

RIVNUT TOOL TAPPING TOOL

Taylor

Tool comes standard with one head, either 6-32, 8-32, 10-24, 10-32, 1/4-20, 5/16-18, M3, M4, M5, M6 or M8. Additional heads available separately.



T-7767RNA350/600

Rivnut Tool

- *1/2 hp motor and double reduction gearing for exceptional power
- *Convenient forward and reverse trigger for one hand directional changes
- *Teasing Throttle for precise control
- *Quick change head for different sizes of rivnuts.

Model T-7767RNA350 is used for sizes #8-32 and M4 to 5/16-18 and M8
Model T-7767RNA600 is used for sizes #6-32 and M3 to 1/4-20 and M6



Model #	T-7767RNA350	T-7767RNA600
Length	7-3/8"	7-3/8"
Height	6"	6"
Weight	2-1/8 lbs.	2-1/8 lbs.
Air Pres.	90 PSI Max.	90 PSI Max.
RPM	350	600
Range	8-32, M4 to 5/16-18, M8	6-32, M3 to 1/4-20, M6



T-9800

M3-M12 Tapping Tool

- Tapping Capacity- Aluminum : M3 - M12
 - Steel : M3 - M8
- Free Speed 150 RPM
 Length 7.87"
 Weight 4.10 lbs.
 Air Pressure 90 PSI Max.




**Smooth, quiet and powerful
REVERSIBLE**

LIMITED LIFETIME WARRANTY

Most products of Taylor Pneumatic are warranted to be free from defects in material and workmanship for the life of the tool. This warranty applies to the original purchaser only. This warranty does not cover tools that have been abused, misused, modified, not properly lubricated or to normal wear and tear. Taylor Pneumatic will at its option repair or replace the defective product free of charge except for shipping. Taylor Pneumatics sole liability and your exclusive remedy under this warranty is limited to the repair or replacement of the defective product. There are no other warranties expressed or implied and Taylor Pneumatic shall not be liable for incidental, consequential, or special damages, expenses or costs except as described above. WARRANTY VOID IF TOOL IS DISASSEMBLED. Warranty limited to 90 days on - T-2010, T-3010, T-7007N, T-7618, T-7737R, T-7756, T-DA90, T-SP90.

WHEN OPERATING PNEUMATIC TOOLS IT IS OF THE UTMOST IMPORTANCE TO THINK SAFETY FIRST. DISCONNECT TOOLS FROM THE AIR SUPPLY WHEN CHANGING ACCESSORIES OR WHEN THE TOOL IS NOT IN USE. DIRECT EXHAUST AWAY FROM YOURSELF AND OTHERS. USE EYE PROTECTION. USE HEARING PROTECTION WHEN TOOLS ARE BEING USED FOR EXTENDED PERIODS. USE 90 PSI MAX AT THE TOOL. PUTTING A FEW DROPS OF AIR TOOL OIL IN THE TOOL AND RUNNING FOR A FEW SECONDS AT THE END OF A DAY WILL HELP PROTECT INTERNAL PARTS. FOLLOW ALL OPERATING INSTRUCTIONS AND OPERATE TOOL IN ACCORDANCE WITH THE ANSI B186.1 SAFE OPERATING CODE.

Model No.	Page	Model No.	Page	Model No.	Page	Model No.	Page	Model No.	Page	Model No.	Page	Model No.	Page	Model No.	Page	Model No.	Page	Model No.	Page								
TOOLS										ACCESSORIES																	
T-#2	63	T-7020	28	T-7730	15	T-7888AMK	48	T-9888RK	49	#23431N3	63	T-726540	22	T-7788HR-C	53	T-23434N3	63	T-726541	22	T-7788HR-KCN	53						
T-#24B	62	T-7020A	29	T-7734	6	T-7888P	20	T-9888RSPC	49	T-#23450	63	T-731529	22	T-77887BASPA	53	T-735646	69	T-735646H	69	T-77887BASPB	53	T-735646B	69	T-77887BASPC	53		
T-#24BH	62	T-7030	28	T-7734L	6	T-7891A	86	T-9890	51	T-1010	84	T-7356A1	72	T-780134	42	T-1101	64	T-7356A2	72	T-7801341	42	T-7356A2	72	T-7801342	42		
T-#3	63	T-7040A	30	T-7739	5	T-7891N	85	T-9901RN	79	T-1101W2	64	T-7356A3	72	T-7815A02	23	T-1101W2H	64	T-7356A4	72	T-7815A03	23	T-1103	64	T-7356A7	72	T-783851	96
T-#34B	62	T-7050C	30	T-7744A	5	T-7891NK	85	T-9902	92	T-1103H	64	T-7356A8	72	T-783852	96	T-1103W2	64	T-7356A9	72	T-783853	96	T-1108-18	64	T-7356A18	72	T-783853A	96
T-#34BH	62	T-7060	28	T-7744S	55	T-7892A	86	T-9913WS	32	T-1108	64	T-7356A18	72	T-783855	96	T-1108-18W2	64	T-7356A1	72	T-783855	96	T-1108-18W2	64	T-7356AT	72	T-783855	96
T-#4	63	T-7111	59	T-7745	7	T-7892N	85	T-9914	37	T-1108H-12	64	T-7356BK	69	T-783857	96	T-1108H-18	64	T-7356SK	69	T-783858	96	T-1108H-18W2	64	T-7356SK	69	T-783858	96
T-#44B	62	T-7111C	59	T-7745L	7	T-7892NK	85	T-9915	37	T-1108H-18W2	64	T-7415V	34	T-7888A	53	T-1108W2	64	T-7415VAC	34	T-7888A	53	T-1108W45	64	T-7415VAC	34	T-7888A	53
T-#44BH	62	T-7121	59	T-7749	7	T-7893N	86	T-9915N	37	T-1110W45	64	T-7416V	34	T-7888-B	53	T-1180	64	T-7416V	34	T-7888-B	53	T-1180H	64	T-7416V	34	T-7888-B	53
T-1X	58	T-7121K	60	T-7749L	7	T-8005	61	T-9915ND	37	T-1180H	64	T-7416VAC	34	T-7888-CPA	53	T-1182	64	T-7416VAC	34	T-7888-CPA	53	T-1182-18	64	T-7416VV	34	T-7888-SPB	53
T-1XS	58	T-7151	59	T-7757D	45	T-8020G	31	T-9915NG	37	T-1182-18	64	T-7416VAC	34	T-7888-SPC	53	T-1182H-18	64	T-7416VV	34	T-7888-SPC	53	T-1182H-18	64	T-7416VV	34	T-7888-SPC	53
T-2X	58	T-7151C	59	T-7757R	74	T-8600	38	T-9916	25	T-1182H	64	T-7416VV	34	T-789122HV	85	T-1182H-18	64	T-7416VV	34	T-789122HV	85	T-1182H-18	64	T-7416VV	34	T-789122HV	85
T-2XS	58	T-7182	67	T-7757REN	74	T-8600CG	38	T-9916P	25	T-1182H-18	64	T-7416VV	34	T-7922	84	T-1182H-18	64	T-7416VV	34	T-7922	84	T-1182H-18	64	T-7416VV	34	T-7922	84
T-3X	58	T-7182A	67	T-7758	75	T-8601	67	T-9920	4	T-1182H-18	64	T-7416VV	34	T-7922R	84	T-1182H-18	64	T-7416VV	34	T-7922R	84	T-1182H-18	64	T-7416VV	34	T-7922R	84
T-3XS	58	T-7211	18	T-7758KSA	80	T-8602	67	T-9930A	77	T-1182H-18	64	T-7416VV	34	T-7923	85	T-1182H-18	64	T-7416VV	34	T-7923	85	T-1182H-18	64	T-7416VV	34	T-7923	85
T-3XS	58	T-7231N	6	T-7758R	75	T-8705R	93	T-9930B	77	T-1182H-18	64	T-7416VV	34	T-7924	35	T-1182H-18	64	T-7416VV	34	T-7924	35	T-1182H-18	64	T-7416VV	34	T-7924	35
T-4X	58	T-7231NL	6	T-7758RE	75	T-8707	40	T-9930EXA	77	T-1182H-18	64	T-7416VV	34	T-8004	84	T-1182H-18	64	T-7416VV	34	T-8004	84	T-1182H-18	64	T-7416VV	34	T-8004	84
T-4XS	58	T-7265	22	T-7759	75	T-8758R	83	T-9930EXB	77	T-1182H-18	64	T-7416VV	34	T-8032	84	T-1182H-18	64	T-7416VV	34	T-8032	84	T-1182H-18	64	T-7416VV	34	T-8032	84
T-5T	61	T-7308	76	T-7759KSA	80	T-8759R	83	T-9939	5	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-5X	58	T-7311	18	T-7759KSA	80	T-8759RS	21	T-9939A	6	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-7X	58	T-7311SL	18	T-7759R	75	T-8801R	43	T-9940	41	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-9X	58	T-7311W5	18	T-7759RK3	80	T-8801REX	43	T-9940EX	41	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-2005	61	T-7315	22	T-7761	55	T-8802A	92	T-9940EXD	52	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-2420EX	54	T-7356	65	T-7761AH	55	T-8814EX	43	T-9940EXH	41	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-2430EX	54	T-7356A	65	T-7763	56	T-8815	37	T-9949	7	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-2440EX	54	T-7356K	68	T-7763EX	57	T-8816	24	T-9957RE	77	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-3000A	87	T-7356SL	65	T-7763S	56	T-8816P	24	T-9958	79	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-3000A3	87	T-7356V	65	T-7763SH	56	T-8818P	27	T-9959R	79	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-3000C	87	T-7401	73	T-7764EX	57	T-8820AH	5	T-9959REA	77	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-3000C15	87	T-7402	73	T-7765	20	T-8825/26	14	T-9963	57	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-3000C3	87	T-7445	17	T-7766	56	T-8834S	7	T-9963HR	57	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-3000CL	87	T-7445SL	17	T-7766HR	56	T-8834AH	7	T-9969G	37	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-3010	88	T-7446	17	T-7767RMA350	98	T-8839	5	T-9969R	79	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-5540K	44	T-7446SL	17	T-7767RMA600	98	T-8839A	5	T-9988HD	43	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-5540SPC	44	T-7454HPR	45	T-7768	45	T-8849	7	T-9988HRS	47	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-5550	21	T-7459R	73	T-7768HR	46	T-8849A	8	T-9988S	9	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-6000A15	87	T-7469R	73	T-7768HRK	46	T-8849L	7	T-9995N	41	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-6000A3	87	T-7511	18	T-7768R	45	T-8849P	7	T-DA90	88	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-6000C15	87	T-7553	17	T-7768RAH	45	T-8857R	82	T-SP90	88	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-6000C3	87	T-7555	17	T-7772	8	T-8857RE	81			T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-6020A	29	T-7555B	17	T-7772L	8	T-8859G	37			T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-6125	65	T-7555VAC	17	T-7773	9	T-8859HRS	20			T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-6125A	65	T-7556	17	T-7773L	9	T-8859RS	20			T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84
T-6231	6	T-7556B	17	T-7774	9	T-8859R	82			T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T-8128	84	T-1182H-18	64	T-7416VV	34	T	

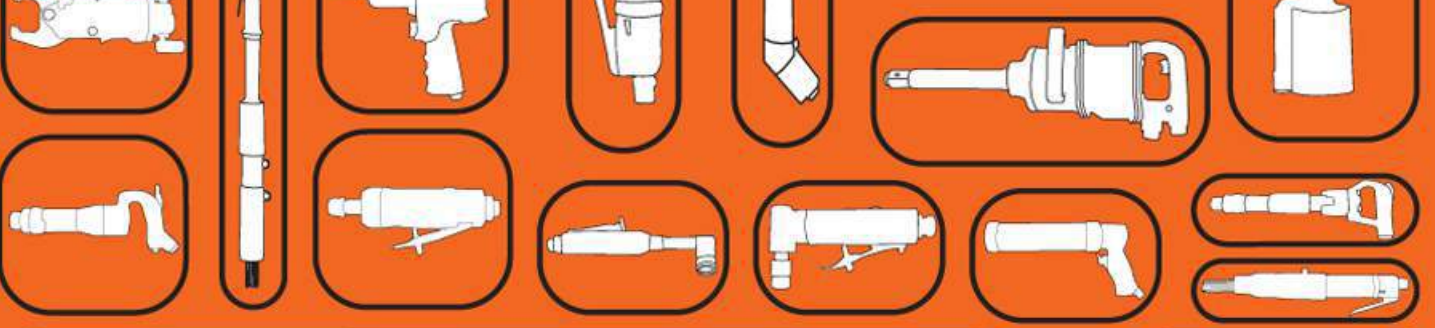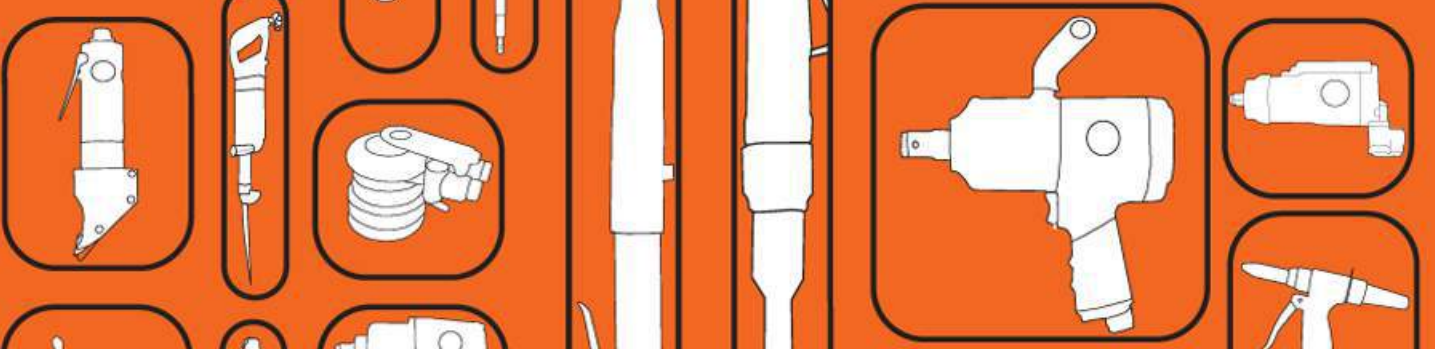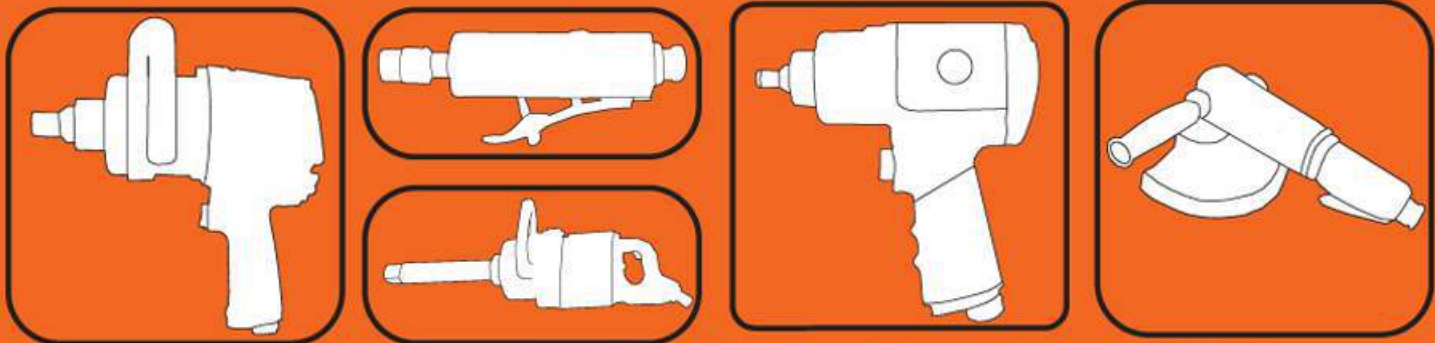

TAYLOR PNEUMATIC TOOL COMPANY

Volume 19