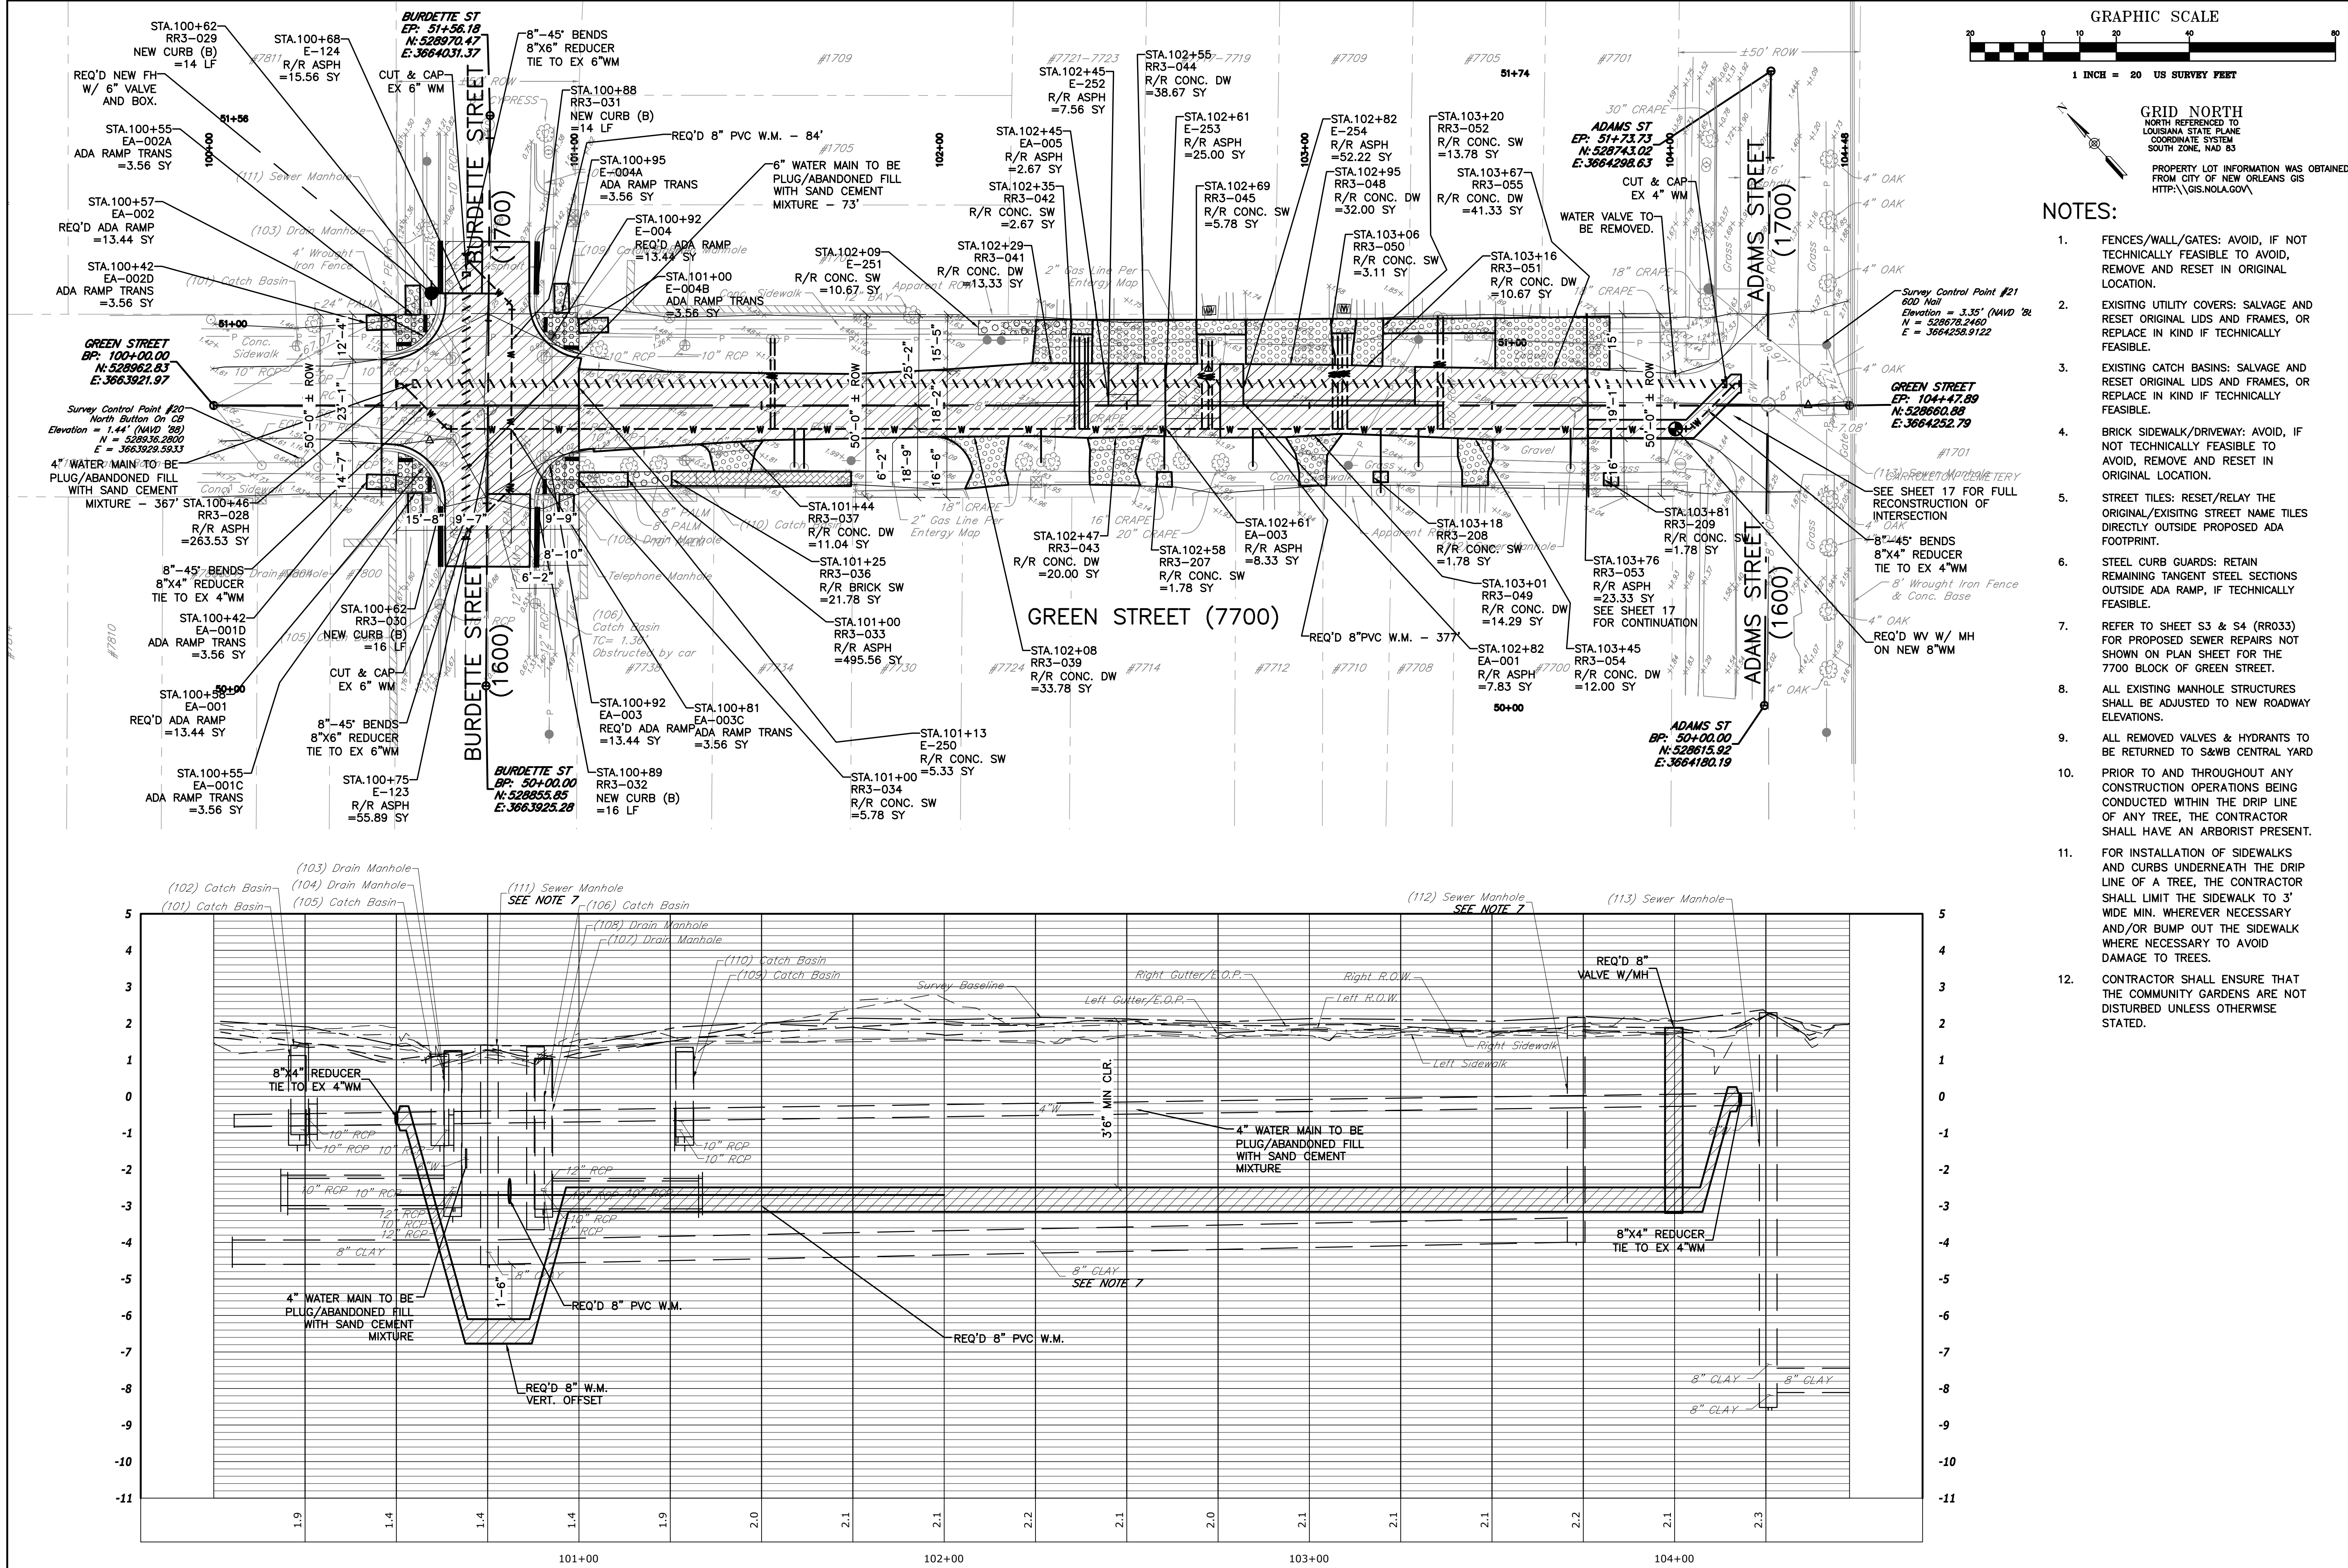


- NOTES:
- FENCES/WALL/GATES: AVOID, IF NOT TECHNICALLY FEASIBLE TO AVOID, REMOVE AND RESET IN ORIGINAL LOCATION.
 - EXISTING UTILITY COVERS: SALVAGE AND RESET ORIGINAL LIDS AND FRAMES, OR REPLACE IN KIND IF TECHNICALLY FEASIBLE.
 - EXISTING CATCH BASINS: SALVAGE AND RESET ORIGINAL LIDS AND FRAMES, OR REPLACE IN KIND IF TECHNICALLY FEASIBLE.
 - BRICK SIDEWALK/DRIVEWAY: AVOID, IF NOT TECHNICALLY FEASIBLE TO AVOID, REMOVE AND RESET IN ORIGINAL LOCATION.
 - STREET TILES: RESET/RELAY THE ORIGINAL/EXISTING STREET NAME TILES DIRECTLY OUTSIDE PROPOSED ADA FOOTPRINT.
 - STEEL CURB GUARDS: RETAIN REMAINING TANGENT STEEL SECTIONS OUTSIDE ADA RAMP, IF TECHNICALLY FEASIBLE.
 - REFER TO SHEET S3 & S4 (RR033) FOR PROPOSED SEWER REPAIRS NOT SHOWN ON PLAN SHEET FOR THE 7700 BLOCK OF GREEN STREET.
 - ALL EXISTING MANHOLE STRUCTURES SHALL BE ADJUSTED TO NEW ROADWAY ELEVATIONS.
 - ALL REMOVED VALVES & HYDRANTS TO BE RETURNED TO S&WB CENTRAL YARD.
 - PRIOR TO AND THROUGHOUT ANY CONSTRUCTION OPERATIONS BEING CONDUCTED WITHIN THE DRIP LINE OF ANY TREE, THE CONTRACTOR SHALL HAVE AN ARBORIST PRESENT.
 - FOR INSTALLATION OF SIDEWALKS AND CURBS UNDERNEATH THE DRIP LINE OF A TREE, THE CONTRACTOR SHALL LIMIT THE SIDEWALK TO 3' WIDE MIN. WHEREVER NECESSARY AND/OR BUMP OUT THE SIDEWALK WHERE NECESSARY TO AVOID DAMAGE TO TREES.
 - CONTRACTOR SHALL ENSURE THAT THE COMMUNITY GARDENS ARE NOT DISTURBED UNLESS OTHERWISE STATED.

GREEN STREET (STA: 100+00.00 TO STA: 104+47.89)
SCALE: 1"=20' HORZ. / 1"=2' VERT.

SHEET NUMBER		28 OF 127	
BY			
NO.		DATE	
REVISION		DESCRIPTION	
BCG ENGINEERING & CONSULTING 3012 26TH STREET, METAIRIE, LA 70002			
DESIGNED	BCG	SCALE	AS SHOWN
CHECKED	BCG	DATE	7/18/2022
DETAILED	BCG	SHEET	RR033 GREEN
CITY OF NEW ORLEANS, DEPARTMENT OF PUBLIC WORKS PROJECT NO. RR-216			
RR216 - EAST CARROLLTON GROUP B & C			
PLAN & PROFILE SHEET - GREEN PP 01			