

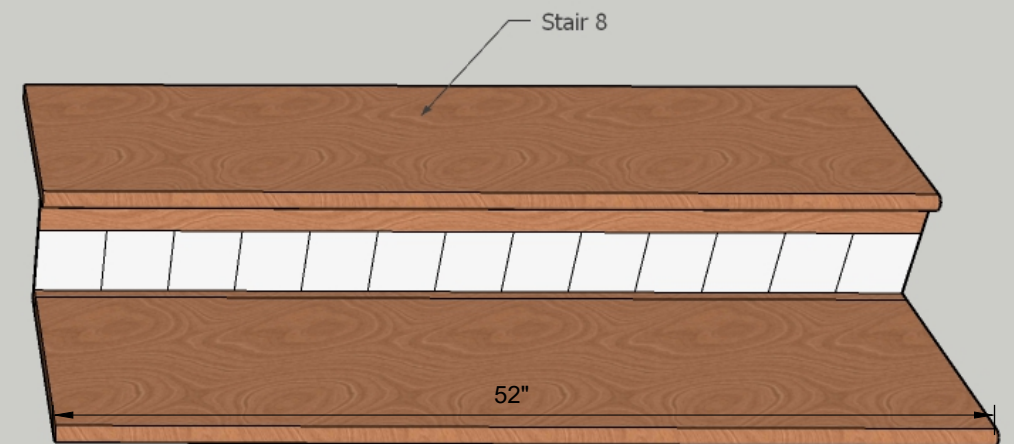
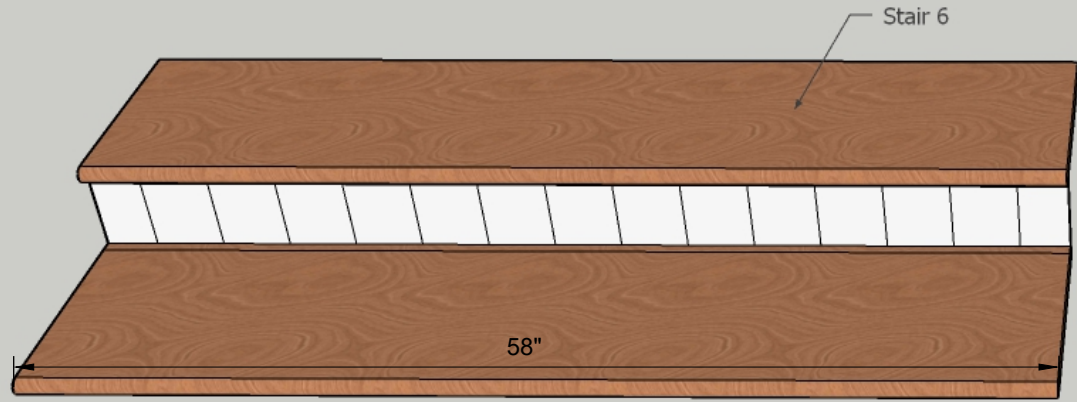


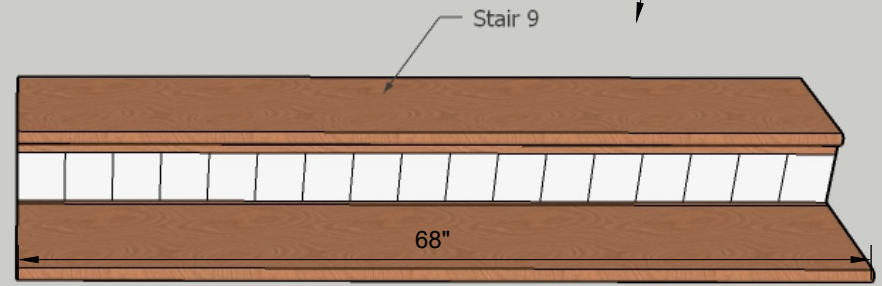

LOBBY  
Stairs 7 and 7A - 10 Total Risers.  
110 each 4" Tiles, or 440 each 2" Tiles.

DINING HALL  
Stair 9 - 5 Total Risers.  
85 each 4" Tiles, or 340 each 2" Tiles.

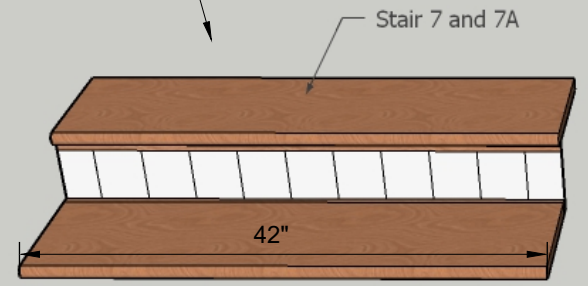

GAME ROOM  
Stair 6 - 5 Total Risers.  
75 each 4" Tiles, or 300 each 2" Tiles.

CORRIDOR 1st to 2nd FLOOR  
Stair 8 - 15 Total Risers.  
195 each 4" Tiles, or 780 2" Tiles.





Bees Industries  
6145 Broadway, Suite 48  
Denver, CO 80216  
1-800-716-7307

CLIENT  
Fashion Flooring  
7581 W 103rd Ave  
Westminster, CO 80021

PROJECT  
Olin Hotel Apartments  
PROJECT NO.  
01-21-001

ISSUE  
02-10-2021  
DRAWN BY  
Bryce Perkins

**OLIN HOTEL  
STAIRS**

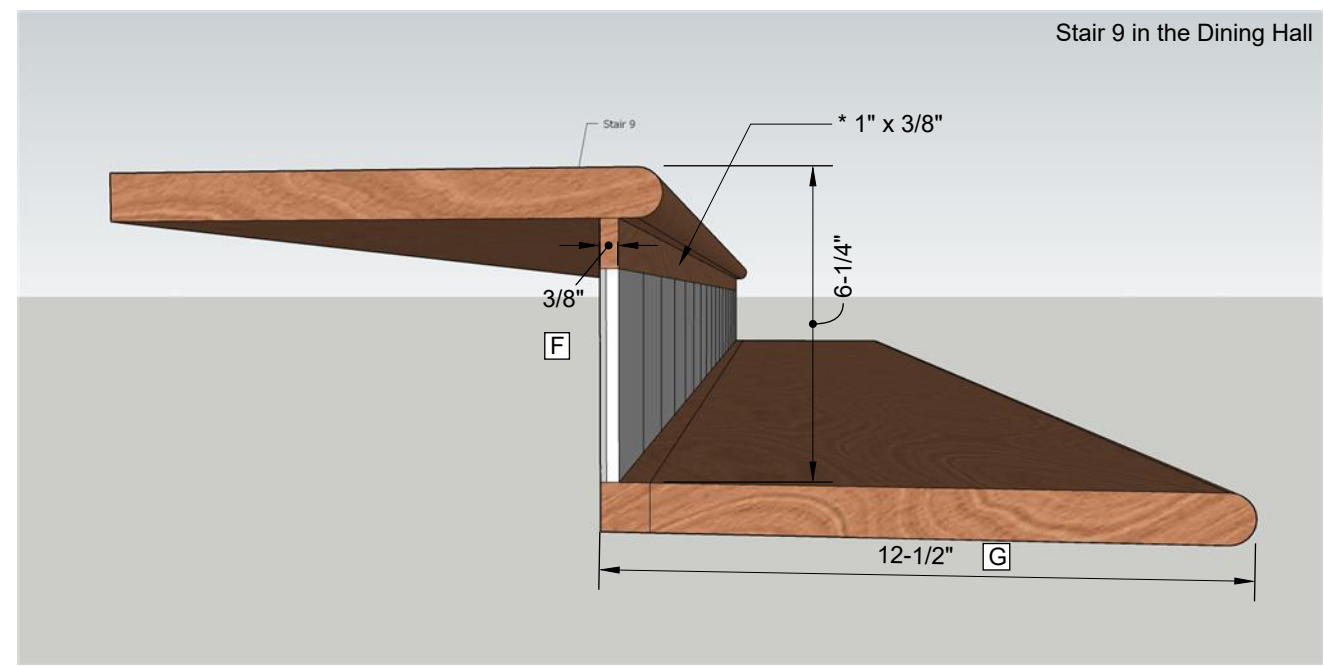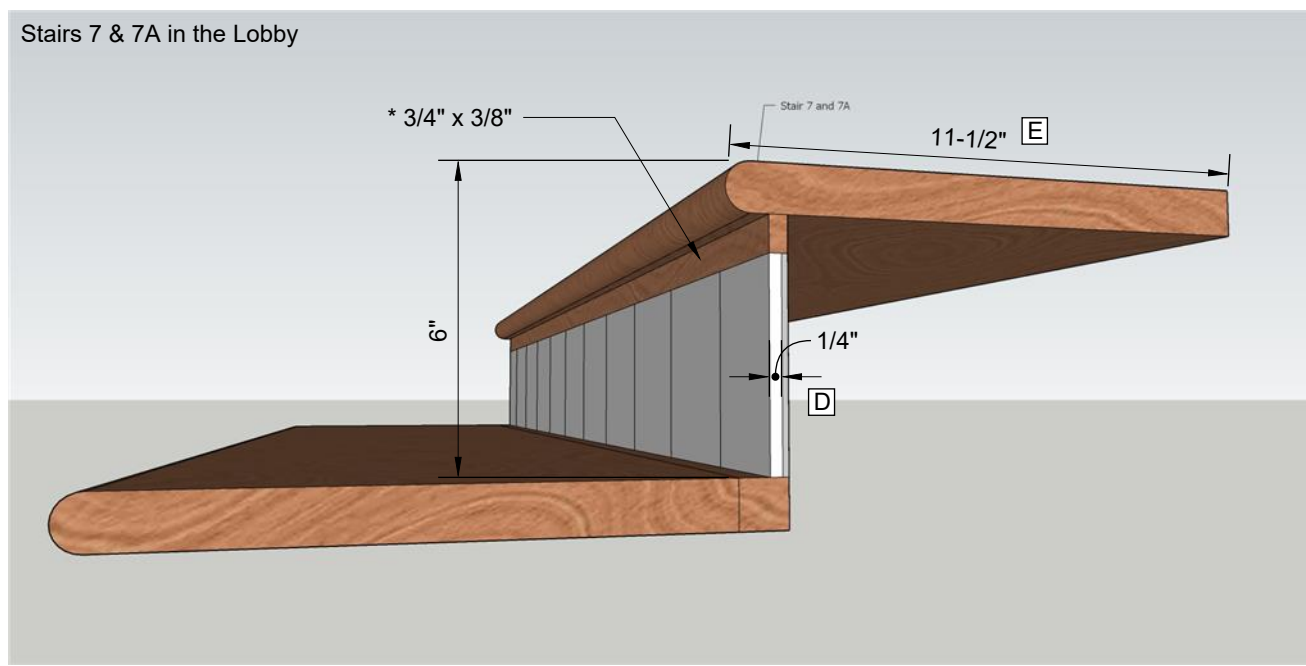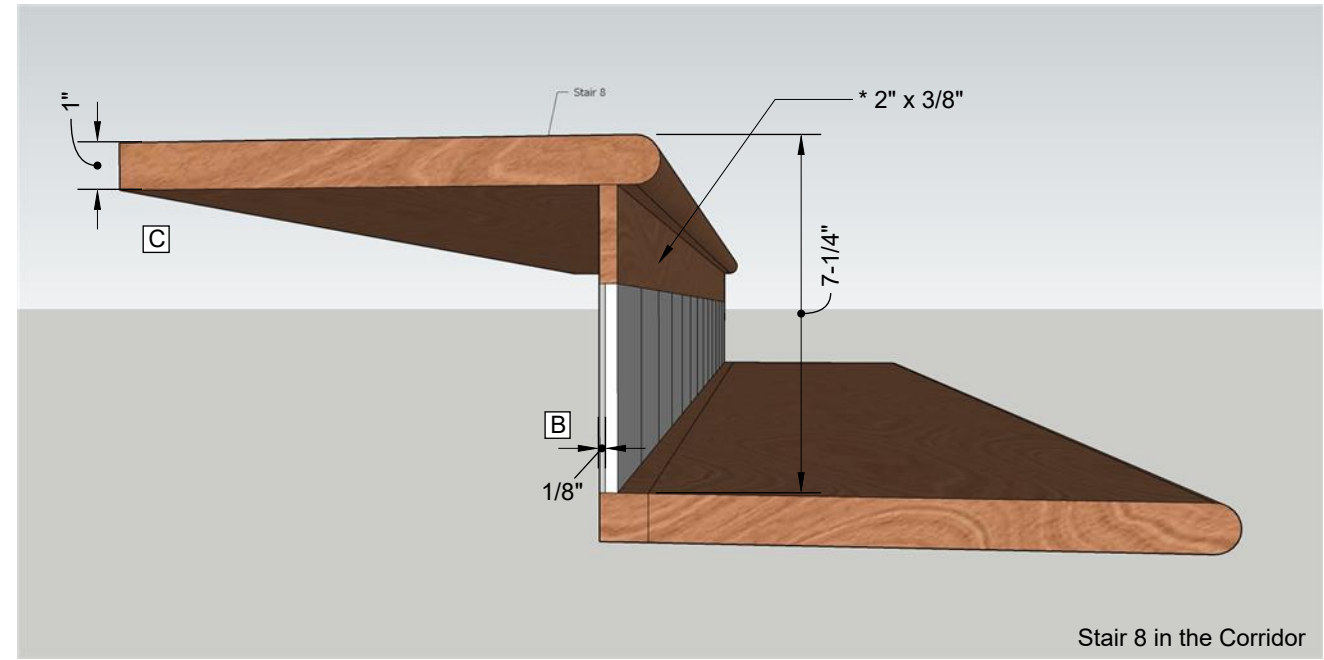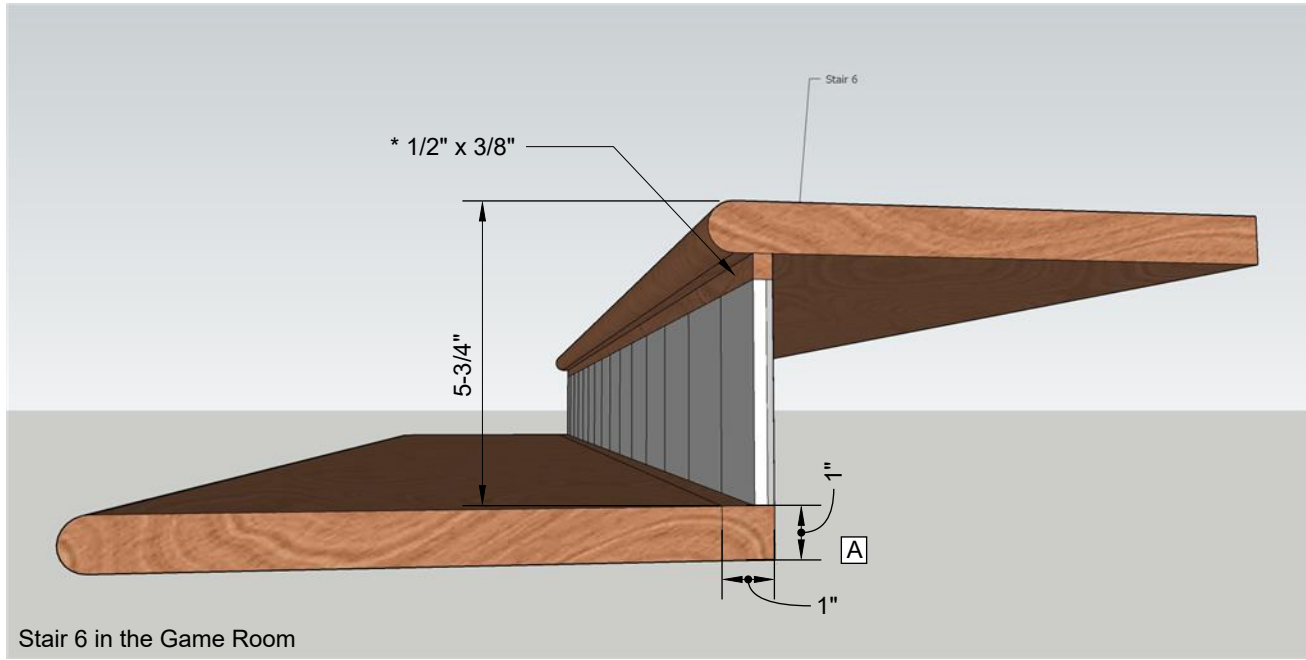

- A. 1" x 1" piece of white oak to fill gap behind each tread stained to match - 100 LF total.
- B. 1/8" mastic mortar bed adhesive for tile.
- C. 1" actual thickness of white oak treads.
- D. 1/4" thickness of riser tiles, 4-1/4" and 2" square.
- E. 11-1/2" actual depth of white oak treads.
- F. 3/8" min 1/2" max width of white oak trim above riser tiles.
- G. 12-1/2" actual depth of sub-treads already in place.

\* 100 LF of 2" white oak trim to go above riser tiles. Minimum width 3/8", maximum width 1/2" to maintain code variance. Rip cut to fit in place above tile and below bullnose of every riser, installing flush to sub-riser. Stain in place to match.