


**BINTANG DELAPAN TERMINAL
PORT INFO**

Location : Desa Fatufia, Kecamatan Bahoodopi Sulawesi Tengah
Lat / Long : 02⁰ 48.56 S, 122⁰ 09.47 E
Pilot Meeting Point : 02⁰ 47.9 S, 122⁰ 09.6 E
Pilot VHF Channel : 12
Pilot Time : 24 hour (Depend on Weather permission).
Anchorage Area : Will be piloting to get good position.

Jetty Lay Out:

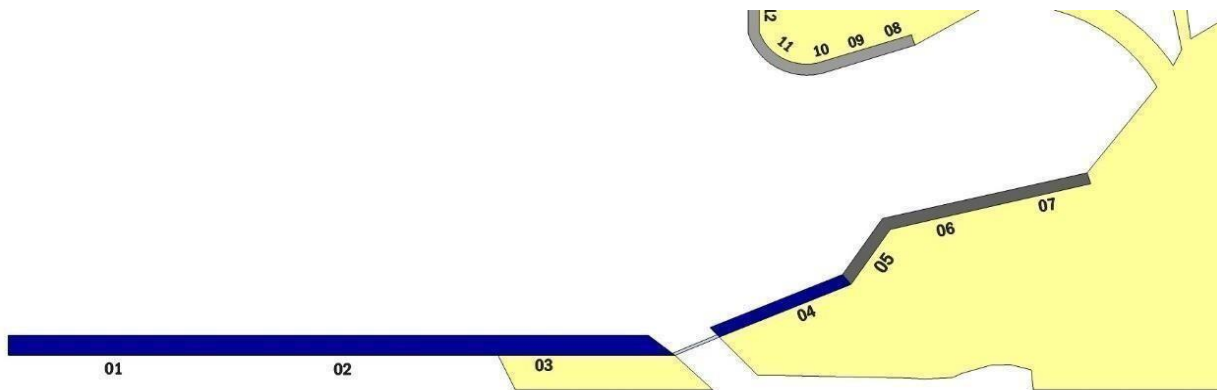

1. **Jetty 1, 2 and 3** with Total Length 500 meters and max draft 16 meters. Facility : -. 5 units Portal Crane with travelling rail
 - . 3 units Gantry Crane with SWL 45 T
 - . Coal Hopper and Belt Conveyor
 - . Height of Crane : 38 Meter
 - . Max Lifting Height : 28 meter
 - . Out Reach : 33 meter
 - . Hopper and conveyor available at jetty 2 and 3

This jetty is normally for discharging COAL, Chrome and Iron Ore in Bulk.

2. **Jetty 4** with total Length 200 meters and Max Draft 9.8 meter Facility : -. 3 Units Portal Crane with travelling rail
 - . Travelling distance 180 meter
 - . Height of Crane: 39 meter
 - . Max Lifting Height : 28 meter
 - . Out Reach : 33 meter

This Jetty is normally for discharging General Cargo, and other steel Product.

3. Jetty 5 with total Length 80 meters and Max Draft 8.0 Meter Facility :

- 2 units of Gantry Crane with travelling Rail
- Coal Hopper
- Height of Crane 77 meter
- Max Lifting Height : 25 meter
- Out Reach : 30 Meter

This jetty is normally for discharging transshipment cargo COAL and local Cargoes.

4. Jetty 6, 7 up to 22 with max draft less than 6 meters. All jetties are used for discharging Nickel Ore using Barge.

Bintang Delapan Terminal Facilities:

1. Assist Tug for berthing : 2 Units with 3000 HP each
2. Pilot Speed : 1 unit
3. Mooring Gangs
4. Fresh Water Supply : Only for Daily consumption **not for Drinking.**
5. No Fuel Bunkering

Discharging Rate:

1. Bagged Cargoes : 6000 MT / day SHINC
2. Bulk Cargoes : 13000 MT – 30000 MT/Day SHINC (Coal, Chrome, Lime Stone)
3. General Cargoes : 3000 MT / day SHINC (Equipment and Heavy Lift)

Loading Rate:

1. Nickel Pig Iron: 10000 mt / day SHINC
2. Steel Product in Slab and Rolled : 10000 mt / day SHINC

Terminal Working hour is 24 hours in a day, Saturday, Sunday and Public Holiday is working. Except : Moslem Holiday and Chines Holiday will be advised.

Special Note:

1. All cargoes are going to this terminal should be handled by PT. IMIP their own stevedoring company, **No** other stevedoring company is allow to enter the Terminals.
2. Make sure shipping term on cargo handling is correct, to avoid mishandling on the discharging/loading port (Bintang Delapan Terminal).