



[Click HERE to return to the Table of Contents](#)

**MAXIMUM CARTRIDGE / MINIMUM CHAMBER**

**12-GAUGE - 2 3/4"**

**CARTRIDGE**

UNLESS OTHERWISE NOTED  
 LENGTH TOL -.250 (6.35)

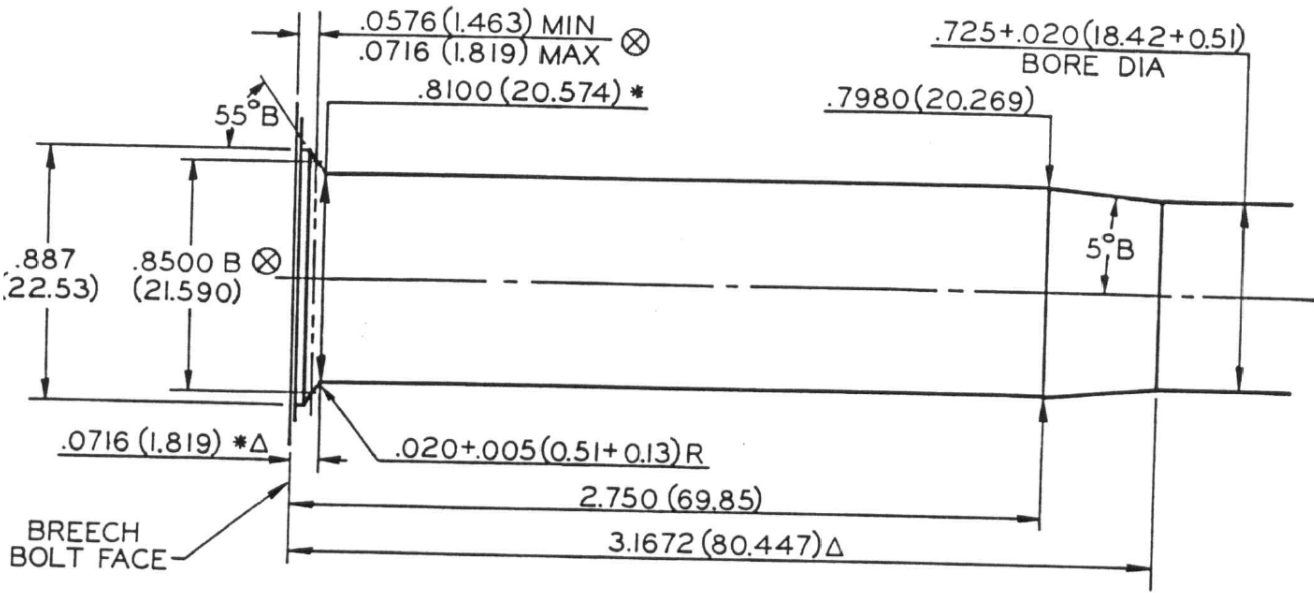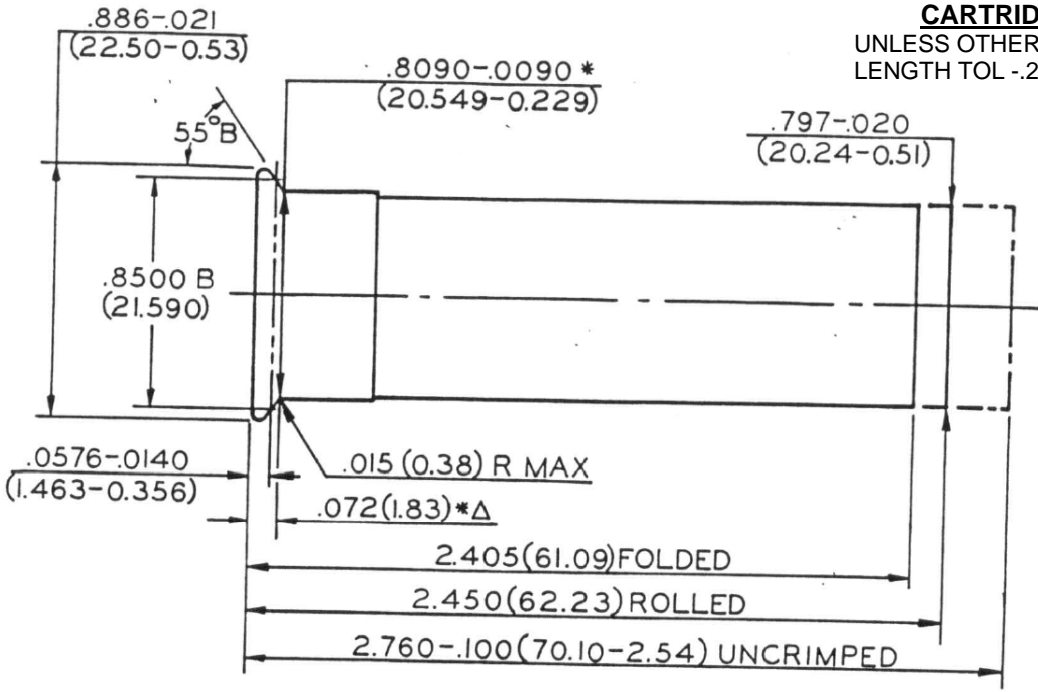

**NOTE**

B = BASIC  
 (XX.XX) = MILLIMETERS      ⊗ = HEADSPACE DIMENSION  
 \* DIMENSIONS ARE TO INTERSECTION OF LINES      Δ = REFERENCE DIMENSION  
 ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

CHAMBER LENGTHS HAVE BEEN INCREASED. FORMER CHAMBER DIMENSIONS ARE ALSO CONSIDERED TO REPRESENT SAFE PRACTICE.

**CHAMBER**  
 UNLESS OTHERWISE NOTED  
 ALL DIA +.005 (0.13)  
 LENGTH TOL +.050 (1.27)