



[Click HERE to return to the Table of Contents](#)

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

28-GAUGE - 2³/₄"

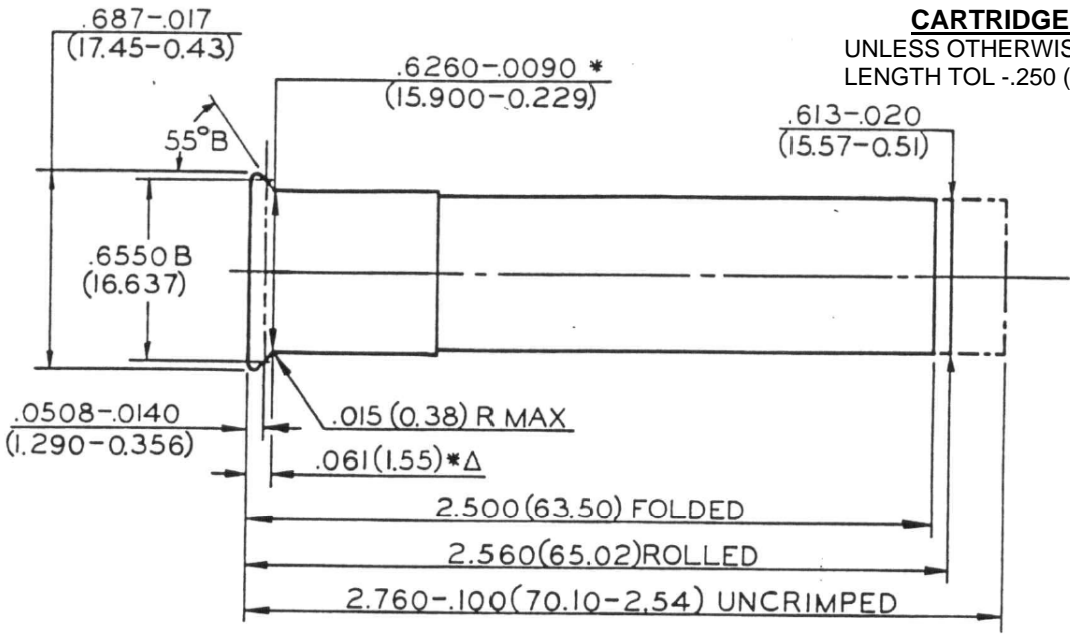

CARTRIDGE
UNLESS OTHERWISE NOTED
LENGTH TOL -.250 (6.35)

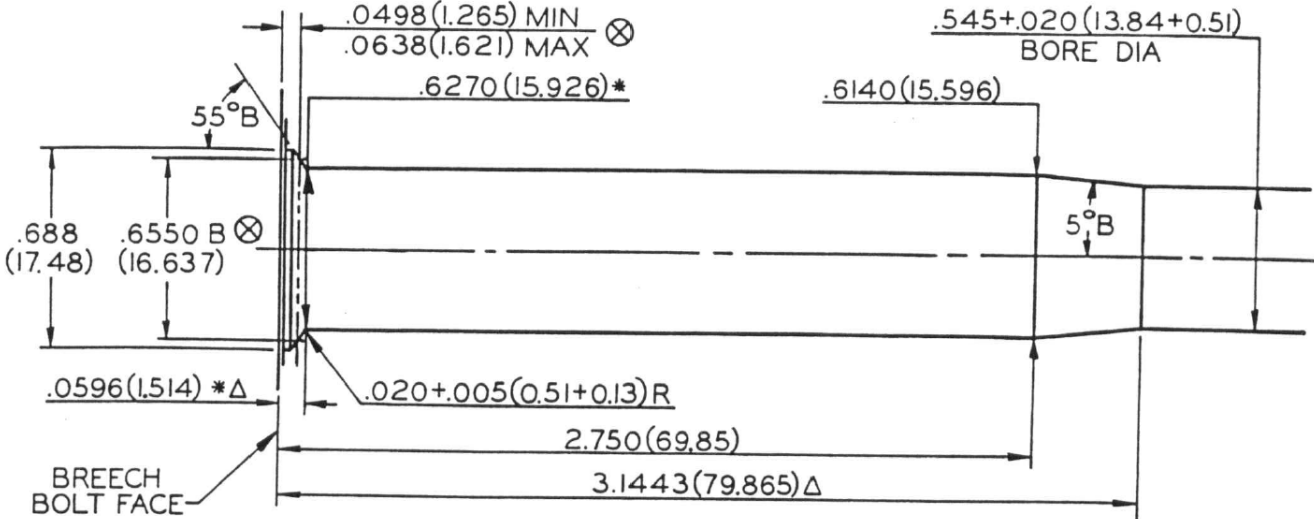

CHAMBER LENGTHS HAVE BEEN INCREASED. FORMER CHAMBER DIMENSIONS ARE ALSO CONSIDERED TO REPRESENT SAFE PRACTICE.

CHAMBER
UNLESS OTHERWISE NOTED
ALL DIA +.005 (0.13)
LENGTH TOL +.050 (1.27)

NOTE
B = BASIC
(XX.XX) = MILLIMETERS ⊗ = HEADSPACE DIMENSION
* DIMENSIONS ARE TO INTERSECTION OF LINES Δ = REFERENCE DIMENSION
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)