



Click [HERE](#) to return to the Table of Contents

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

44-40 WINCHESTER

CARTRIDGE

UNLESS OTHERWISE NOTED
BODY DIA -.008 (0.20)

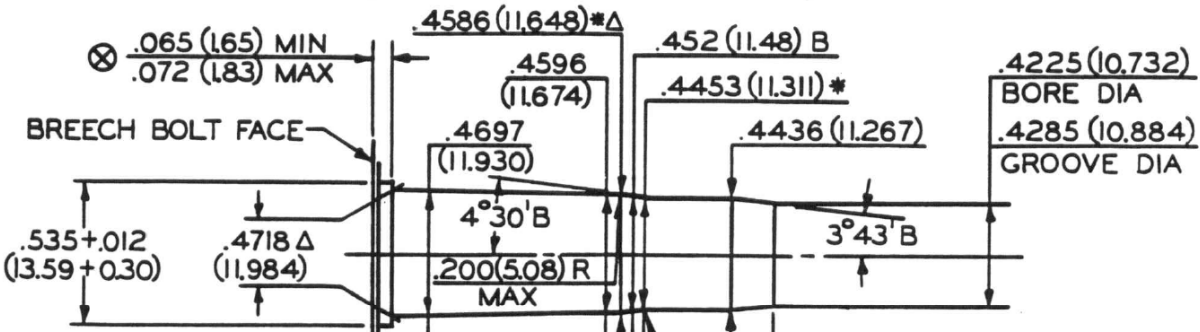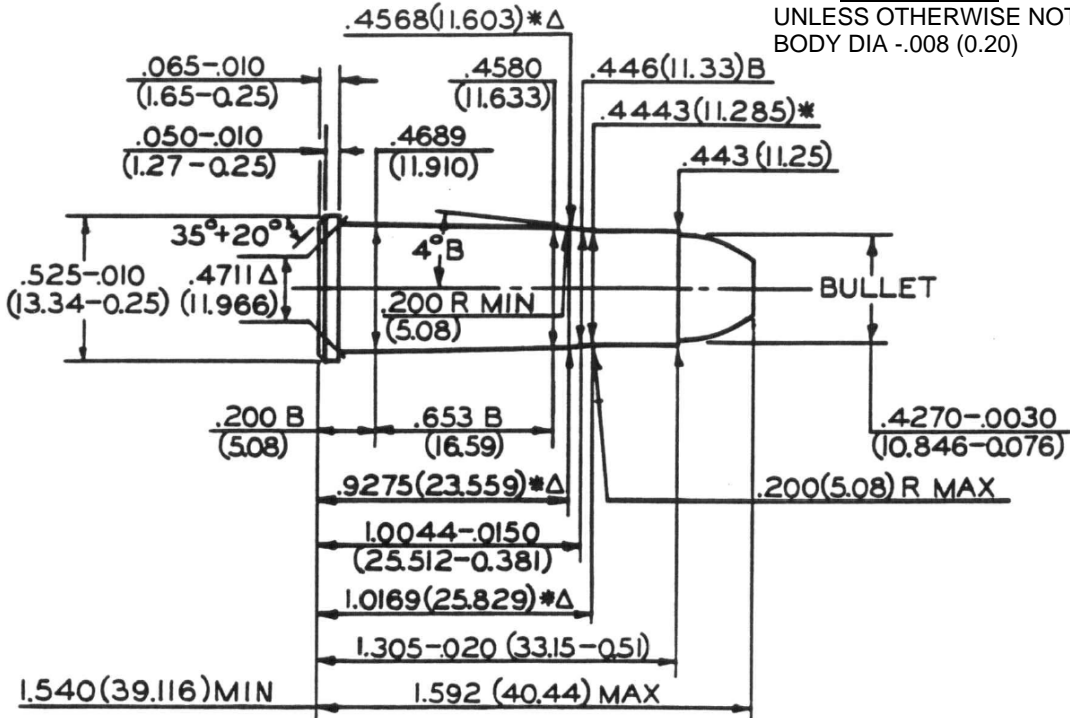

Δ 6 GROOVES
Δ .1327±.0020(3.371+0.051) WIDE
TWIST 36(914.4) RH-OPTIONAL
MIN BORE & GROOVE AREA
.1426 SQ. IN. (91.999 mm²)

CHAMBER

UNLESS OTHERWISE NOTED
ALL DIA +.002 (0.05)
LENGTH TOL +.015 (0.38)

NOTE
B = BASIC
(XX.XX) = MILLIMETERS
⊗ = HEADSPACE DIMENSION
Δ = REFERENCE DIMENSION
* DIMENSIONS ARE TO INTERSECTION OF LINES
ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)