
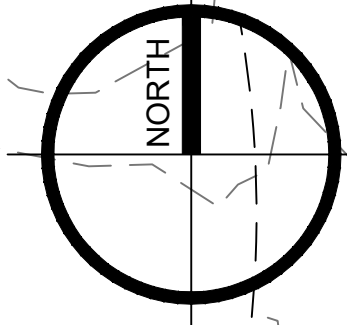


Project Title:	Addendum No:
Negotkuk Kciw Knicanewek Sports and Recreation Park – Phase 2	01 – REV.1
Project Location:	Project Number:
Tobique First Nation, NB	9223-18-00
Consultant's Name:	Date:
EVOQ Architecture	September 07, 2021
<p>This Addendum is issued prior to Bid due date to revise the Bid/Contract Documents and as such is part of those documents; value of all items shall be included in Bid.</p> <p>After acceptance of Bid, claims for costs will not be considered by reason of failure by Bidder to have read the Addenda.</p>	
Drawings:	
<p>The revised plan attached to this addendum takes precedence over the plans of the same name found in the original tender package as well as in Addendum 01:</p> <p>LANDSCAPE DRAWING SET</p> <hr/> <p>L-7 Butternut Treatment Plan</p>	

END OF ADDENDUM

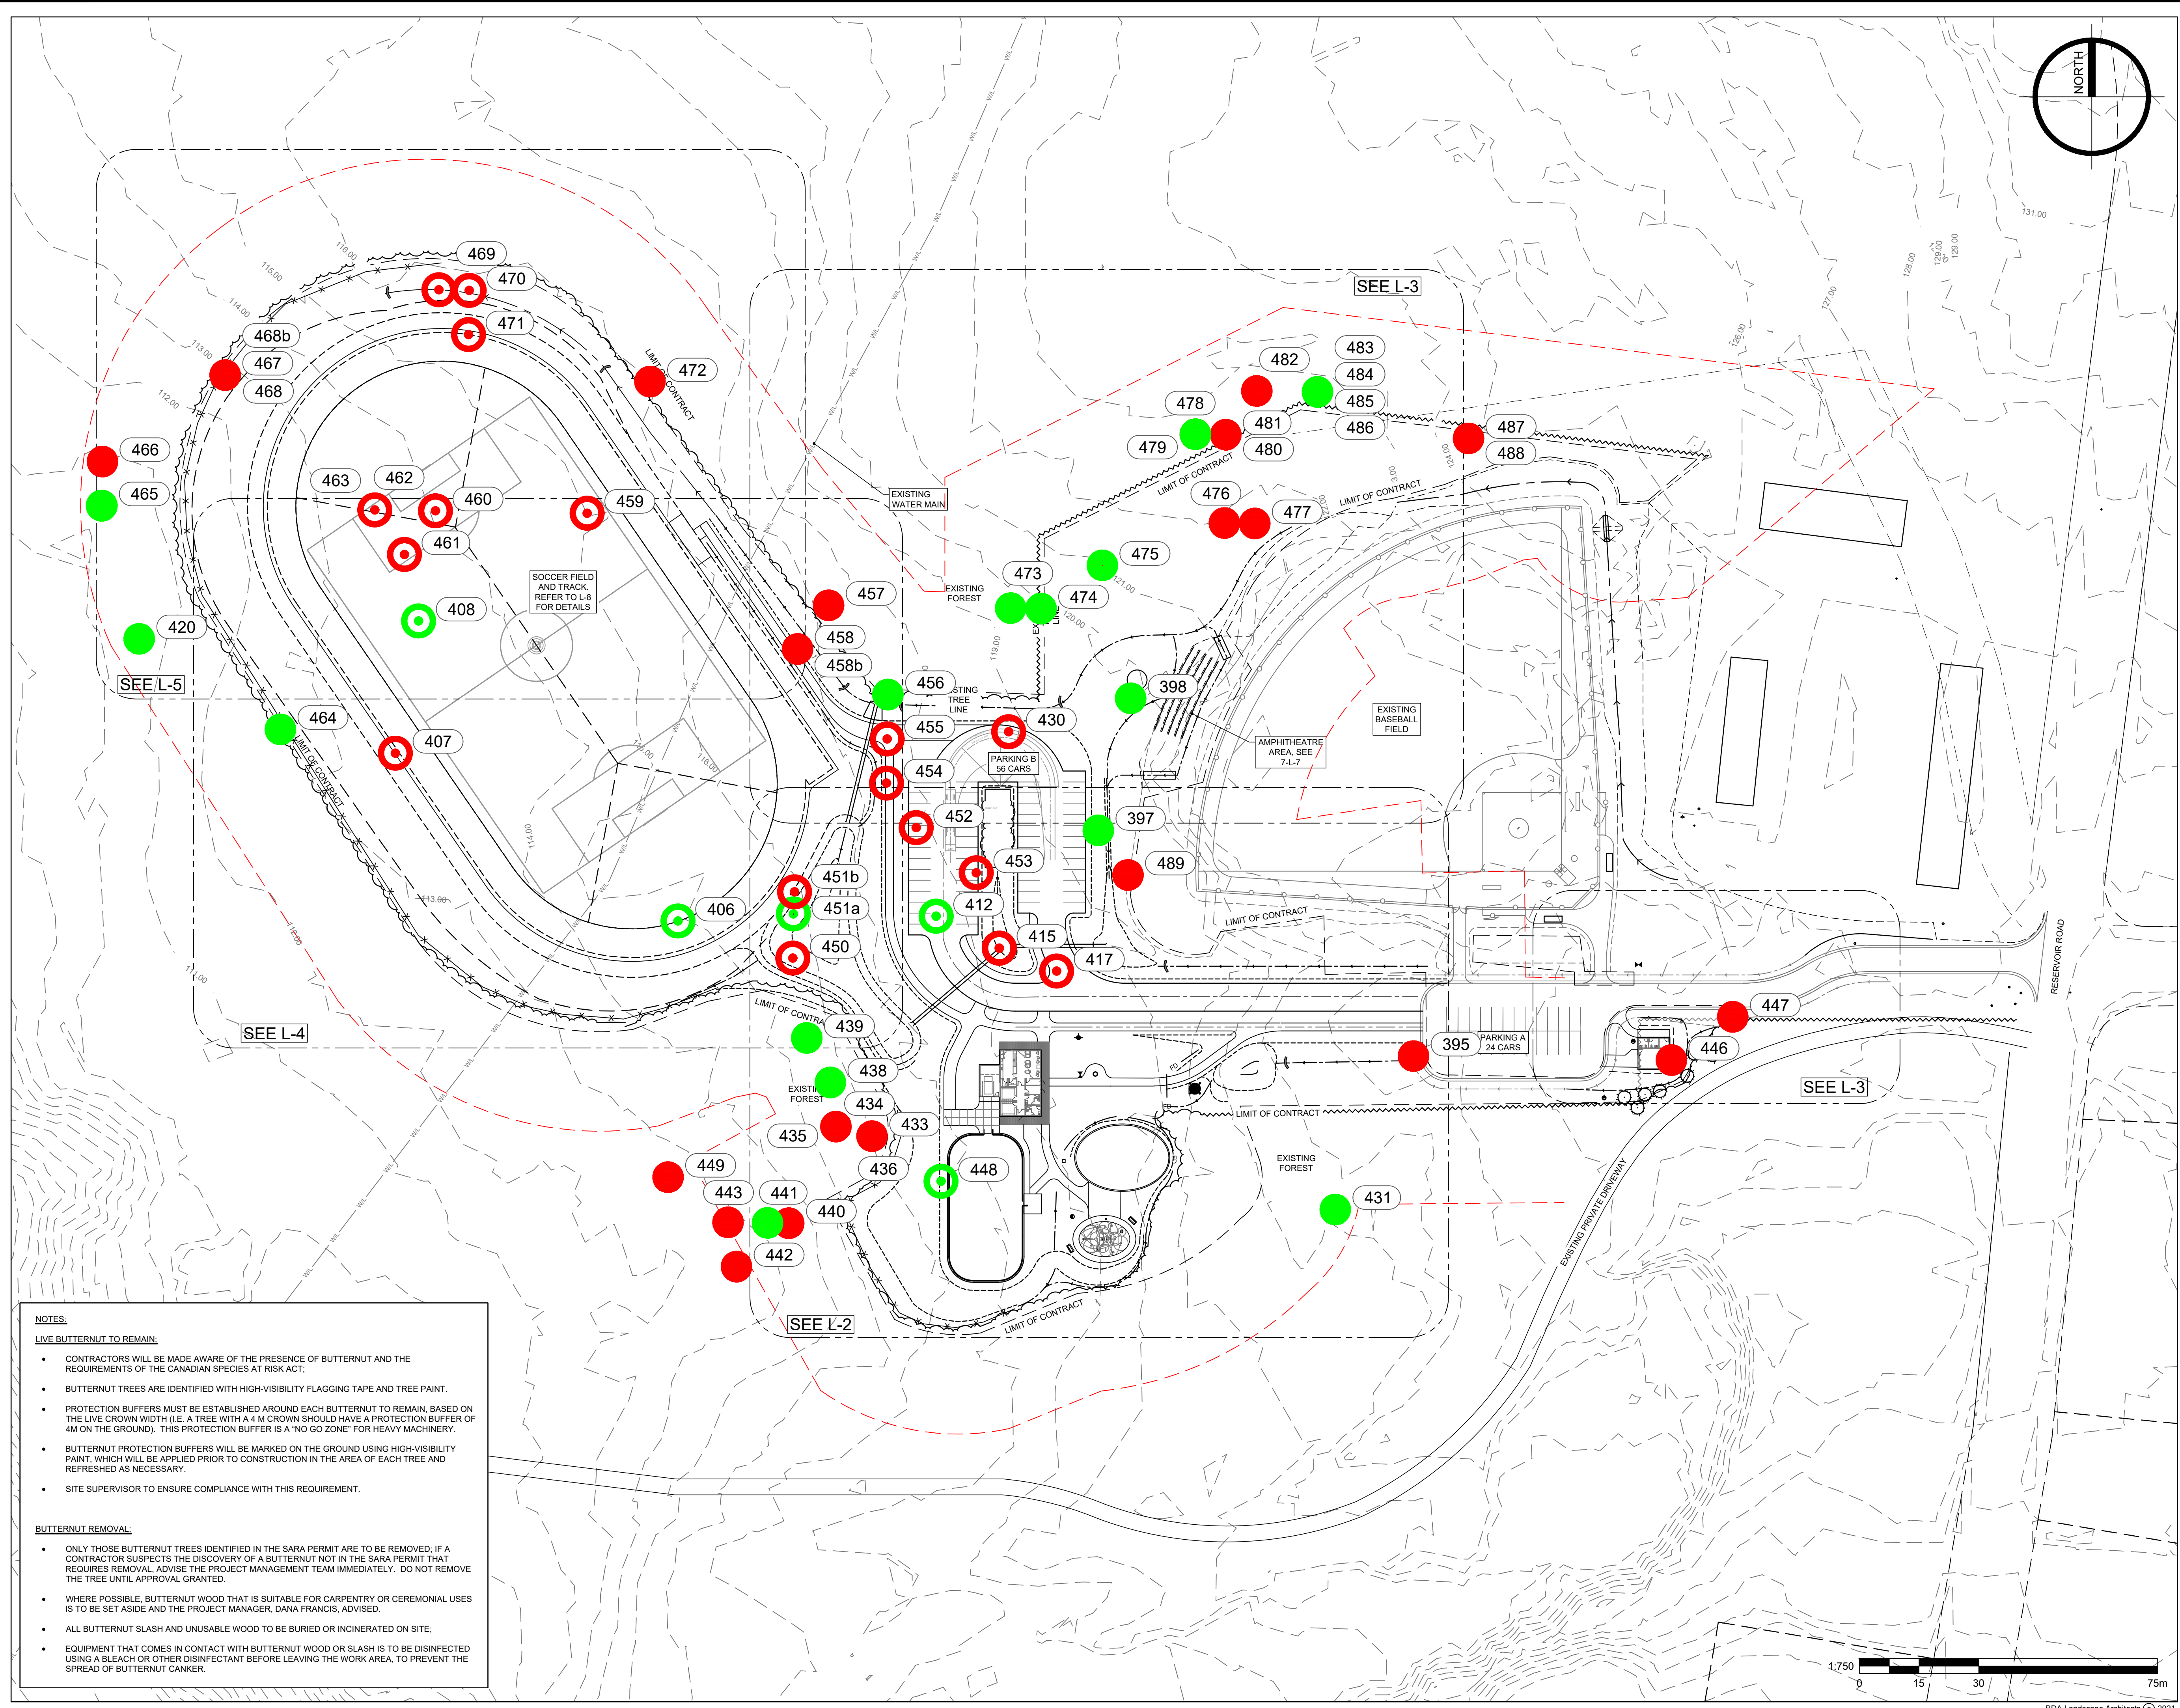

CLIENT

- NOTES**
- EXISTING CONTOURS OBTAINED FROM GEONB AND USED IN GOOD FAITH.
 - EXISTING SURVEY GRADES OBTAINED FROM SURVEYOR AND USED IN GOOD FAITH.
 - ENSURE POSITIVE DRAINAGE ON ALL SURFACES.
 - THE CONTRACTOR IS REQUIRED TO VERIFY ALL DIMENSIONS, GRADES, AND INVERTS SHOWN, AND THEIR RELATIONSHIP TO EXISTING SITE CONDITIONS. THE CONTRACTOR IS TO REPORT ANY DISCREPANCIES TO THE ARCHITECT FOR REVISION PRIOR TO COMMENCING WORK ON SITE.
 - ALL DISTURBED AREAS OUTSIDE LIMITS OF CONTRACT, TO BE REINSTATED TO ORIGINAL CONDITION, OR BETTER, AT CONTRACTOR'S EXPENSE.
 - THE CONTRACTOR IS REQUIRED TO COMPLETE ALL LOCATES FOR UNDERGROUND SERVICES AND/OR UTILITIES PRIOR TO COMMENCING WORK ON SITE.
 - TOPSOIL DEPTH FOR SEEDED AREAS TO BE 150mm AFTER ROLLING.
 - CONTRACTOR IS TO PROTECT EXISTING INFRASTRUCTURE TO REMAIN, AND PREVENT SEDIMENT FROM ENTERING STORM SEWER SYSTEM. INSTALL SILT SACS IN ALL CATCH BASINS (NEW AND EXISTING).
 - NUMBERS CORRESPOND TO GPS WAY POINTS.

± 00.00	EXISTING GRADES		NEW DECIDUOUS TREE
30.10	PROPOSED GRADES		NEW CONIFEROUS TREE
00.00	EXISTING CONTOURS		TOPSOIL AND HYDROSEED
	CULVERT		HYDROSEED ONLY
	SLOPE ARROW		TAILINGS TRAIL
	SWALE		CONCRETE
	TREE CLEARING LIMITS		PICNIC TABLE
	LIMIT OF CONTRACT		BENCH
	SEDIMENT CONTROL FENCE		CHECK DAM
	DRAINAGE PIPING		PICNIC SHELTER
	HEALTHY BUTTERNUT TREES		UNHEALTHY BUTTERNUT TREES
	HEALTHY BUTTERNUT TREES TO BE REMOVED		UNHEALTHY BUTTERNUT TREES TO BE REMOVED
	25m BUFFER AROUND LIMIT OF CONTRACT		

NO.	DATE	REVISIONS
A	SEPT 01/21	100% REVIEW

CONSULTANT

416, rue York Street
bureau/Suite 200
Fredericton (NB) E3B 3P7
T. / 506.472.9838
F. / 506.548.2207

PROJECT TITLE

**KCIW KNICANEWEK
SPORTS AND RECREATION PARK**

TOBIQUE FIRST NATION, NB

DRAWING TITLE

BUTTERNUT TREATMENT

STAMP	DATE	DRAWN
	SEPT 2021	PB
	SCALE	CHECKED
	1:750	JB
JOB NO.		3201
SHEET NO.		L-7

- NOTES:**
- LIVE BUTTERNUT TO REMAIN:**
- CONTRACTORS WILL BE MADE AWARE OF THE PRESENCE OF BUTTERNUT AND THE REQUIREMENTS OF THE CANADIAN SPECIES AT RISK ACT.
 - BUTTERNUT TREES ARE IDENTIFIED WITH HIGH-VISIBILITY FLAGGING TAPE AND TREE PAINT.
 - PROTECTION BUFFERS MUST BE ESTABLISHED AROUND EACH BUTTERNUT TO REMAIN, BASED ON THE LIVE CROWN WIDTH (I.E. A TREE WITH A 4 M CROWN SHOULD HAVE A PROTECTION BUFFER OF 4M ON THE GROUND). THIS PROTECTION BUFFER IS A "NO GO ZONE" FOR HEAVY MACHINERY.
 - BUTTERNUT PROTECTION BUFFERS WILL BE MARKED ON THE GROUND USING HIGH-VISIBILITY PAINT, WHICH WILL BE APPLIED PRIOR TO CONSTRUCTION IN THE AREA OF EACH TREE AND REFRESHED AS NECESSARY.
 - SITE SUPERVISOR TO ENSURE COMPLIANCE WITH THIS REQUIREMENT.
- BUTTERNUT REMOVAL:**
- ONLY THOSE BUTTERNUT TREES IDENTIFIED IN THE SARA PERMIT ARE TO BE REMOVED; IF A CONTRACTOR SUSPECTS THE DISCOVERY OF A BUTTERNUT NOT IN THE SARA PERMIT THAT REQUIRES REMOVAL, ADVISE THE PROJECT MANAGEMENT TEAM IMMEDIATELY. DO NOT REMOVE THE TREE UNTIL APPROVAL GRANTED.
 - WHERE POSSIBLE, BUTTERNUT WOOD THAT IS SUITABLE FOR CARPENTRY OR CEREMONIAL USES IS TO BE SET ASIDE AND THE PROJECT MANAGER, DANA FRANCIS, ADVISED.
 - ALL BUTTERNUT SLASH AND UNUSABLE WOOD TO BE BURIED OR INCINERATED ON SITE.
 - EQUIPMENT THAT COMES IN CONTACT WITH BUTTERNUT WOOD OR SLASH IS TO BE DISINFECTED USING A BLEACH OR OTHER DISINFECTANT BEFORE LEAVING THE WORK AREA, TO PREVENT THE SPREAD OF BUTTERNUT CANKER.

