

Click [HERE](#) to return to the Table of Contents

S A A M I[®]

SPORTING ARMS AND AMMUNITION MANUFACTURERS' INSTITUTE, INC.


Since 1926

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

45 COLT

CARTRIDGE

UNLESS OTHERWISE NOTED
BODY DIA -.006 (0.15)

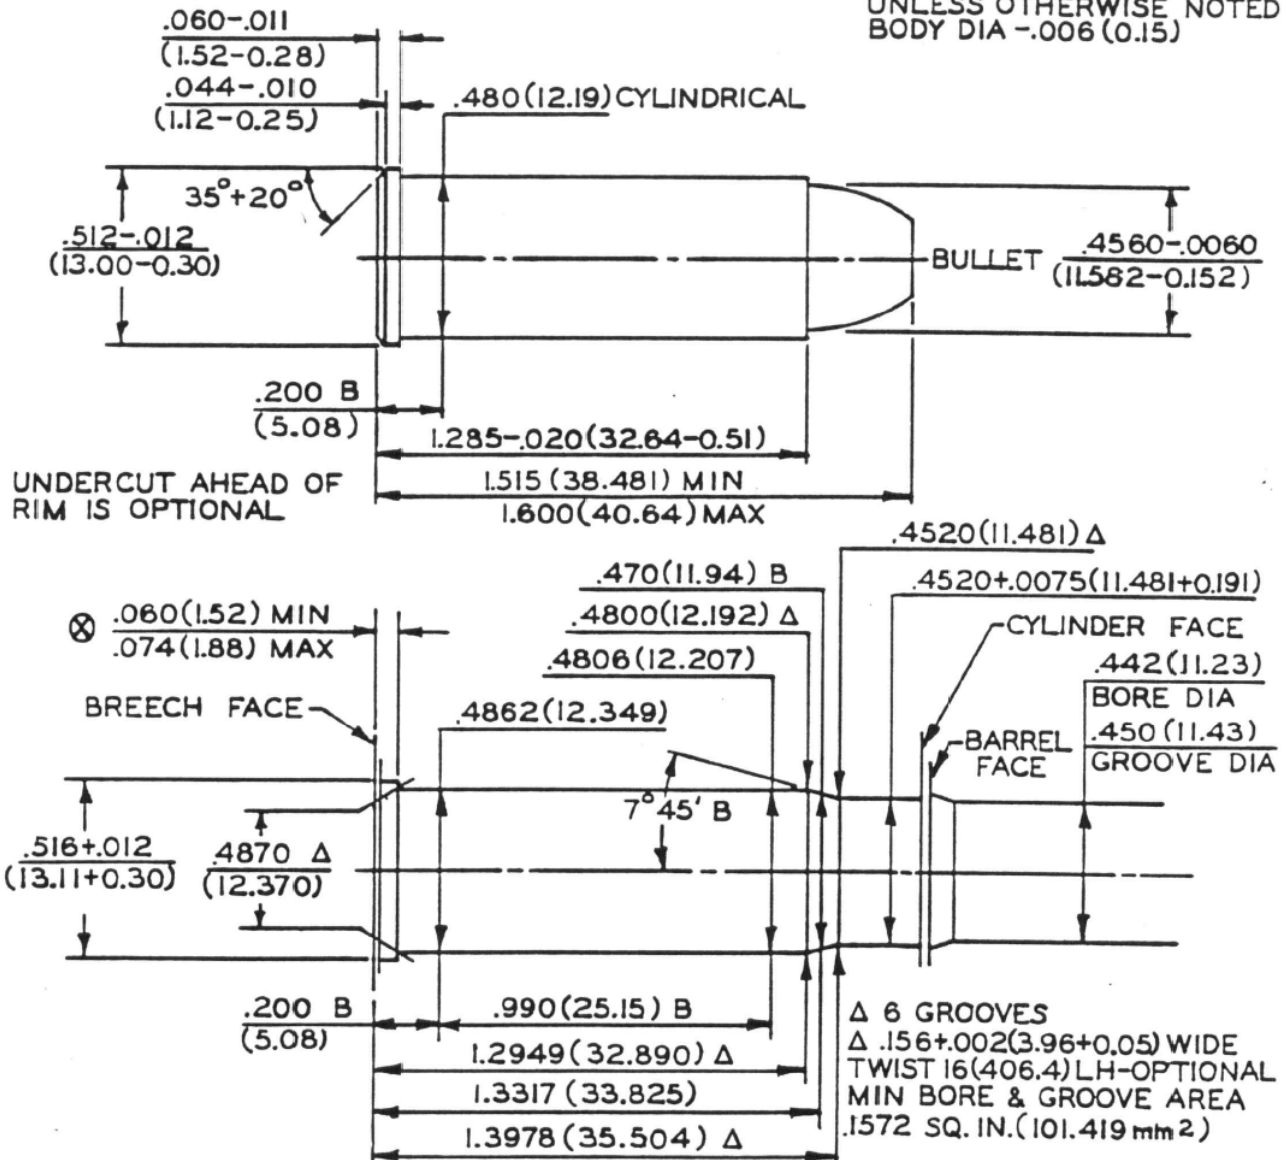

NOT ALL MANUFACTURERS
USE A RECESS IN THE
CYLINDER

NOTE
B = BASIC
(XX.XX) = MILLIMETERS
⊗ = HEADSPACE DIMENSION
Δ = REFERENCE DIMENSION
* DIMENSIONS ARE TO INTERSECTION OF LINES
ALL CALCULATIONS APPLY AT MAXIMUM
MATERIAL CONDITION (MMC)

CHAMBER

UNLESS OTHERWISE NOTED
ALL DIA. +.004 (0.10)
LENGTH TOL +.015 (0.38)