

\*\*\* BILL OF MATERIAL \*\*\*

PT NO.	CATALOG NO.	QTY	DESCRIPTION
1	PATCASELI	1	CASE, TOOL PATRIOT LITHIUM-ION
2	BAT18VLI	2	BATTERY, LITHIUM ION 18V
3	PATCHGRLI	1	CHARGER, BATTERY LITHIUM ION
4	BATCHGRLIOMI	1	BATTERY CHARGER SAFETY OPERATING MAINTENANCE & INSTRUCTIONS
5	PT208620	1	LANYARD
6	PAT46LWSLIOMI	1	SOMI, PAT46LWSLI
7	PT2044380I	1	FIVE YEAR WARRANTY CARD
8	LIMSDS	1	MSDS, LITIUM ION BATTERY

CATALOG NUMBER	DESCRIPTION	CHARGER CATALOG NO.
PAT46LWSLI	PATRIOT® PAT46LWSLI WITH 120V CHARGER	PATCHGRLI
PAT46LWSLIDC	PATRIOT® PAT46LWSLI WITH 12V CHARGER	PATCHGRLIDC
PAT46LWSLILCB	PATRIOT® PAT46LWSLI LESS CHARGER AND BATTERY	--
PAT46CLWSLI	PATRIOT® PAT46CLWSLI (COVERED HEAD) WITH 120V CHARGER	PATCHGRLI
PAT46CLWSLILCB	PATRIOT® PAT46CLWSLI LESS CHARGER AND BATTERY	--

## PATRIOT®

BATTERY ACTUATED TOOL - HYDRAULIC SELF CONTAINED - 15 TON OUTPUT FORCE


### SPECIFICATIONS

CRIMP FORCE: 15 TONS (13.6 METRIC TONS)  
 TOOL WEIGHT: 18.9 LBS (8.6 kg)  
 LENGTH: 18.44 IN (46.84 cm)  
 WIDTH: 3.26 IN (8.28 cm)  
 HEIGHT: 12.88 IN (32.72 cm)  
 OPERATING VOLTAGE: 18V-DC  
 RECHARGE TIME: 30 MINUTES

### FEATURES AND BENEFITS

- REFINED HYDRAULIC SYSTEM FOR SUPERIOR PERFORMANCE, SPEED AND RELIABILITY.
- FIELD PROVEN ELECTRONICS FOR ULTIMATE RELIABILITY IN THE HARSHTEST ENVIRONMENTS.
- OVERMOLDED HANDLE FOR COMFORT AND IMPROVED GRIP; ALLOWS FOR ONE-HANDED OPERATION FOR ADVANCE, RETRACT AND HOLD.
- 18 VOLT LITIUM-ION BATTERIES PROVIDE 2.5 TIMES MORE CHARGE / DISCHARGE CYCLES THAN TRADITIONAL Ni-Cd BATTERIES AND PROVIDE 430% MORE LIFETIME WORK.
- 30 MINUTE CHARGER CONTROLS CURRENT, VOLTAGE AND TEMPERATURE TO MAXIMIZE BATTERY LIFE. FORCED AIR COOLING FAN COOLS THE BATTERY BY FORCING COOL AIR THROUGH THE BATTERY'S BUILT-IN AIR VENTS.
- STATE OF THE ART "C" HEAD DESIGN, 355° ROTATION LETS THE USER GET INTO TIGHT AREAS EASIER.
- ALLOWS USE OF STANDARD BURNDY® DIES ALREADY IN USE.
- DURABLE HIGH IMPACT FORMED CARRYING CASE PROVIDES SUPERIOR PROTECTION AND STORES ALL ACCESSORIES.
- 5 YEAR LIMITED WARRANTY ON THE TOOL, 3 YEAR LIMITED WARRANTY ON THE BATTERIES AND CHARGER.
- LIFETIME WARRANTY ON INFINITY DRIVE®.

REV.	DATE	DESCRIPTION	ECO	BY	C'H'K.
J	2018-09-10 00:00:00 EDT	UPDATED AS PER MARKUP	49811	RS	RM

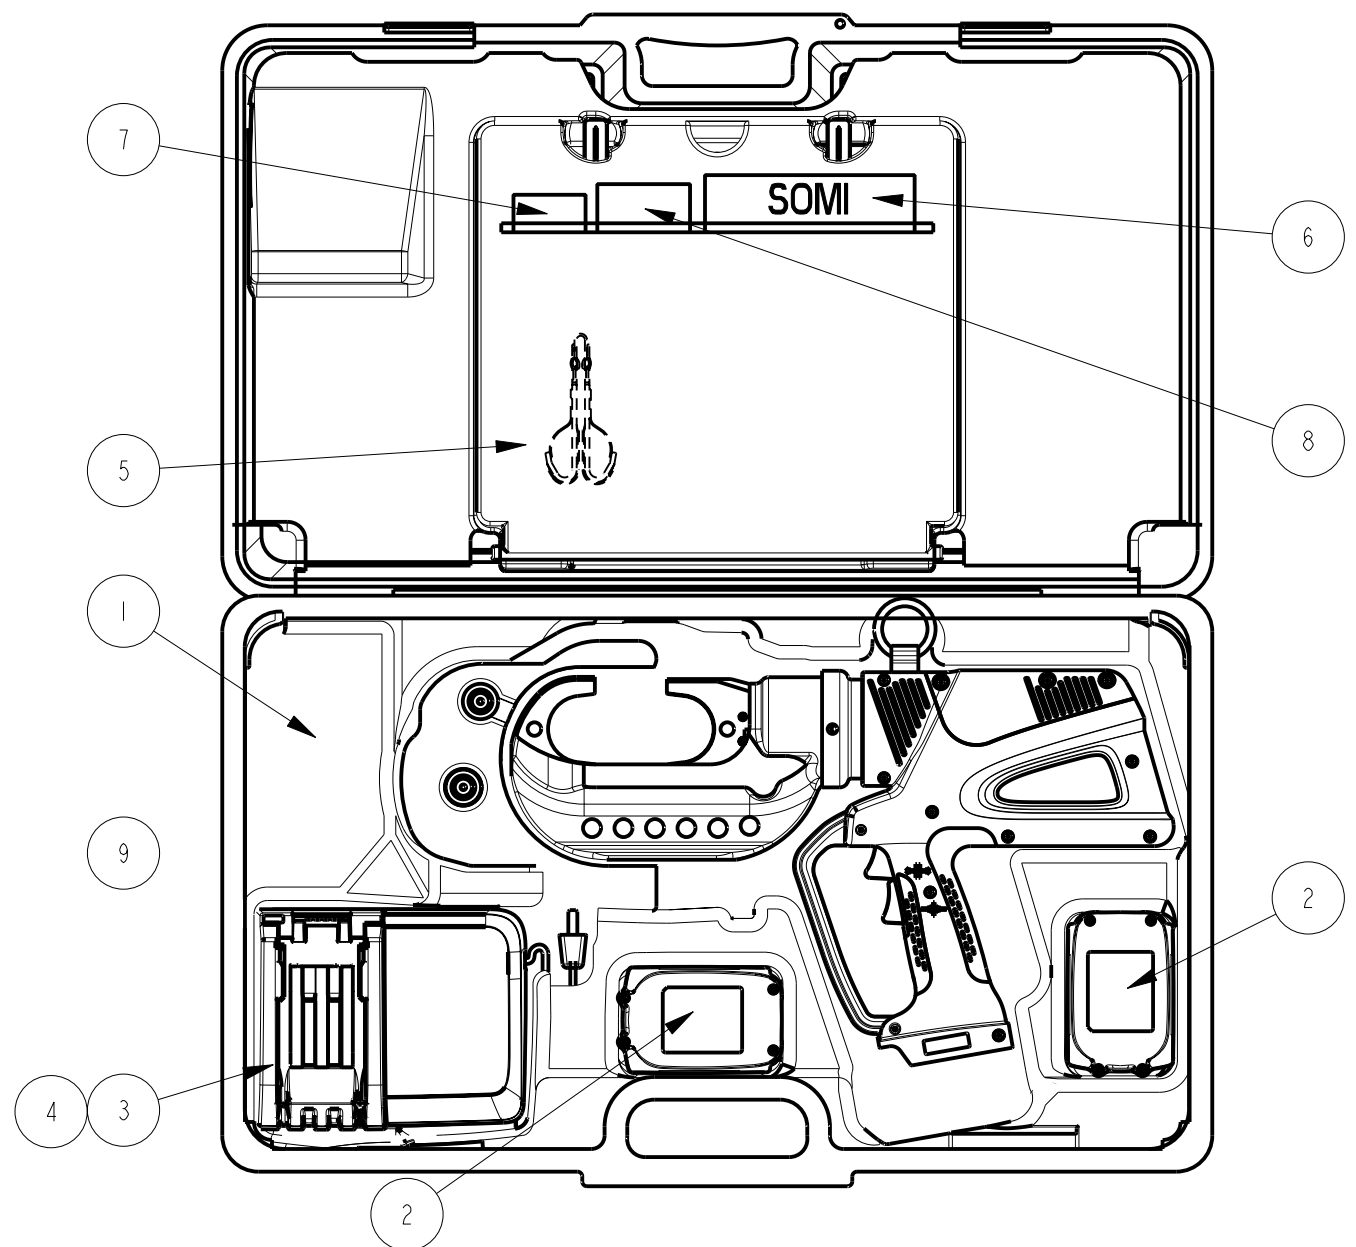

### NOTES:

1. TOOL ACCEPTS 18V MAKITA LITHIUM ION BATTERIES, BL SERIES OF SIZE 2.0 AHR AND GREATER IF THE PLASTIC BATTERY CLIP IN THE TOOL HAS A "STAR" MOLDED INTO IT. THE "STAR" IDENTIFIES ACCEPTANCE OF THE BL SERIES BATTERIES.
2. FOR TOOLS WHICH DO NOT HAVE A "STAR" MOLDED INTO THE PLASTIC BATTERY CLIP, USE IS LIMITED TO THE BL 1830 (3.0 AHR) BATTERY. FORCING ANY OTHER BATTERY INTO THIS TOOL WILL VOID THE WARRANTY.



REV: PE0200

TO ORDER BURNDY® PRODUCTS CALL		PATRIOT® PAT46LWSLI	
UNITED STATES: 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: 50024799	CAT. NO: DRAWASMS
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		DRAWN BY: T. FAUCHER 05/27/2014	CHECKER: M. CHIASSON 05/27/2014
FOR PRODUCT INFO: <a href="http://www.burndy.com">http://www.burndy.com</a>		DSN APPVL: M. CHIASSON 06/06/2014	MFG APPVL: S. GONYAW 06/06/2014
		QA APPVL: C. LINDQUIST 06/06/2014	MKT APPVL: M. RZASA 06/06/2014
		SCALE: 1:4	DRAWING NO
		PROJECT #: --	50024801
		DOCUMENT TYPE: Sales	J
		REL LEVEL: Released	SHEET 1 OF 1