




### OPTIK Flood


- Adapatable LED flood designed and built for Australian conditions
- Engineered optic enables dedicated symetric or asymmetric throw
- Quality Nichia SMD LED L70-TM21 projection 50,000h, 45C ambient
- Terminal hard wiring or pre-wire flex options
- Adjustable trunion provides over and under-sling installation options
- Imperviant coating system for long term durability - IP65
- Terminal enclosure and gear compartment access via robust 316 Stainless hasp

MODEL	WATTS	Mass (kg)	COLOUR TEMPERATURE	Lumens	Optics
OPK100	100	3.3	2700K	13000	
			3000K		
OPK150	150	3.3	4000K	19500	
			5000K		
OPK200	200	7.0		26000	
OPK240	240	7.0		31200	


### Geometry




100W / 150W



200 / 240W

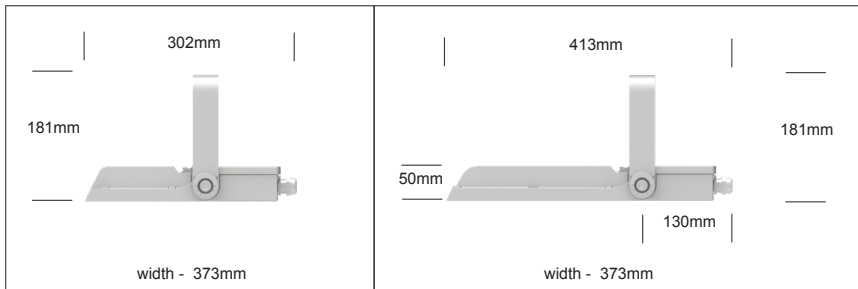

### Optics

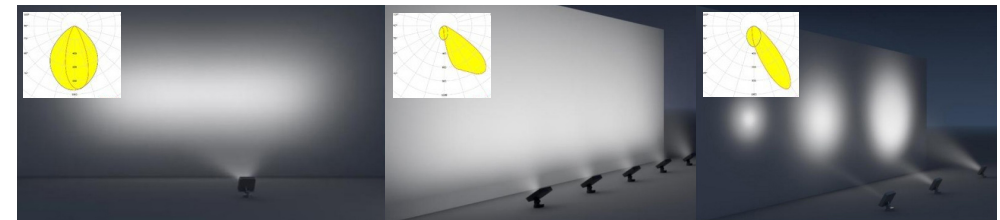

Wide symmetric or asymmetric

Wall wash

Symmetric narrow