


## Model 52BWT

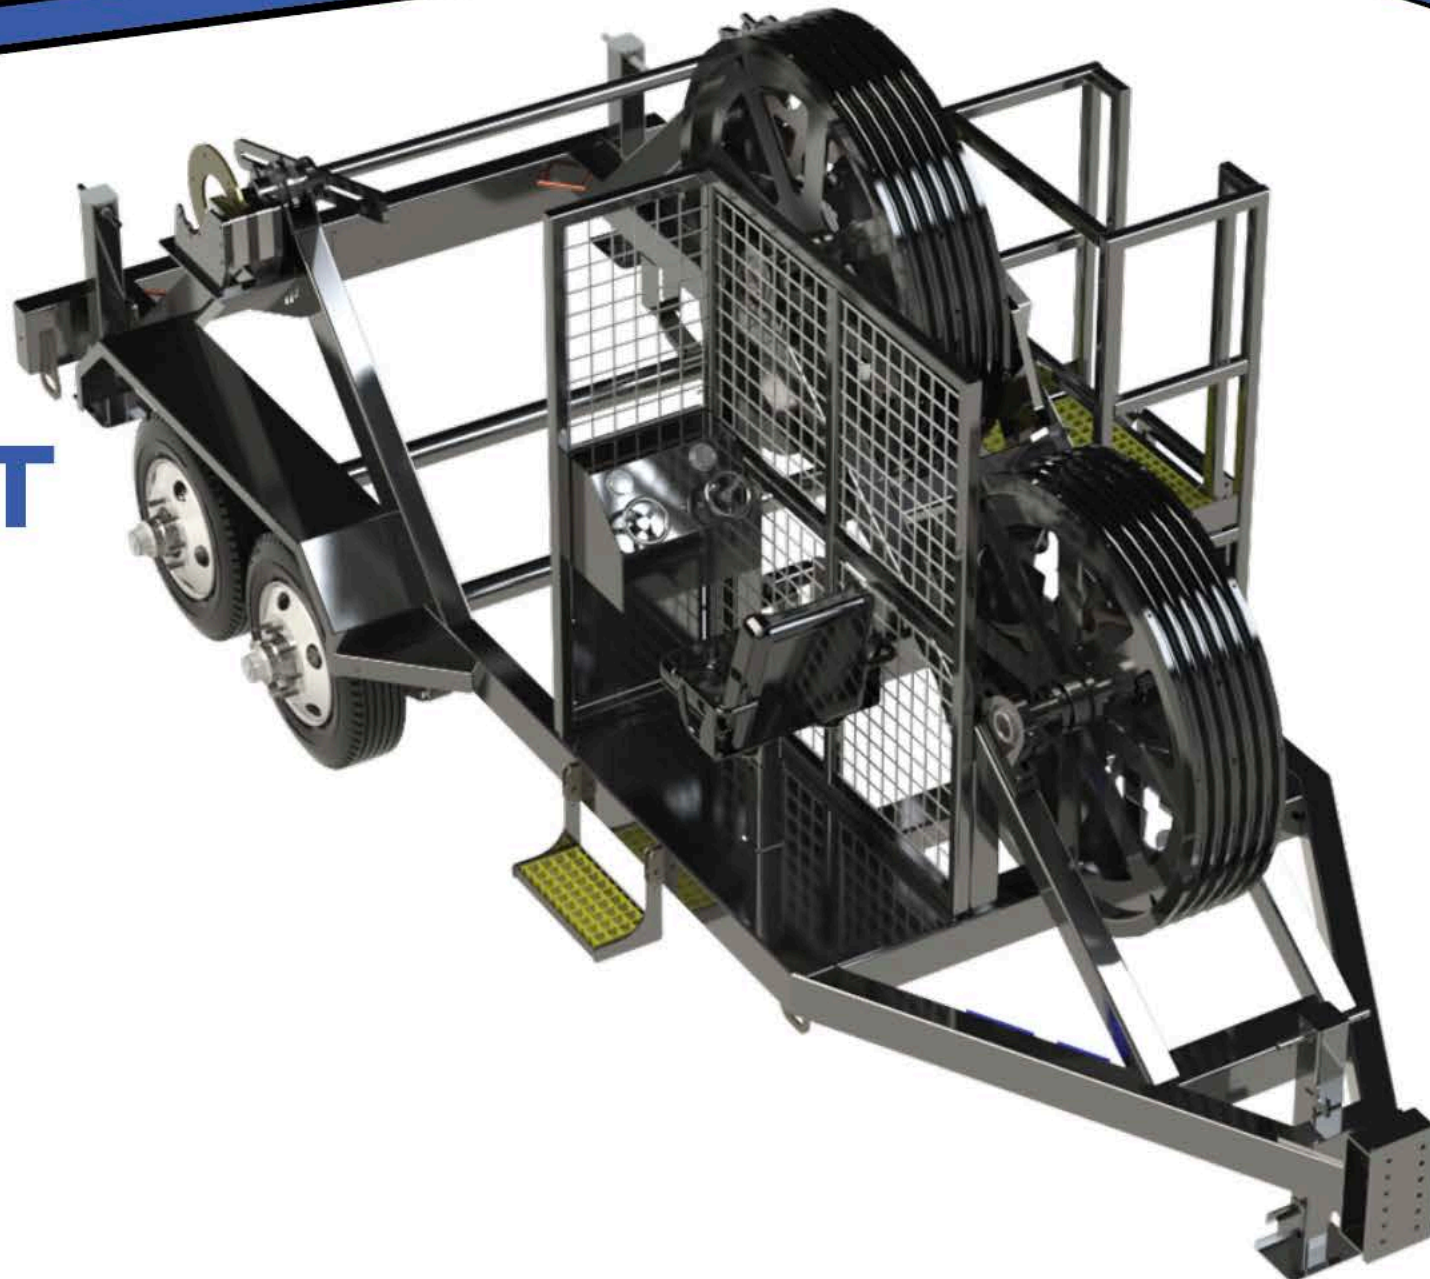

# 52" BULL WELL TENSIONER

### DIMENSIONS AND WEIGHTS

**Length:** 20' 5"    **Width:** 100" OAW  
**Height:** 9' 9"    **G.V.W.R.:** 20,500 lbs.  
**Empty Weight:** 7100 lbs.  
**Payload:** Approximately 13,400 lbs.

### STANDARD FEATURES

**Running Gear:** Two 10,000 lb. single wheel axle with oil bath hubs  
**Brakes:** 12 1/4" x 3-3/8" electric with self-charging break-away system  
**Landing Gear & Rear Jacks:** 12,000 lb. static drop leg jack  
**Wheels:** 16" 8-hole Steel  
**Tires:** 235/80R 16" 14-Ply  
**Frame:** 6x4 rectangular tubing  
**Lights:** Sealed beam with waterproof wiring in nylon tubing  
**Toolbox:** 18"x18"x30"

### UNIT PERFORMANCE

**Continuous Rated Tension:** 5,000 lbs  
**Line Speed:** 0-4 mph

### REEL CAPACITY

**Maximum Reel Diameter:** 96"    **Maximum Reel Width:** 60"  
**Maximum Reel Weight:** 12,000 lbs  
**Shaft Diameter:** 2 5/8"  
**Shaft Loading:** Quick change reel shaft with accompanying hooks  
**Reel Brake:** Hydraulic actuated calipers from operator station with 16" diameter bronze rotor

### BULLWHEEL SYSTEM

**Reel Diameter:** 52" OD    **Reel Width:** 12"  
**Conductor Grooves:** 5 at 1-1/2" diameter  
**Bullwheel Brakes:** Hydraulic actuated calipers from operator station with 36" diameter A588 rotors  
**Conductor Guide:** 5 roller fairlead to insure proper alignment with quick flip latch to allow operator to run left or right hand lay cable