


## Model 2K4DP

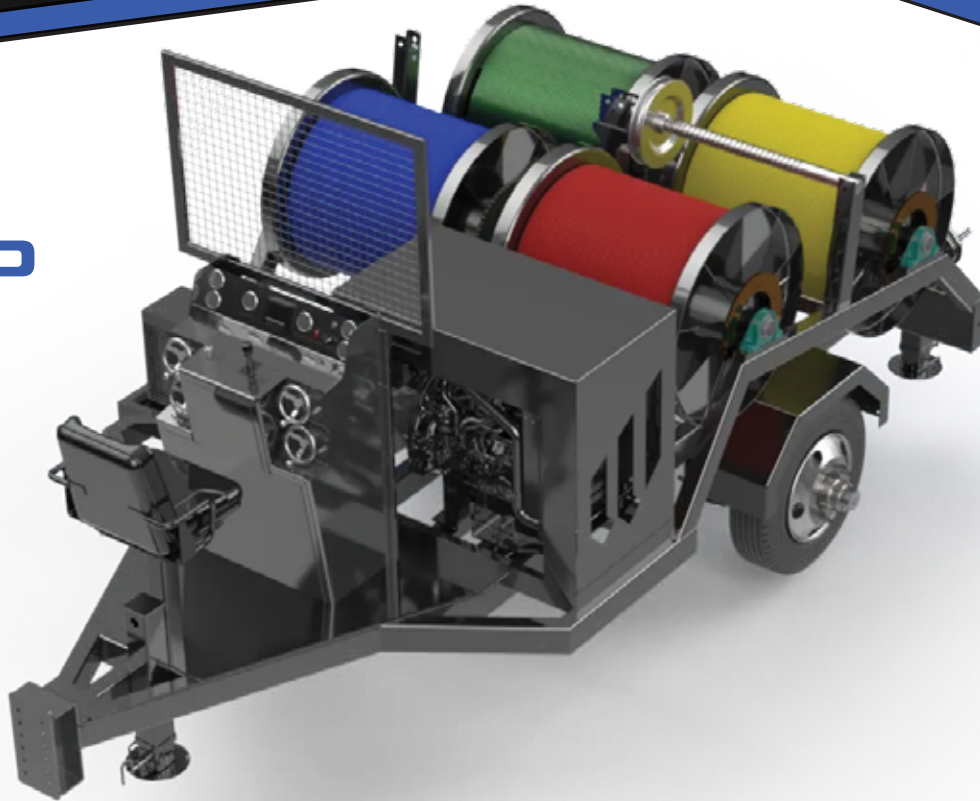

# 2K 4 DRUM OVERHEAD PULLER

### DIMENSIONS AND WEIGHTS

**Length:** 15' 5"      **Width:** 94" OAW  
**Height:** 8' 11"      **G.V.W.R.:** 11,400 lbs.  
**Empty Weight:** 6000 lbs.  
**Payload:** Approximately 5,400 lbs.

### UNIT PERFORMANCE

**Continuous Torque Rating:** 36,000 in. lbs  
**Line Speed:** 4 mph average  
**Actual Full Drum Pull Rating:** 2,000 lbs

### PULLING REEL SPECIFICATIONS

**Quantity:** Four      **Reel Diameter:** 36" OD  
**Reel Inside Width:** 30 3/4"  
**Core Diameter:** 10 3/4"  
**Approximate Line Capacity:**  
 9000 ft. of 1/2" synthetic rope  
**Reel Brakes:** Hydraulic actuated caliper  
 from operator station with 16" diameter Disc  
**Reel Engagement:**  
 Mechanical clutch engage with lockout function

### STANDARD FEATURES

**Engine:** 49 hp water cooled diesel  
**Levelwind:** Automatic lead screw  
**Running Gear:**  
 One 10,000 lb. single wheel axle with oil bath hubs  
**Brakes:**  
 12 1/4" x 5" electric with self-charging break-away system  
**Landing Gear:** 12,000 lb. static drop leg jack  
**Rear Jacks:** Spring loaded retraction, manual pin type  
**Wheels:** 16" 8-hole Steel  
**Tires:** 235/80R 16" 14-Ply  
**Frame:** 5x3 rectangular tubing  
**Lights:** Sealed beam with waterproof wiring in nylon tubing  
**Controls:** Electric over hydraulic joystick for payout and  
 take up. HP limiting function to allow operator  
 maintainableline speed from full drum to empty drum  
**Pressure Control:** Hydraulic pressure control valve  
**Hydraulics:** Closed loop hydrostatic hydraulic drive.  
 Integrated 4.4 gal hydraulic tank and cooler.  
 Hydraulic gearbox with sprocket chain driven drums.  
 Emergency shut down feature for operator safety