GENERAL NOTES:

1. OPERATION TYPE MAY BE PUSH-UP, HAND CHAIN OR ELECTRIC.
2. FOR CRITICAL FITS DUE TO REDUCED AVAILABLE HEADROOM OR SIDEROOM CLEARANCES, CONSULT FACTORY.
3. CLEARANCES SHOWN ARE MAXIMUMS. LESSER CLEARANCES MAY BE POSSIBLE.
4. UNLESS OTHERWISE NOTED, DOORS SHALL BE PROVIDED WITH SLIDE LOCKS AT EACH END OF BOTTOM BAR, ENGAGING GUIDES IN THE LOCKED POSITION.
5. SERIES 2250DB IS AN INSULATED SERIES 2000DB
6. ALL OPENING PREPARATION, ELECTRICAL POWER AND FIELD PAINTING SHALL BE PROVIDED BY OTHERS.
7. CURTAIN FINISH SHALL BE SILICONE POLYESTER PRE-PAINT OVER GALVANIZED GRADE 80 STEEL.
8. VISION PANELS ARE AVAILABLE.
9. MAXIMUM OPEN SIZE: 12'-0 X 18'-0"

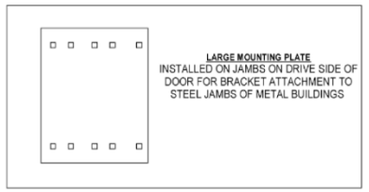

LARGE MOUNTING PLATE
INSTALLED ON JAMBS ON DRIVE SIDE OF DOOR FOR BRACKET ATTACHMENT TO STEEL JAMBS OF METAL BUILDINGS



SMALL MOUNTING PLATE
INSTALLED ON JAMBS ON NON-DRIVE SIDE OF DOOR FOR BRACKET ATTACHMENT TO STEEL JAMBS OF METAL BUILDINGS







(*) FOR PUSH-UP OPERATION.....5"
FOR HAND CHAIN OPERATION.....8 ½"
FOR ELECTRIC OPERATION.....6 ½"
FOR OUTSIDE OF CHAIN DRIVE.....8 ½"

BRACKET ATTACHMENT

STEEL JAMBS: 3/8 - 16 X 1 1/4" HEX BOLT AND NUT.
CONCRETE/MASONRY JAMBS: 5/16" X 2-1/4" TAPCON XL.
WOOD JAMBS: 1/4" X 2" LAG SCREW.

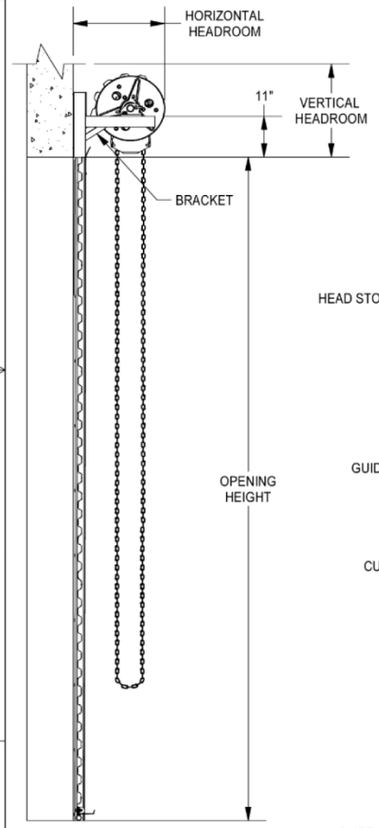

END VIEW

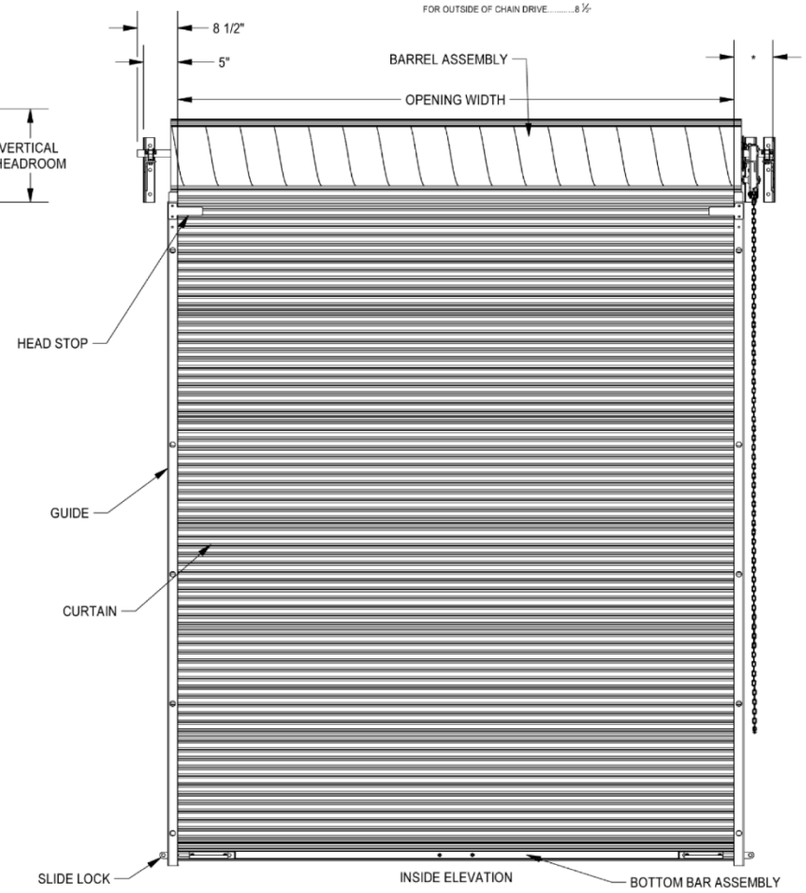

HEADROOM REQUIRED		
OPENING HEIGHT	VERTICAL HEADROOM	HORIZONTAL HEADROOM
THUR 10'-0"	22"	21"
OVER 10'-0" THRU 14'-0"	24"	21"
OVER 14'-0" THRU 18'-0"	26"	21"



DETAIL A



BOTTOM BAR ASSEMBLY



26 GA CURTAIN PANEL DETAIL

FACTORY ORDER NUMBER	DOOR SERIES	QTY	OPENING SIZE		JAMB TYPE			OUTSIDE CURTAIN COLOR	OPERATION			OPERATION HAND	WEATHERSTRIP			ADDED OPTIONS
			WIDTH	HEIGHT	STEEL	CONC./ MAS	WOOD		PUSH UP	REDUCED CHAIN	ELECTRIC		TOP	HEADER	SIDE	

NOTES:

814003-0000 11/16/2022

LIGHT DUTY COMMERCIAL ROLL UP DOORS

CUSTOMER NUMBER:	DATE:
CUSTOMER NAME:	CONTACT:
PROJECT NAME:	
PROJECT LOCATION:	
PLANT:	SALESPERSON:
DRAWN BY:	DRAWN BY DATE:
DRAWING NUMBER:	SHT: OF: